TEAC

SERVICE MANUAL

DR-L700

DVD Receiver

DVD VIDEO COMPACT disc DIGITAL VIDEO DOLBY DIGITAL PRO LOGIC II DIGITAL dts SURROUND

CONTENTS

1 SPECIFICATIONS 2
2 ADJUSTMENTS AND CHECKS 3
3 EXPLODED VIEWS AND PARTS LIST 6
4 PC BOARDS AND PARTS LIST 8
5 INCLUDED ACCESSORIES 15

NOTES

- PC boards shown are viewed from parts side.
- The parts with no reference number or no parts number in the exploded views are not supplied.
- As regards the resistors and capacitors, refer to the circuit diagrams contained in this manual.
- ⚠ Parts marked with this sign are safety critical components. They must be replaced with identical components - refer to the appropriate parts list and ensure exact replacement.
- Parts of [ ] mark can be used only with the version designated.
  [US]:U.S.A. [C]:CANADA [E]:EUROPE [UK]:U.K.

Effective : March, 2003

S-0085A

1 SPECIFICATIONS

DVD Player

Pickup..... Semiconductor laser, Wavelength 650 nm
Signal system ..... NTSC (U.S.A./Canada model)
NTSC / PAL (Europe/U.K. model)
Video signal horizontal resolution..... More than 480 lines (DVD)
Video signal-to-noise ratio..... More than 55 dB (DVD)
Audio frequency response (at 2 CH stereo mode) .....
20 Hz ~ 20 kHz (+1/-3 dB)
Audio signal-to-noise ratio ..... More than 80 dB
Total harmonic distortion ..... Less than 0.01 %

FM Tuner

System. ..... PLL quartz-locked digital synthesizer system
Tuning range .....
87.50 ~ 108.00 MHz (100 kHz step) (U.S.A./Canada model)
87.50 ~ 108.00 MHz (50 kHz step) (Europe/U.K. model)
Antenna terminals..... 75 ohms, unbalanced
Intermediate frequency ..... 10.7 MHz

AM Tuner

System. ..... PLL quartz-locked digital synthesizer system
Tuning range .....
530 ~ 1720 kHz (10 kHz interval) (U.S.A./Canada model)
522 ~ 1629 kHz (9 kHz interval) (Europe/U.K. model)

Video outputs

CVBS Video ..... 1 Vp-p 75 ohms
S-video ..... Y: 1 Vp-p 75 ohms
C: NTSC 0.286 Vp-p 75 ohms
C: PAL 0.3 Vp-p 75 ohms (Europe/U.K. model)

Audio Outputs

Line outputs ..... 300 mVrms, 2.2 kilo ohms
Power outputs ..... 30 W + 30 W (6 ohms, 1 kHz, THD 0.5%)

General

Power requirements ..... 120V AC, 60 Hz (U.S.A./Canada model)
230 V AC, 50 Hz (Europe/U.K. model)
Power consumption..... 50 W (STANDBY : 5 W)
Dimensions (WxHxD)..... 215 x 108 x 345 mm
Weight..... 3.3 kg
Operating temperature ..... 5 ˚C ~ 35 ˚C
Operating humidity..... 5 % ~ 90 %
Storage temperature ..... -20 ˚C ~ 55 ˚C
Accessories .....AM loop antenna x 1
FM antenna x 1
RCA video cable x 1
Remote control unit x 1
Batteries (AA, R6, SUM-3) x 2

- Design and specifications are subject to change without notice.
- Weight and dimensions are approximate.

Type of Discs That Can be Played on This System

This player can playback discs bearing any of the following marks:

U.S.A./Canada models

DVDs	Audio CDs, MP3

Europe/U.K. models

DVDs	Video CDs (version up to 2.0)	Audio CDs, MP3

SAFETY INFORMATION

This product has been designed and manufactured according to FDA regulations "title 21, CFR, chapter 1, subchapter J, based on the Radiation Control for Health and Safety Act of 1968", and is classified as a class 1 laser product. There is no hazardous invisible laser radiation during operation because invisible laser radiation emitted inside of this product is completely confined in the protective housings.
The label required in this regulation is shown ①.

● **CAUTION**
USE OF CONTROLS OR ADJUSTMENT OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

Optical pickup:	Type	: SF-HD3SE
	Laser output	: Less than 0.3 mW on the objective lens
	Wavelength	: 650±15 nm (CD), 780±25 nm (DVD)

① For U.S.A.

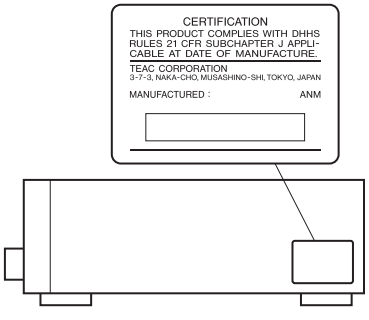
CERTIFICATION
THIS PRODUCT COMPLIES WITH DHHS RULES 21 CFR SUBCHAPTER J APPLICABLE AT DATE OF MANUFACTURE.
TEAC CORPORATION
3-7-3, NAKA-CHO, MUSASHINO-SHI, TOKYO, JAPAN
MANUFACTURED :
ANM

(side panel of the unit)

2 ADJUSTMENTS AND CHECKS

Service Information

Title:
Legacy Series : DC Offset Adjustment

Created Date:
May 20, 2004

Topic:
The adjustment method of Legacy series is indicated.

CR-L600 [DM, EUR, UK]

DC Voltmeter.....Connect to speaker output terminal

CHANNEL	ADJUST FOR	ADJUSTMENT
L	DC Voltmeter 0V (-30mV~+30mV)	VR21
R	DC Voltmeter 0V (-30mV~+30mV)	VR22

Adjustment Points: CR-L600_adj.png

AG-L800 [T/C, EUR, UK]

DC Voltmeter.....Connect to speaker output terminal

CHANNEL	ADJUST FOR	ADJUSTMENT
FRONT (L)	DC Voltmeter 0V (-30mV~+30mV)	VR31
FRONT (R)	DC Voltmeter 0V (-30mV~+30mV)	VR32
CENTER	DC Voltmeter 0V (-30mV~+30mV)	VR33
SORROUND (L)	DC Voltmeter 0V (-30mV~+30mV)	VR41
SORROUND (R)	DC Voltmeter 0V (-30mV~+30mV)	VR42

Adjustment Points: AG-L800_adj.png

DR-L700 [T/C, EUR, UK]

DC Voltmeter.....Connect to speaker output terminal

CHANNEL	ADJUST FOR	ADJUSTMENT
L	DC Voltmeter 0V (-30mV~+30mV)	VR51

R	DC Voltmeter 0V (-30mV~+30mV)	VR52

Adjustment Points: DR-L700_adj.png

Engineering Group, Overseas Business Unit, Consumer Products Sales

3 EXPLODED VIEWS AND PARTS LIST

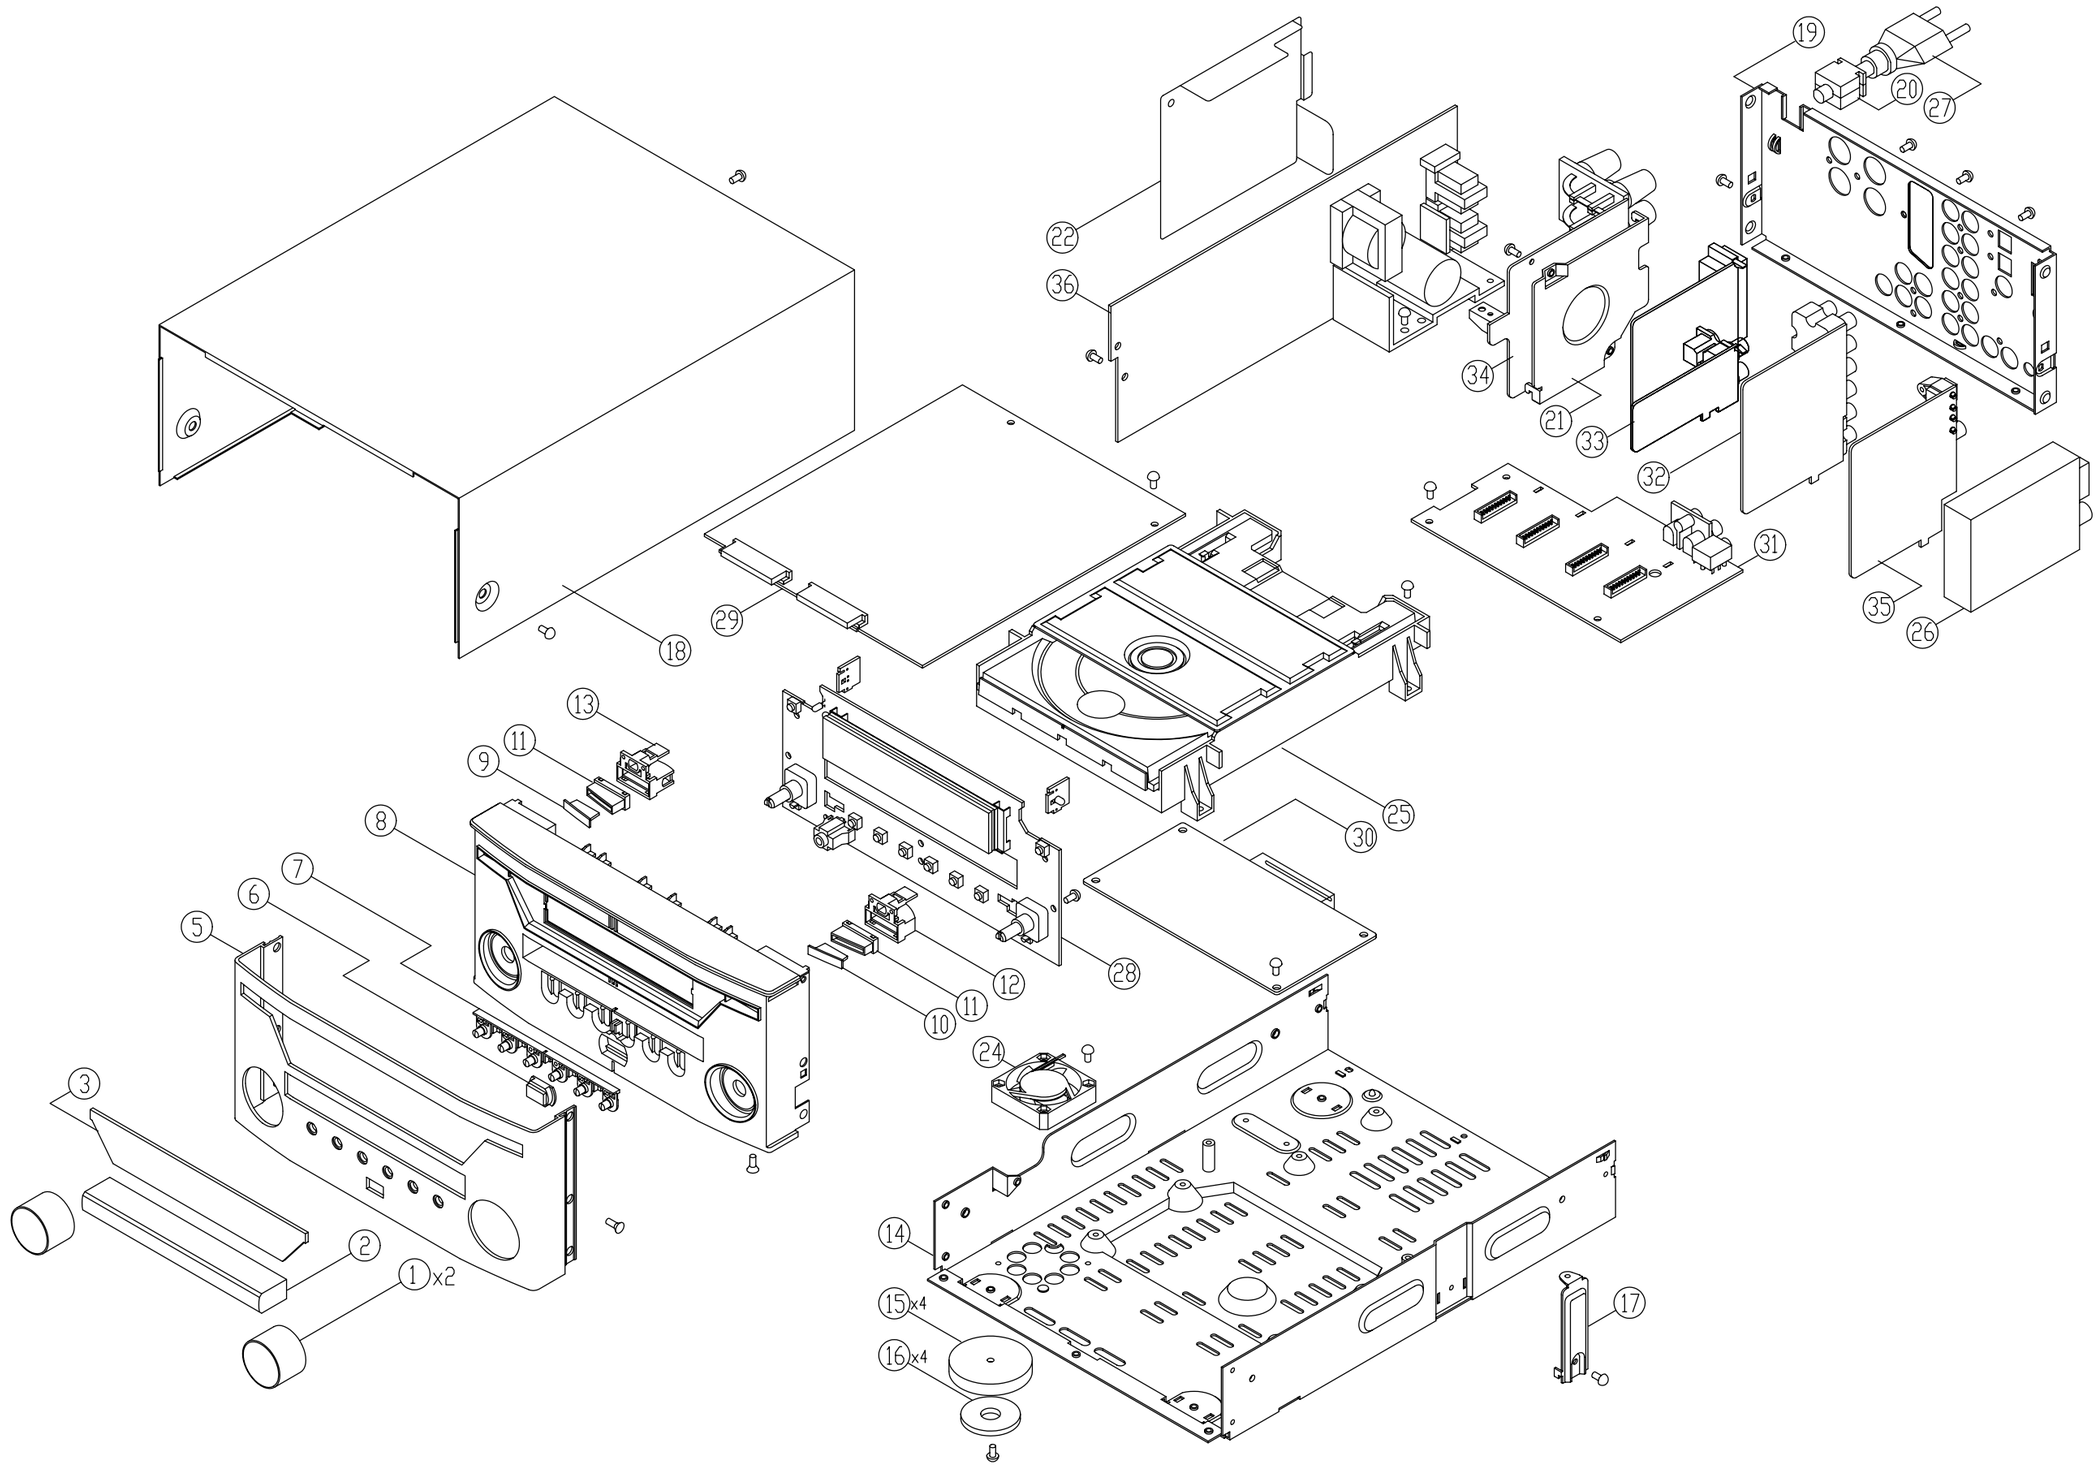

EXPLODED VIEW LIST

REF.NO.		PARTS NO.	DESCRIPTION	REMARKS
1		9A09616300	VOLUME KNOB ASSY	KGK1A079ZA
2		9A09611000	DOOR,DVD	CGR1A276M7ZK101
3		9A09616400	WINDOW,FIP [US,C]	KGU1A288Y
		9A09615600	WINDOW,FIP [E,UK]	KGU1A288Z
5		9A09616610	PANEL,FRONT(AL) [US,C]	KKM1A124YC35
		9A09616620	PANEL,FRONT(AL) [E,UK]	KKM1A124ZC35
6		9A09594600	WINDOW,SENSOR	CGU1A287A14K101
7		9A09610500	KNOB,BAND	CBT1A839C22
8		9A09611100	PANEL,MOLD	CGW1A343R6K101
9		9A09610400	KNOB,POWER(DIFFUSION)	CBT1A838RAZK101
10		9A09610300	KNOB,RDS(DIFFUSION)	CBT1A838RAYK101
11		9A09610800	KNOB,POWER(LIGHTING)	CBY1A029
12		9A09610600	KNOB,RDS	CBY1A027RA
13		9A09610700	KNOB,POWER	CBY1A028RA
14		9A09612600	CHASSIS,BOTTOM	CUA2A216
15		9A09609400	FOOT	HKL1A074Z
16		9A06229300	CUSHION,FOOT	KHG1A039Z
17		9A09611500	BRACKET,PCB	CMD1A395
18		9A09607700	TOP CABINET	CKC1B131S35
19		9A09611410	REAR PANEL [US,C]	CKF2A238X
		9A09611420	REAR PANEL [E,UK]	CKF1A238Z
20	⚠	9A06754900	BUSHING,AC CORD	KHR1A028
21		9A09608200	PLATE,HEAT SINK	CMY1A200
22		9A09611700	INSULATOR,SMPS	CMX2A133
24		9A09601800	FAN,MOTOR	HDMF410T12L1C01
25		9A09613700	1 DVD MECHANISM(HD3 P/U)	HJDRL-A700HD3
26		9A09611810	TUNER MODULE [US,C]	CNVMV001MA0-17
		9A09611820	TUNER MODULE [E,UK]	CNVMV114MA1-17
27	⚠	9A07872600	POWER CORD [US,C]	CJA523FBY
	⚠	9A07916700	POWER CORD [E]	CJA2B043Z
	⚠	9A07916800	POWER CORD [UK]	CJA2E045Z
28,29		9A09578910	MAIN PCB ASSY [US,C]	COP11527C
		9A09578920	MAIN PCB ASSY [E,UK]	COP11527B
30		----------	DVD MAIN PCB ASSY [US,C]	
		----------	DVD MAIN PCB ASSY [E,UK]	
31,32,33		9A09578910	MAIN PCB ASSY [US,C]	COP11527C
		9A09578920	MAIN PCB ASSY [E,UK]	COP11527B
34,35		9A09578510	AMP PCB ASSY	COP11526B
36		9A09611910	SMPS PCB ASSY [US,C]	COPDDS115B
		9A09611920	SMPS PCB ASSY [E,UK]	COPDDS115A
		9A09612900	CARD CABLE	CWC1B4A21A100B6
		9A09613000	CARD CABLE	CWC1C4A13B080B
		9A09613100	CARD CABLE(SHIELD)	CWC3B2A25A150B6
		9A09607900	FERRITE,RING	CLZ9W003Z

4 PC BOARDS AND PARTS LIST

MAIN PCB (MAIN GATHER)

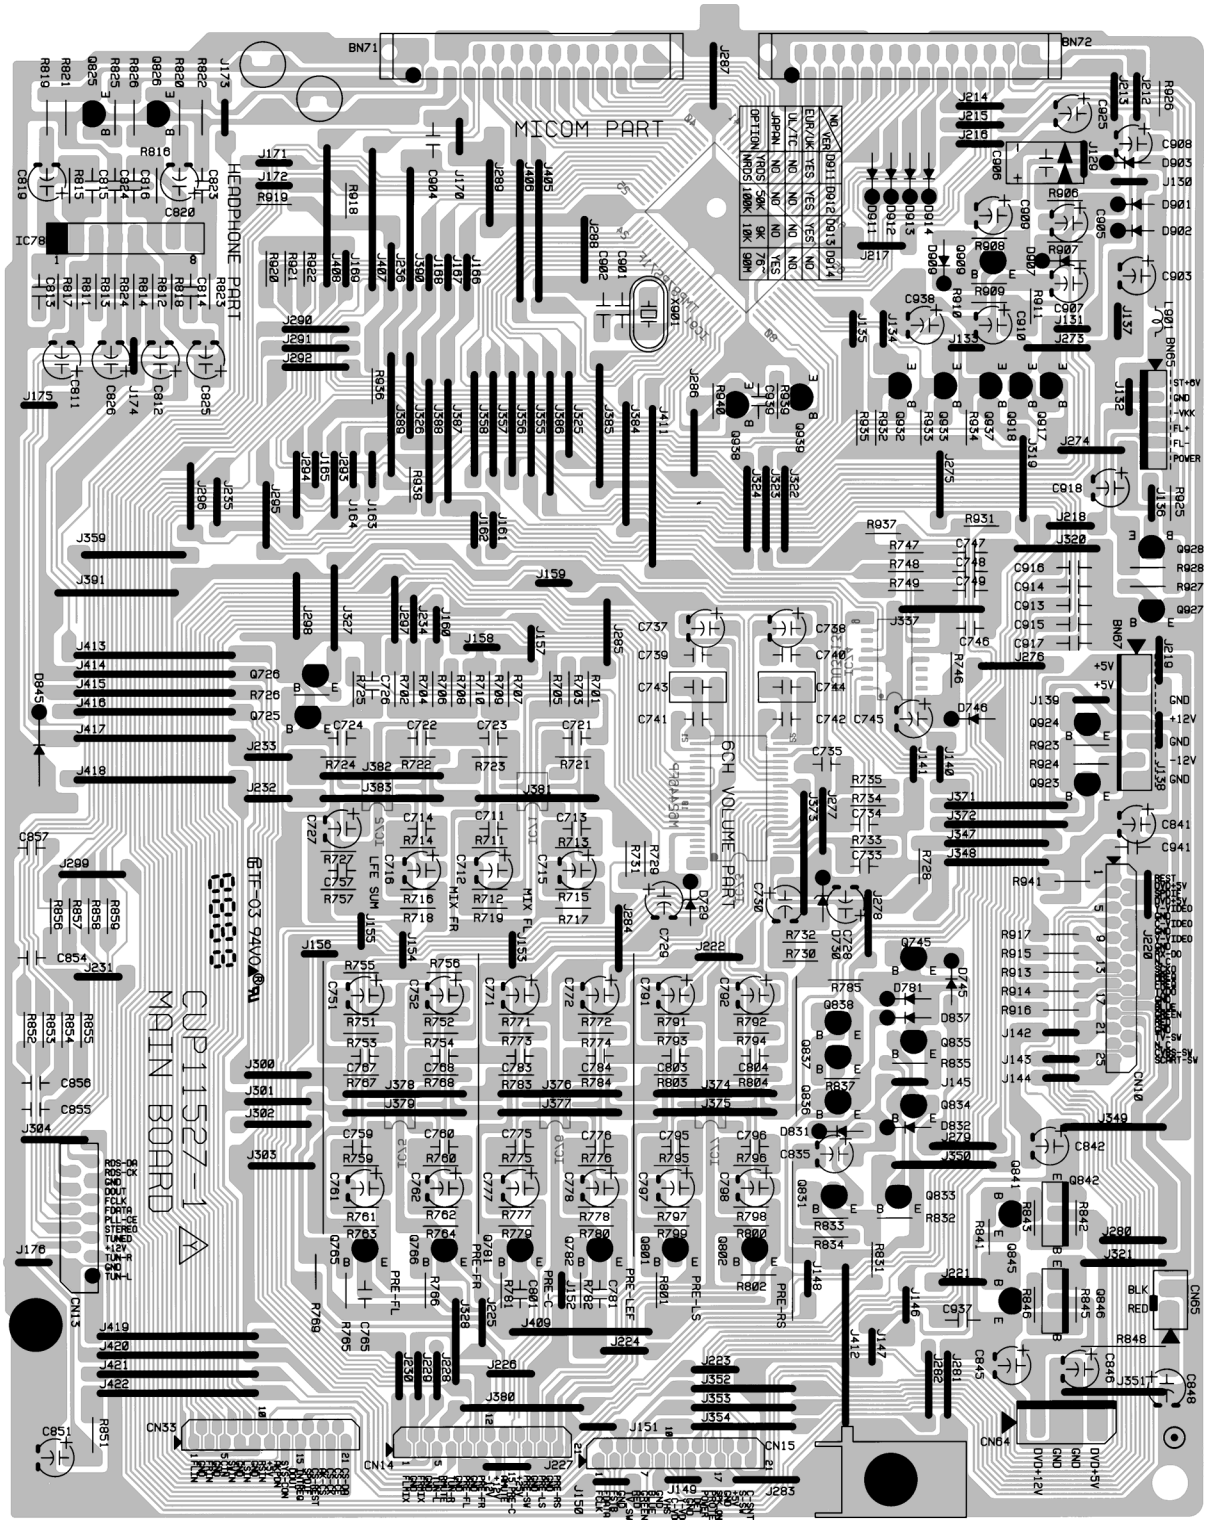

FRONT PCB (MAIN GATHER)

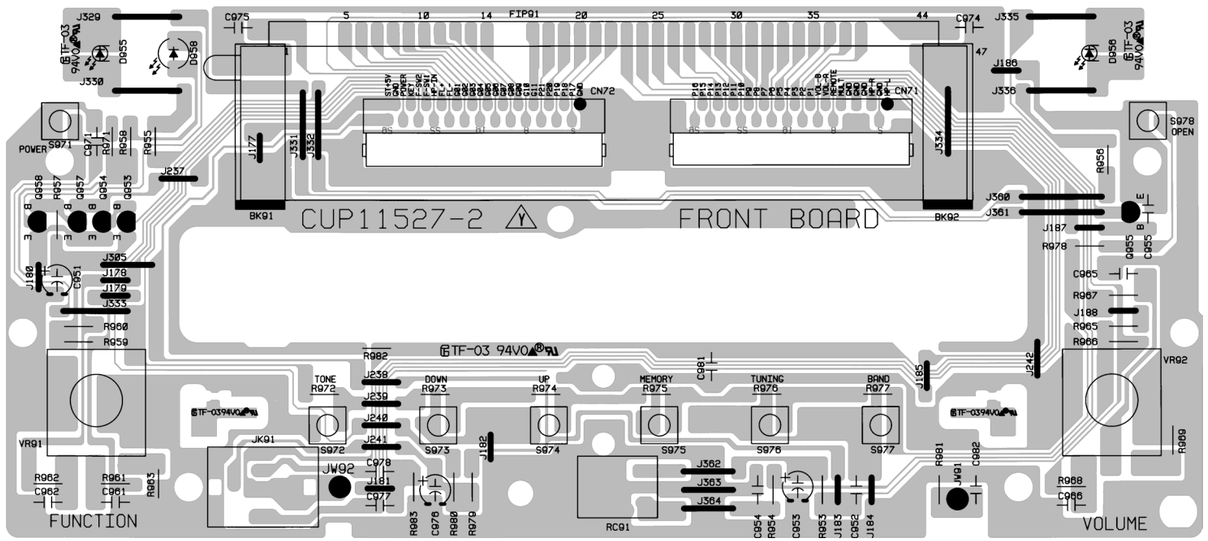

AUDIO IN/OUT PCB (MAIN GATHER)

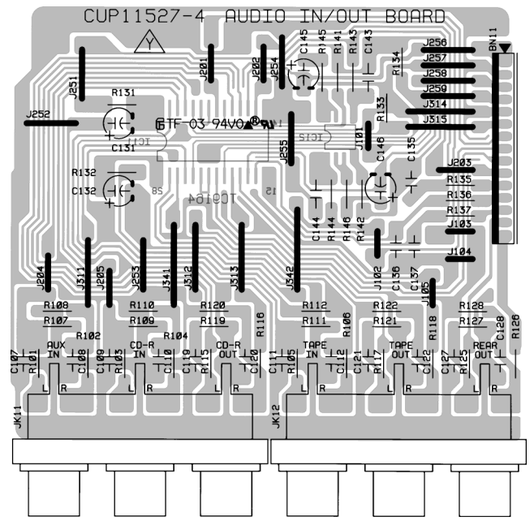

CONNECTOR PCB (MAIN GATHER)

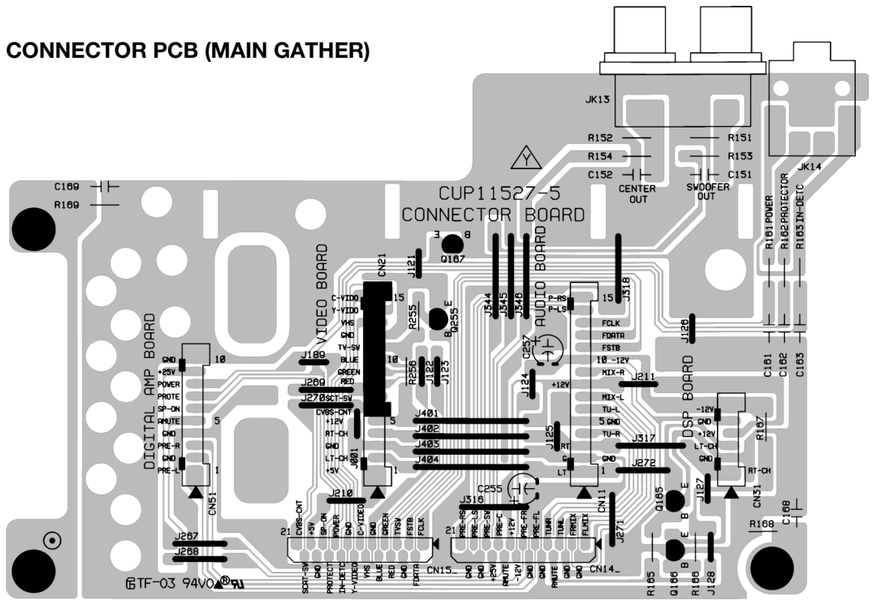

VIDEO PCB [US,C] (MAIN GATHER)

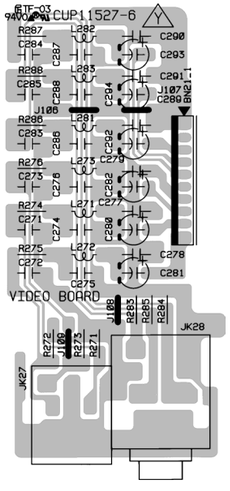

VIDEO PCB [E,UK] (MAIN GATHER)

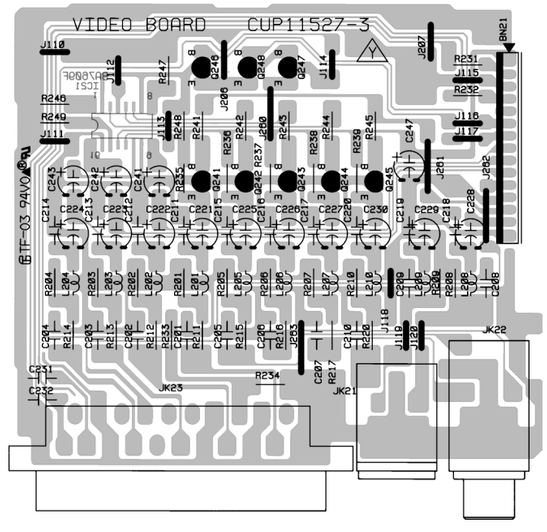

DVD MAIN PCB (SIDE A)

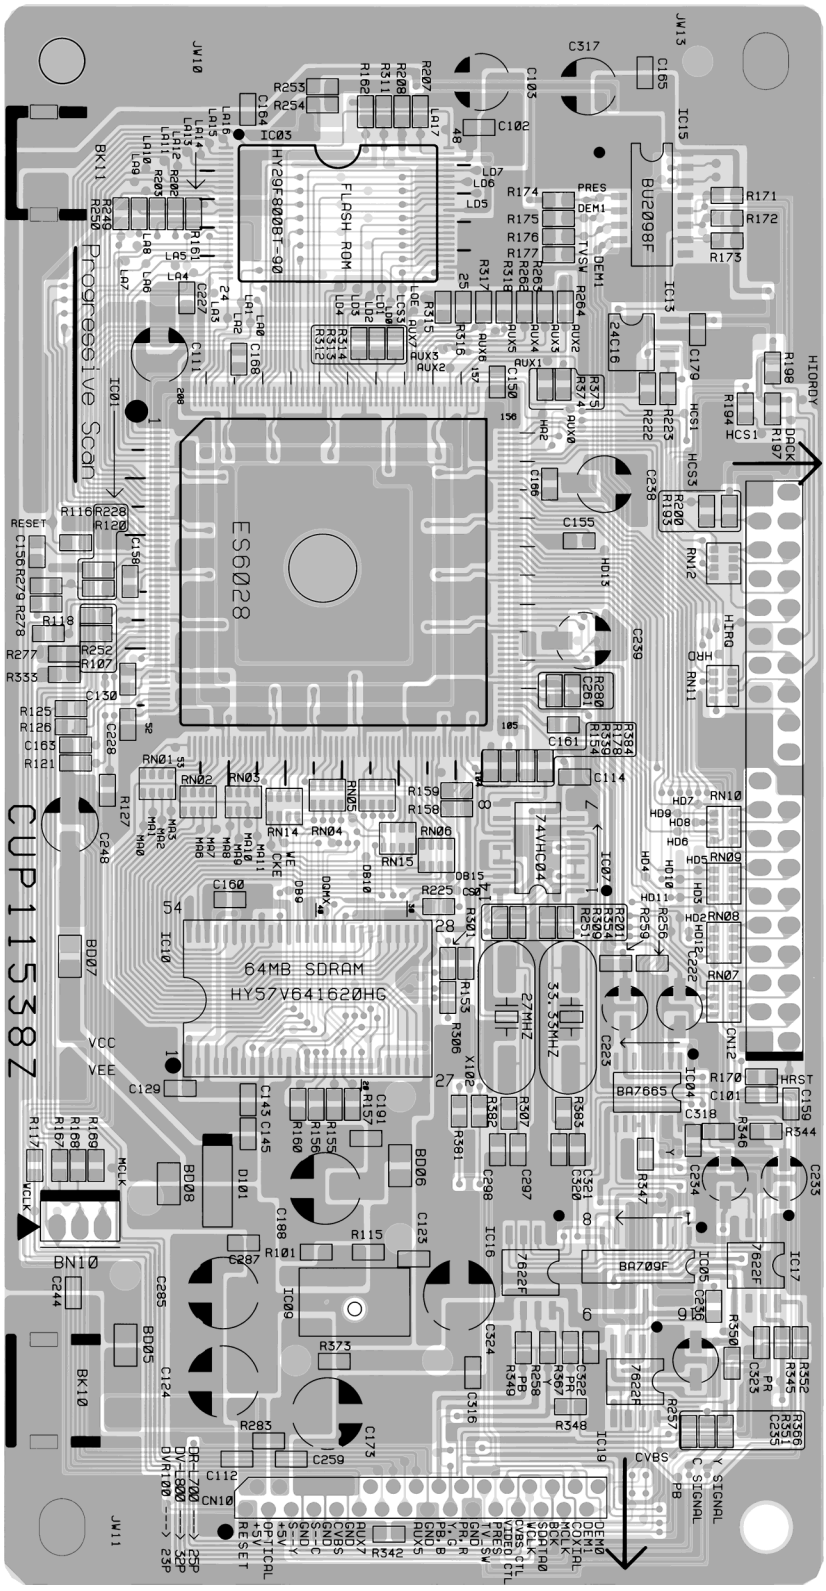

(About 150%)

DVD MAIN PCB (SIDE B)

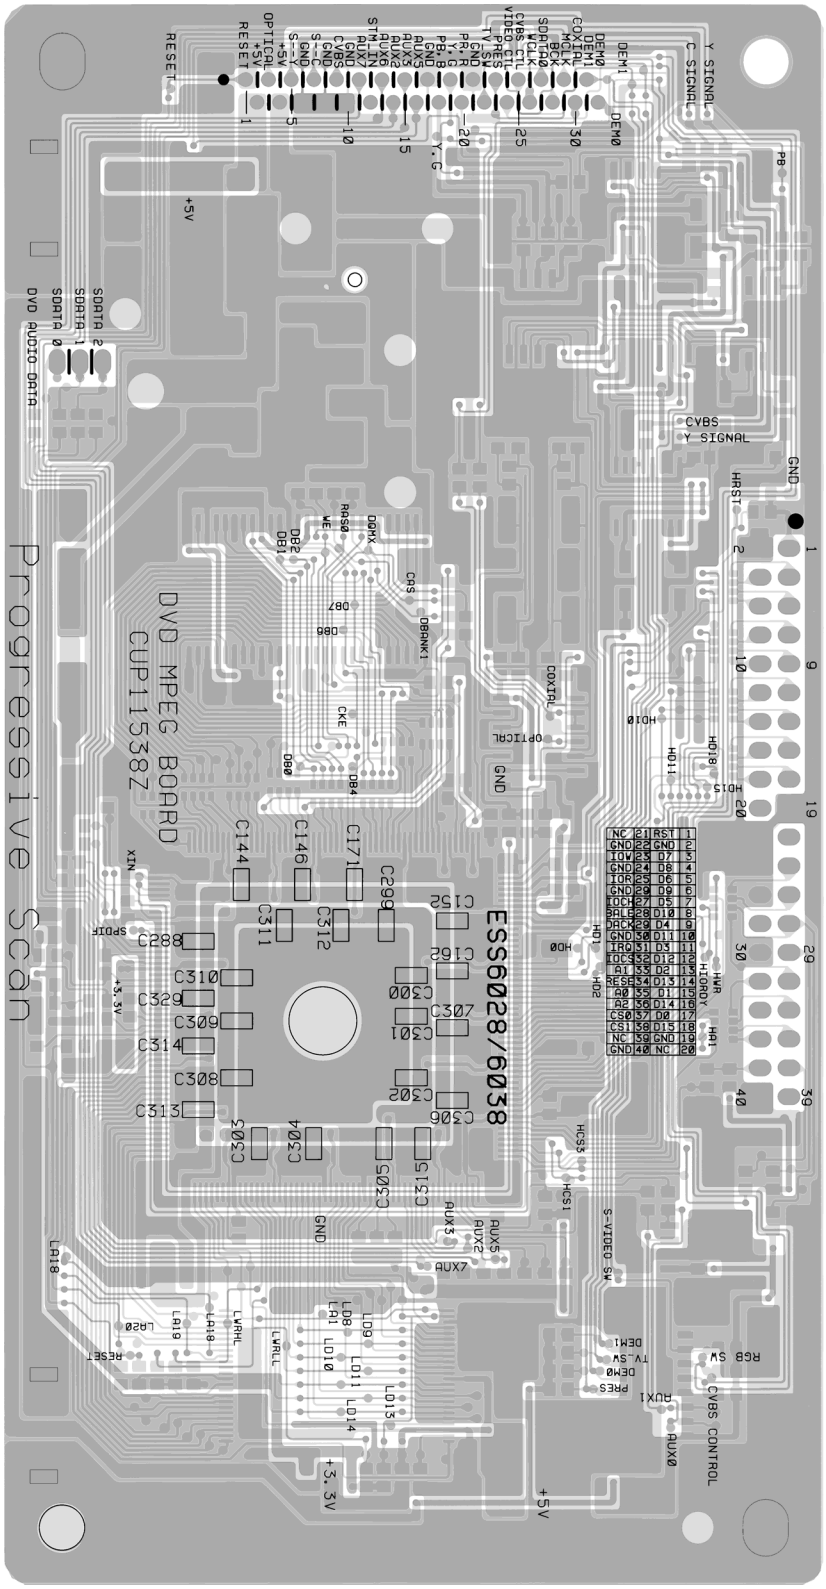

(About 150%)

AMP PCB (AMP GATHER)

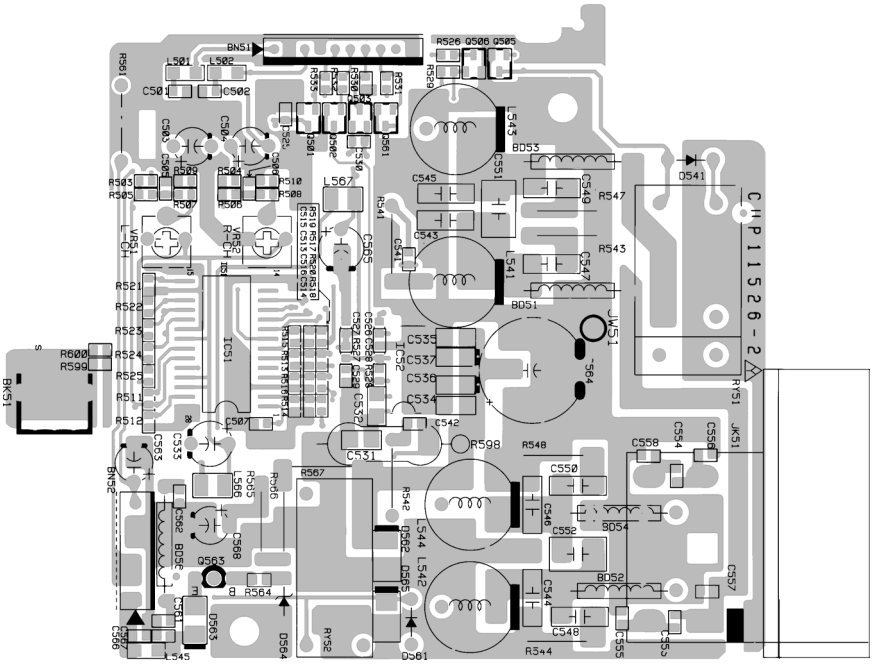

DSP PCB (AMP GATHER)

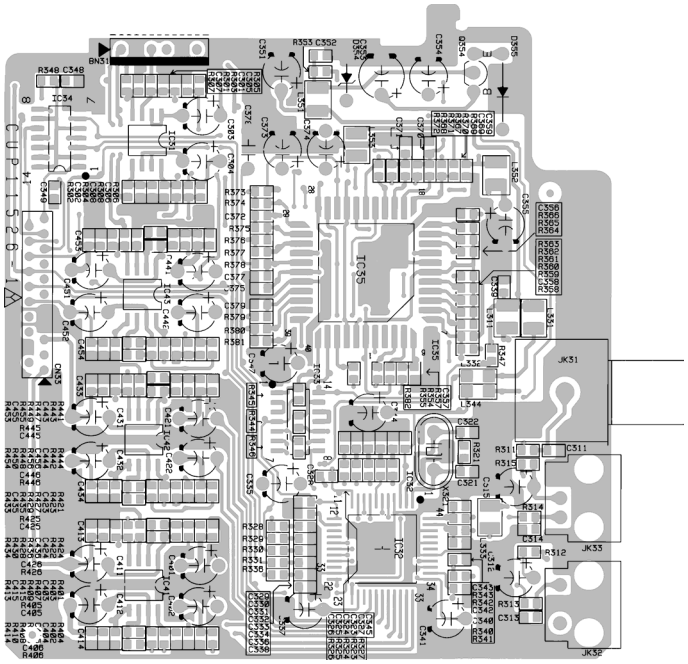

MAIN PCB ASSY (GATHER)

REF.NO.	PARTS NO.	DESCRIPTION
	9A09578910	MAIN PCB ASSY [US,C]
	9A09578920	MAIN PCB ASSY [E,UK]
	9A09579100	MAIN PCB
	9A09608000	PLATE,EARTH
BK91,BK92	9A08877300	BRACKET,FLT
BN11	9A09606200	WAFER
BN21	9A08036700	WAFER [US,C]
BN21	9A09606200	WAFER [E,UK]
BN71,BN72	9A09285800	FLEXIBLE CONNECTOR(SOCKET)
C906	9A09275000	C,0.1F GOLD
CN10	9A09616500	WAFER,CARD CABLE
CN11	9A09606100	WAFER
CN13	9A09279500	WAFER,CARD CABLE
CN14,CN15	9A08789600	WAFER,CARD CABLE
CN21	9A08036600	WAFER,MOLEX 35336-1010[US,C]
CN21	9A09606100	WAFER [E,UK]
CN31	9A07889700	WAFER,MOLEX 35336-0610
CN33	9A08789600	WAFER,CARD CABLE
CN51	9A08036600	WAFER,MOLEX 35336-1010
CN64	9A05329300	WAFER,MOLEX 5267-04A
CN65	9A08219500	WAFER
CN71,CN72	9A09285700	FLEXIBLE CONNECTOR(PLUG)
D729,D730	9A07903000	DIODE,ZENER MTZJ7.5A
D745,D746	9A08878200	DIODE,1SS133T-77
D781	9A08878200	DIODE,1SS133T-77
D831,D832	9A08878200	DIODE,1SS133T-77
D837	9A08878200	DIODE,1SS133T-77
D901,D902	9A05194600	DIODE,1N4003SRT
D903	9A08878200	DIODE,1SS133T-77
D907,D909	9A08878200	DIODE,1SS133T-77
D911-D913	9A08878200	DIODE,1SS133T-77 [E,UK]
D955,D956	9A09563300	LED,BLUE
D958	9A09344400	LED,YELLOW
FIP1	9A09571000	F.I.P
IC11	9A09340400	IC,TC9164AF
IC12	9A08163400	IC,NJM2068MD
IC21	9A09614800	IC,BA7609F [E,UK]
IC71,IC72	9A08163400	IC,NJM2068MD
IC73	9A09604000	IC,M62446AFP
IC74	9A09604100	IC,NJU3713G
IC75-IC77	9A08163400	IC,NJM2068MD
IC78	9A08163500	IC,NJM4556AL
IC91	9A09556200	IC,HVIANAM1351DAT(PRGMD)
JK11,JK12	9A09559000	JACK,BOARD
JK13	9A06230200	JACK,REMOTE 2P
JK14	9A06861800	JACK,HEADPHONE
JK21	9A09278800	JACK,S-VIDEO+VHS [E,UK]
JK22	9A09256100	JACK,IN/OUT [E,UK]
JK23	9A08152300	SCART CONNECTOR [E,UK]
JK27	9A09278800	JACK,S-VIDEO+VHS [US,C]

MAIN PCB ASSY (GATHER)

REF.NO.	PARTS NO.	DESCRIPTION
JK28	9A09256100	JACK,IN/OUT [US,C]
JK91	9A08126400	JACK,HEADPHONE(SILVER)
L201-L209	9A09613900	COIL,1.8UH [E,UK]
L271-L273	9A09613900	COIL,1.8UH [US,C]
L281-L283	9A09613900	COIL,1.8UH [US,C]
L901	9A07886600	COIL,10UH
Q165,Q166	9A09616000	TR,KTC2874BT
Q167	9A09604700	TR,KRA102MT
Q241-Q245	9A01387400	TR,KSA733CYT [E,UK]
Q246	9A09604900	TR,KRC102MT [E,UK]
Q247	9A09604700	TR,KRA102MT [E,UK]
Q248	9A09604900	TR,KRC102MT [E,UK]
Q255	9A09604900	TR,KRC102MT [E,UK]
Q725	9A09616000	TR,KTC2874BT
Q726	9A09604700	TR,KRA102MT
Q745	9A09604700	TR,KRA102MT
Q765,Q766	9A09616000	TR,KTC2874BT
Q781,Q782	9A09616000	TR,KTC2874BT
Q801,Q802	9A09616000	TR,KTC2874BT
Q825,Q826	9A09616000	TR,KTC2874BT
Q831	9A07888000	TR,KSC2316YT
Q833,Q834	9A09604900	TR,KRC102MT
Q835,Q836	9A09604700	TR,KRA102MT
Q837,Q838	9A09604900	TR,KRC102MT
Q841	9A03745000	TR,KSC2785YTA
Q842	9A09615900	TR,KSB1151Y
Q845	9A09604900	TR,KRC102MT
Q846	9A09615900	TR,KSB1151Y
Q909	9A07887900	TR,KSB811YT
Q917	9A09604700	TR,KRA102MT
Q918	9A09604900	TR,KRC102MT
Q923	9A07888000	TR,KSC2316YT
Q924	9A09604700	TR,KRA102MT
Q927	9A09604700	TR,KRA102MT
Q928	9A07898600	TR,KSD1021YT
Q932,Q933	9A09604900	TR,KRC102MT
Q937	9A09604900	TR,KRC102MT
Q938	9A09604700	TR,KRA102MT
Q939	9A09604900	TR,KRC102MT
Q953	9A09604700	TR,KRA102MT
Q954,Q955	9A09604900	TR,KRC102MT
Q957,Q958	9A09604900	TR,KRC102MT
RC91	9A08563600	SENSOR,REMOCON
S971-S978	9A07878500	SW,TACT SKHV10910G
VR91	9A09339900	VR,ENCODER
VR92	9A09614600	VR,ENCODER
X901	9A08879000	CRYSTAL

DVD MAIN PCB ASSY

REF.NO.		PARTS NO.	DESCRIPTION
		----------	DVD MAIN PCB ASSY [E,UK]
		9A09578400	DVD MAIN PCB
CN10		9A09616500	WAFER,CARD CABLE
CN12		9A09256400	40P HEADER
D101		9A09614700	DIODE,SCHOTTKEY BARRIER
IC01		9A09615200	IC,ES6028F
IC03		9A09615300	IC,FLASH MEMORY
IC05		9A09614800	IC,BA7609F
IC07		9A09615800	IC,74VHC04MX
IC09	⚠	9A09615500	IC,RC1117ST
IC10		9A09615400	IC,64M SDRAM
IC13		9A09615000	IC,EEPROM(16K)
IC15		9A09615100	IC,BU2098F
IC16		9A09614900	IC,BA7622F
IC19		9A09614900	IC,BA7622F
RN01-RN12		9A09614500	R,ARRAY 33X4
RN14,RN15		9A09614500	R,ARRAY 33X4
X102		9A09614200	CRYSTAL,CHIP 27MHZ

AMP PCB ASSY (GATHER)

REF.NO.		PARTS NO.	DESCRIPTION
		9A09578510	AMP PCB ASSY
		9A09578800	AMP & DSP PCB
		9A09608200	PLATE,HEAT SINK
BD51-BD54		9A07050600	BEAD,CORE
BD56		9A07050600	BEAD,CORE
BK51		9A09559700	BRACKET,PCB
BN31		9A07889800	CONNECTOR,MOLEX 35237-0610
BN51		9A08036700	WAFER
CN33		9A08789600	WAFER,CARD CABLE 21P
D354		9A09603500	DIODE,ZENER MTZJ4.3CT
D355		9A05194700	DIODE,1N4003ST
D541		9A08878200	DIODE,1SS133T-77
D561		9A08878200	DIODE,1SS133T-77
D562,D563		9A09614700	DIODE,SCHOTTKEY BARRIER
D564		9A07898400	DIODE,ZENER MTZJ5.6BT
D565		9A09614700	DIODE,SCHOTTKEY BARRIER
IC31		9A08163400	IC,NJM2068MD
IC32		9A09603700	IC,AK4586VQ
IC34		9A09615700	IC,74LCX08MX
IC35		9A09603900	IC,CS493264-CL
IC41-IC43		9A08163400	IC,NJM2068MD
IC51		9A09570400	IC,TC2000
IC52	⚠	9A09570600	IC,TP2050
JK31		9A09558800	JACK,INPUT 1P(GOLD)
JK32		9A09613800	MODULE,OPTICAL(RECEIVE)
JK33		9A08126500	MODULE,OPTICAL
JK51		9A09559100	TERMINAL,SPEAKER
L311		9A09614000	COIL,CHIP 22UH K
L331		9A09614000	COIL,CHIP 22UH K
L332		9A09602000	BEAD,FERRITE(CHIP)

AMP PCB ASSY (GATHER)

REF.NO.		PARTS NO.	DESCRIPTION
L333		9A09614000	COIL,CHIP 22UH K
L344		9A09602000	BEAD,FERRITE(CHIP)
L351-L353		9A09614000	COIL,CHIP 22UH K
L501,L502		9A09602000	BEAD,FERRITE(CHIP)
L541-L544		9A09559500	COIL,SPEAKER
L545		9A09602000	BEAD,FERRITE(CHIP)
L566,L567		9A09614000	COIL,CHIP 22UH K
Q354	⚠	9A07888000	TR,KSC2316YT
Q501,Q502		9A09605000	TR,CHIP KRC102S
Q503		9A09604800	TR,CHIP KRA102S
Q505,Q506		9A09605000	TR,CHIP KRC102S
Q561		9A09605000	TR,CHIP KRC102S
Q563	⚠	9A07888000	TR,KSC2316YT
R541,R542		9A09571600	R,METAL FILM
R598	⚠	9A09571700	R,METAL OXIDE FILM 2W 1K
RY51		9A09058500	RELAY
RY52		9A09569900	RELAY
VR51,VR52		9A09570700	VR,SEMI FIXED 4.7K OHM
X321		9A09614100	CRYSTAL

5 INCLUDED ACCESSORIES

INCLUDED ACCESSORIES

REF.NO.	PARTS NO.	DESCRIPTION	REMARKS
	9A09478400	OWNER'S MANUAL,EFS [US,C]	CQX1A794Z
	9A09478600	OWNER'S MANUAL,GIN [E]	CQX1A791Y
	9A09478500	OWNER'S MANUAL,EFS [E,UK]	CQX1A791Z
	9A09610200	REMOCON ASSY [US,C]	CARTDRL700TC
	9A09610220	REMOCON ASSY [E,UK]	CARTDRL700EUR
	9A09055200	BATTERY	HABAAM1.5V
	9A09562000	FM 1 POLE ANT [US,C]	CSA1A019Z
	9A09572700	FM 1 POLE ANT [E,UK]	CSA1A018Z
	9A09562100	AM LOOP ANT	CSA1A020Z
	9A09611300	PIN CORD,1P	CJS4M023Z

TEAC BLOCK DIAGRAM DR-L700

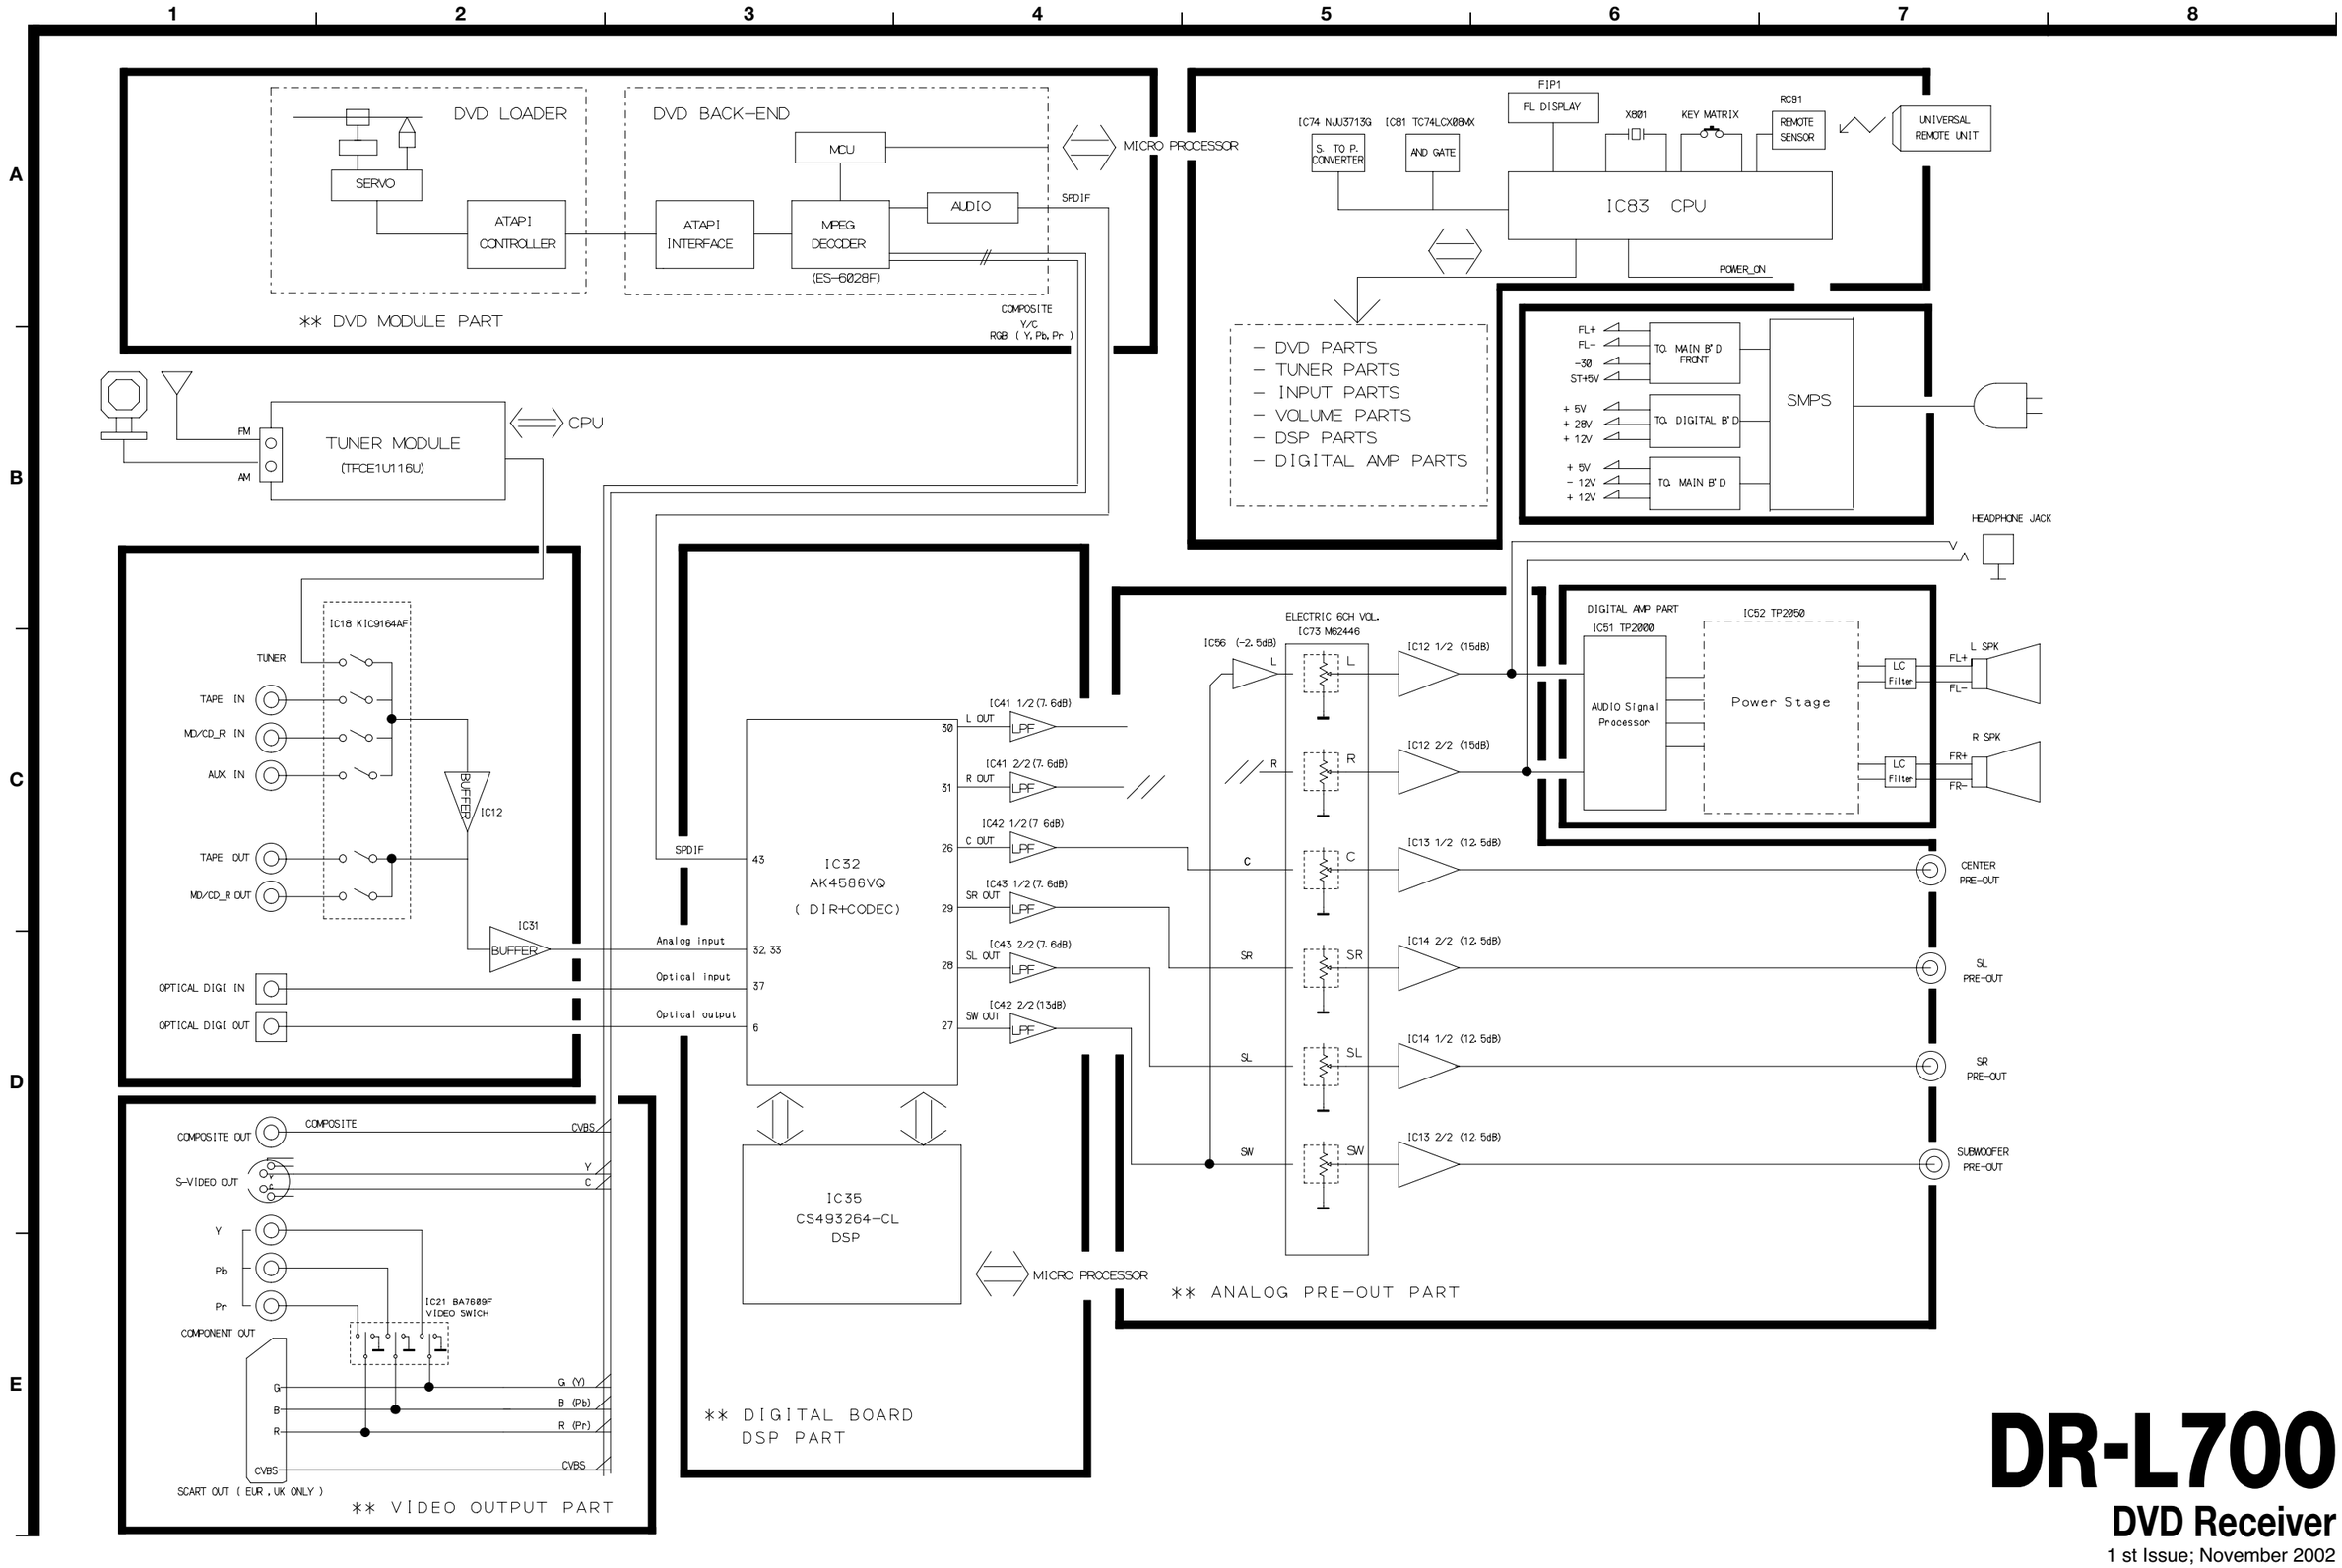

DR-L700

DVD Receiver

1 st Issue; November 2002

TEAC **WIRING DIAGRAM** **DR-L700**

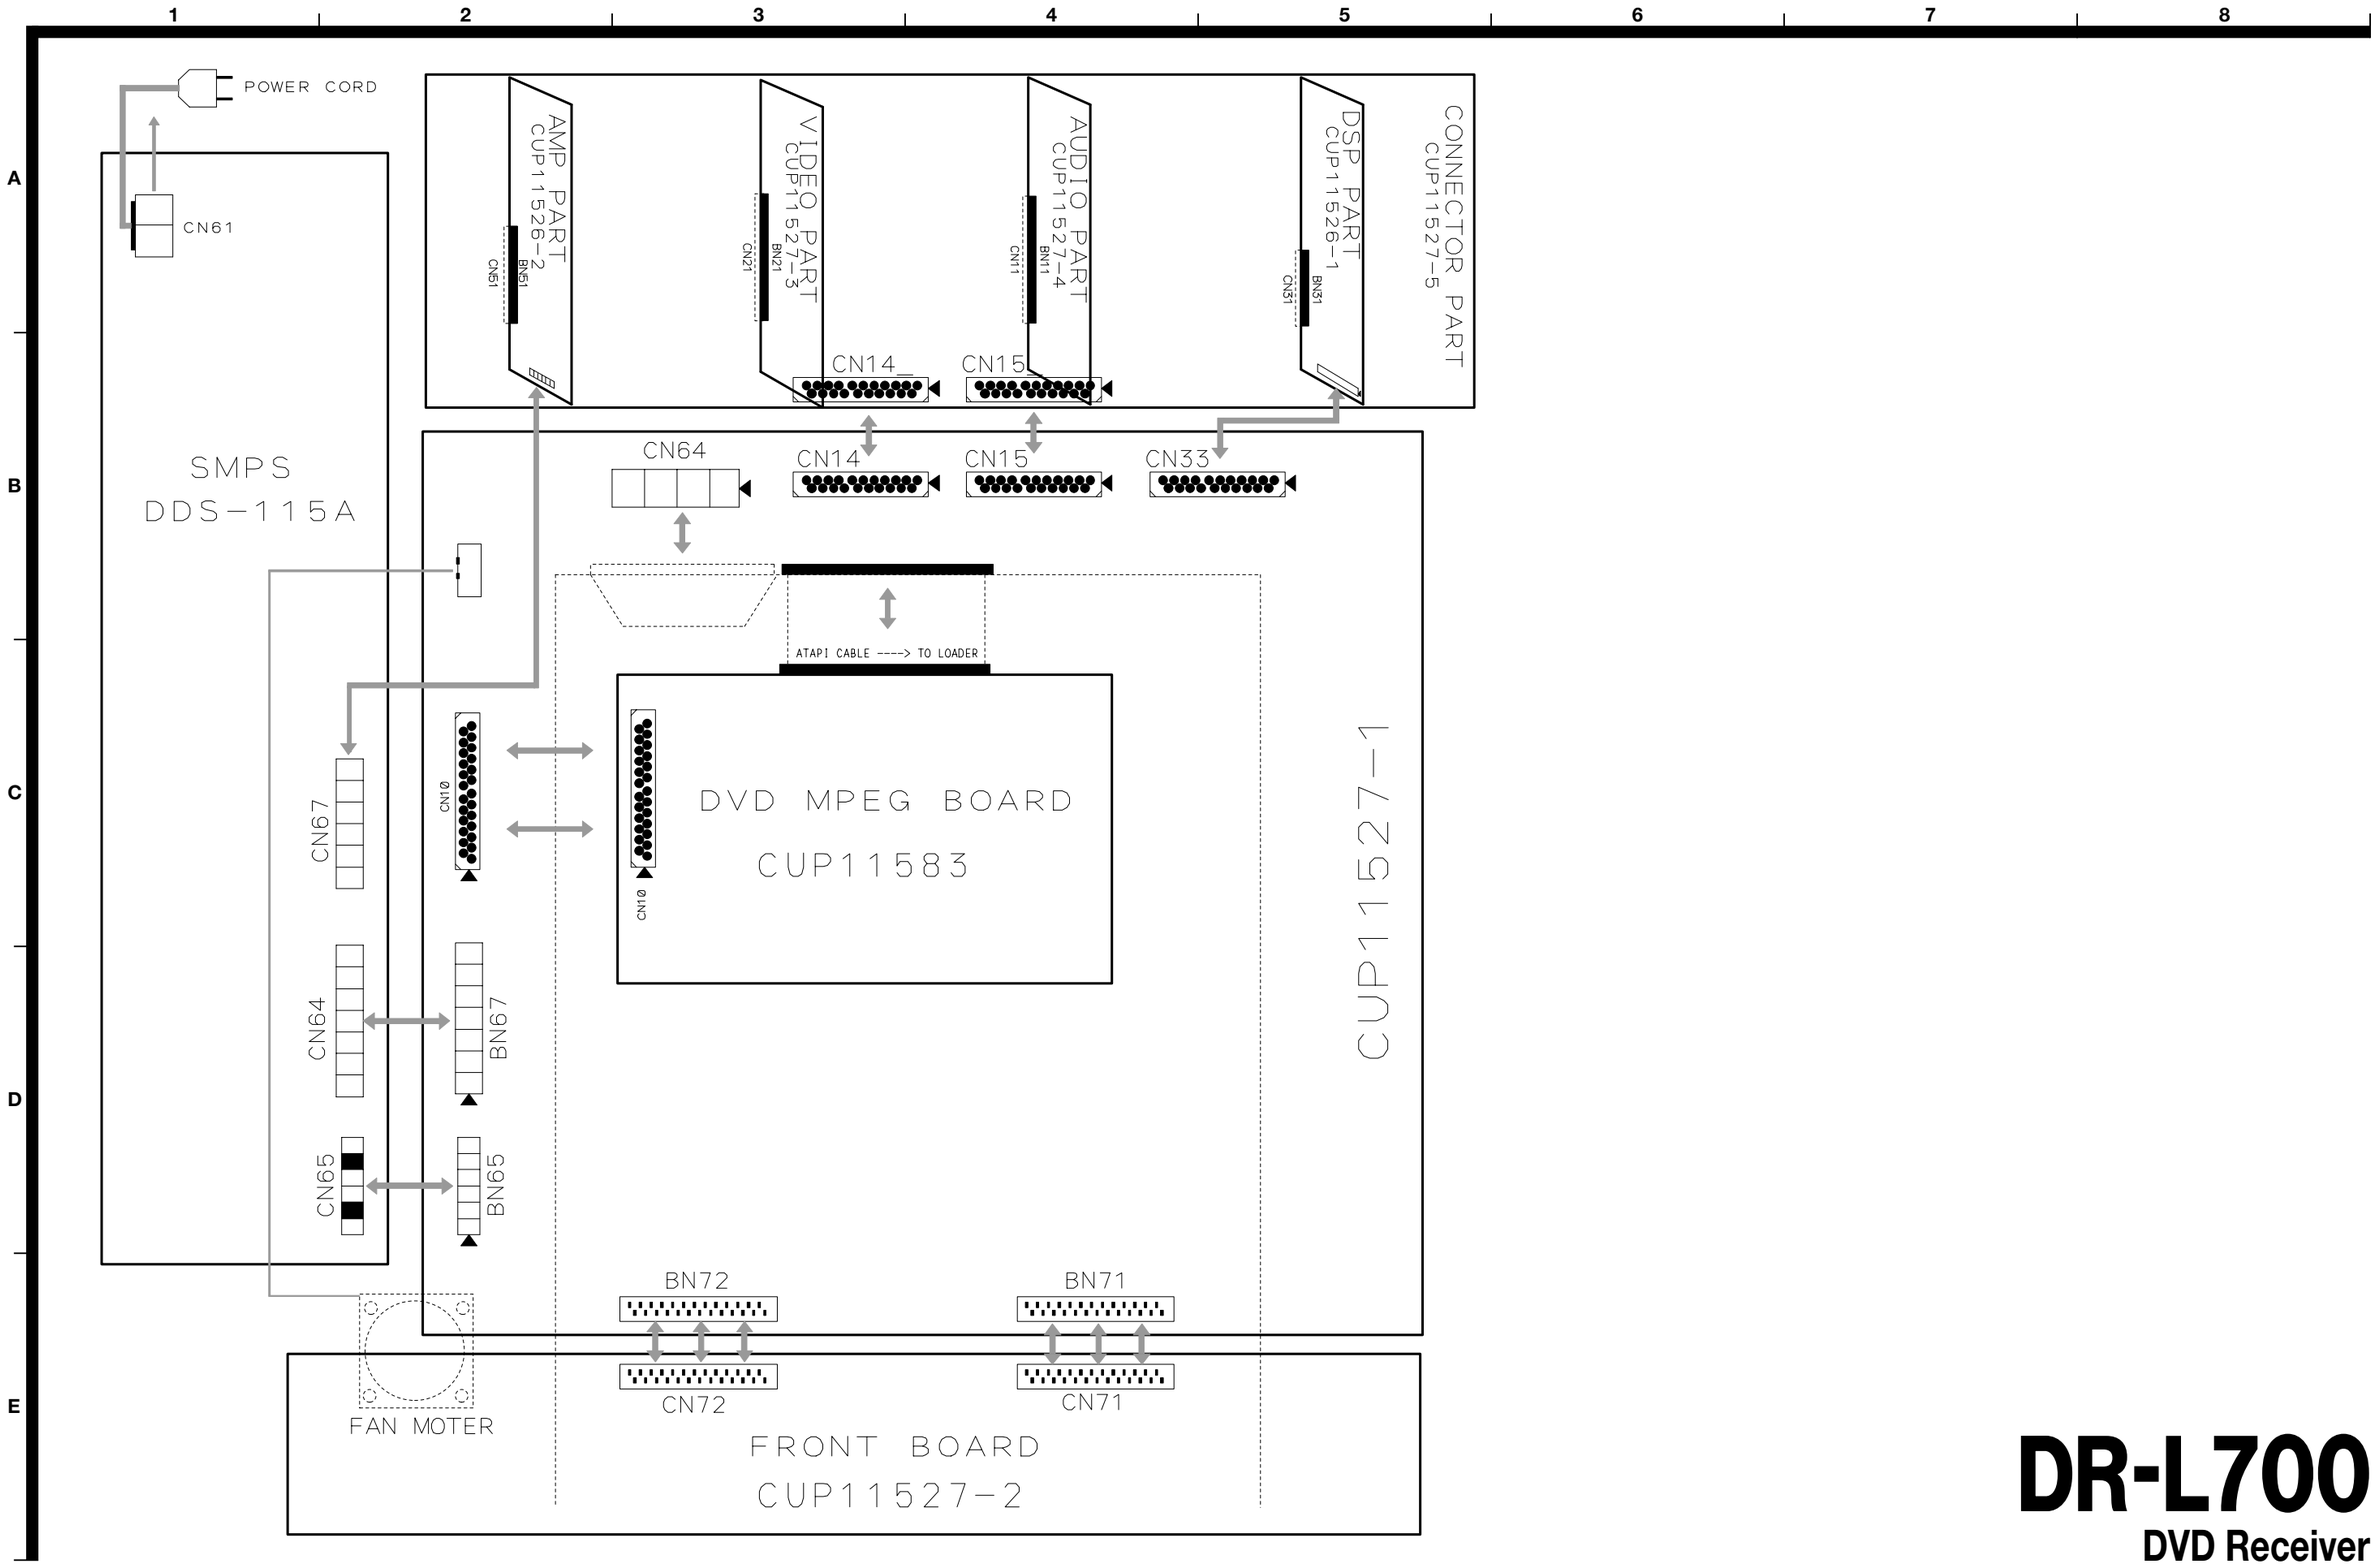

DR-L700

DVD Receiver

1 st Issue; November 2002

TEAC SCHEMATIC DIAGRAM DR-L700 VIDEO PCB, FRONT PCB, CONNECTOR PCB, AUDIO IN/OUT PCB

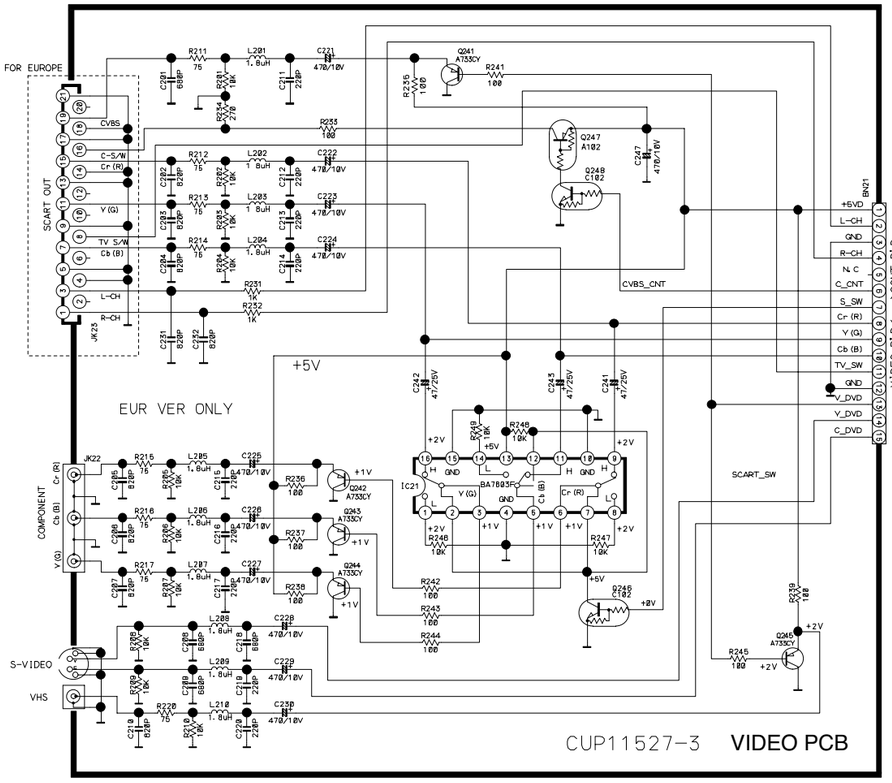

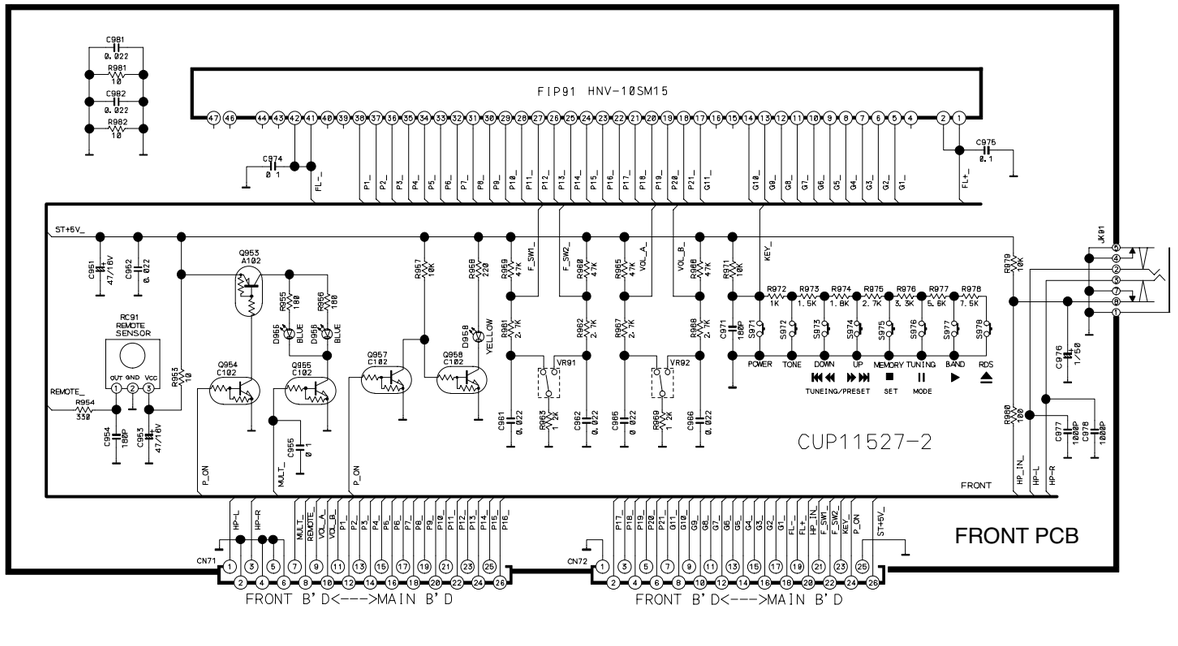

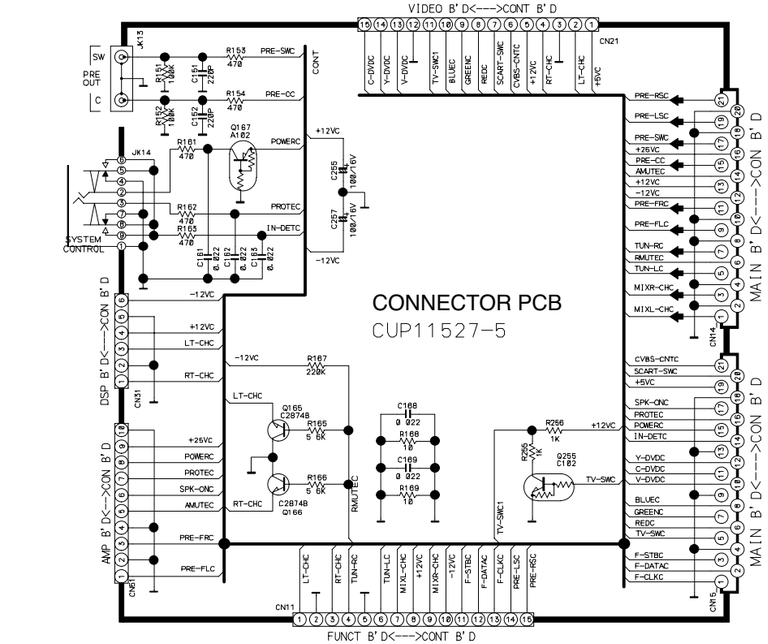

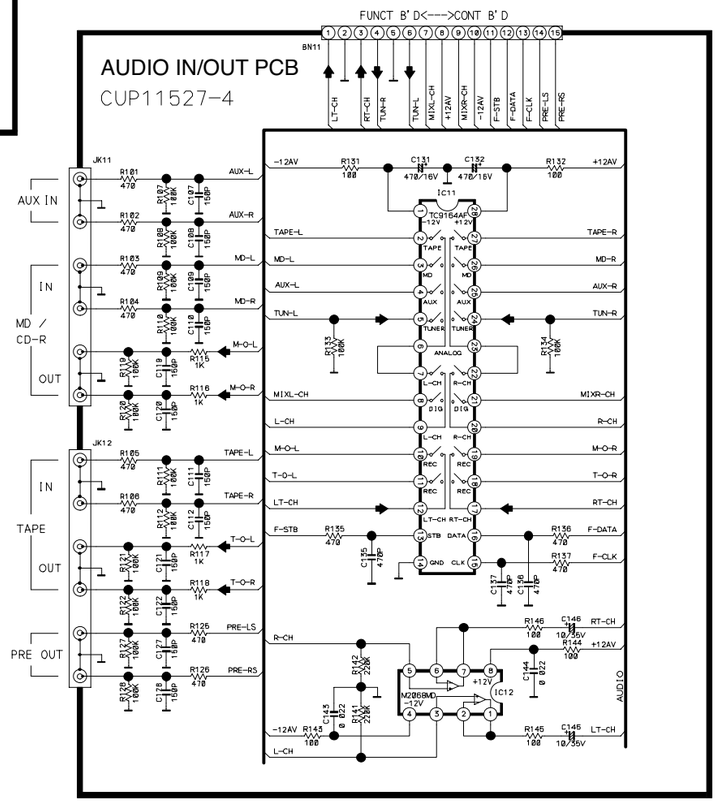

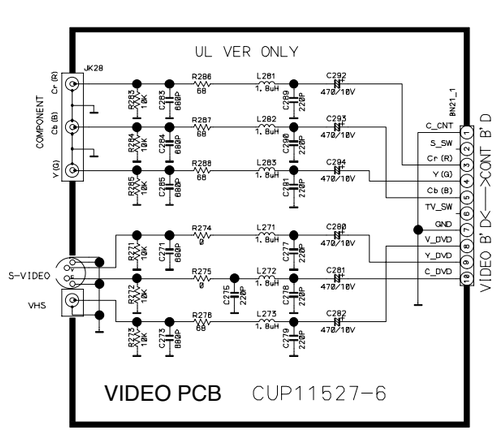

NOTES:

1. Resistor values are in ohms (k=kilo-ohms, M=megohms).
2. Capacitor values are in microfarads (p=picofarads).

DR-L700

DVD Receiver

1 st Issue; November 2002

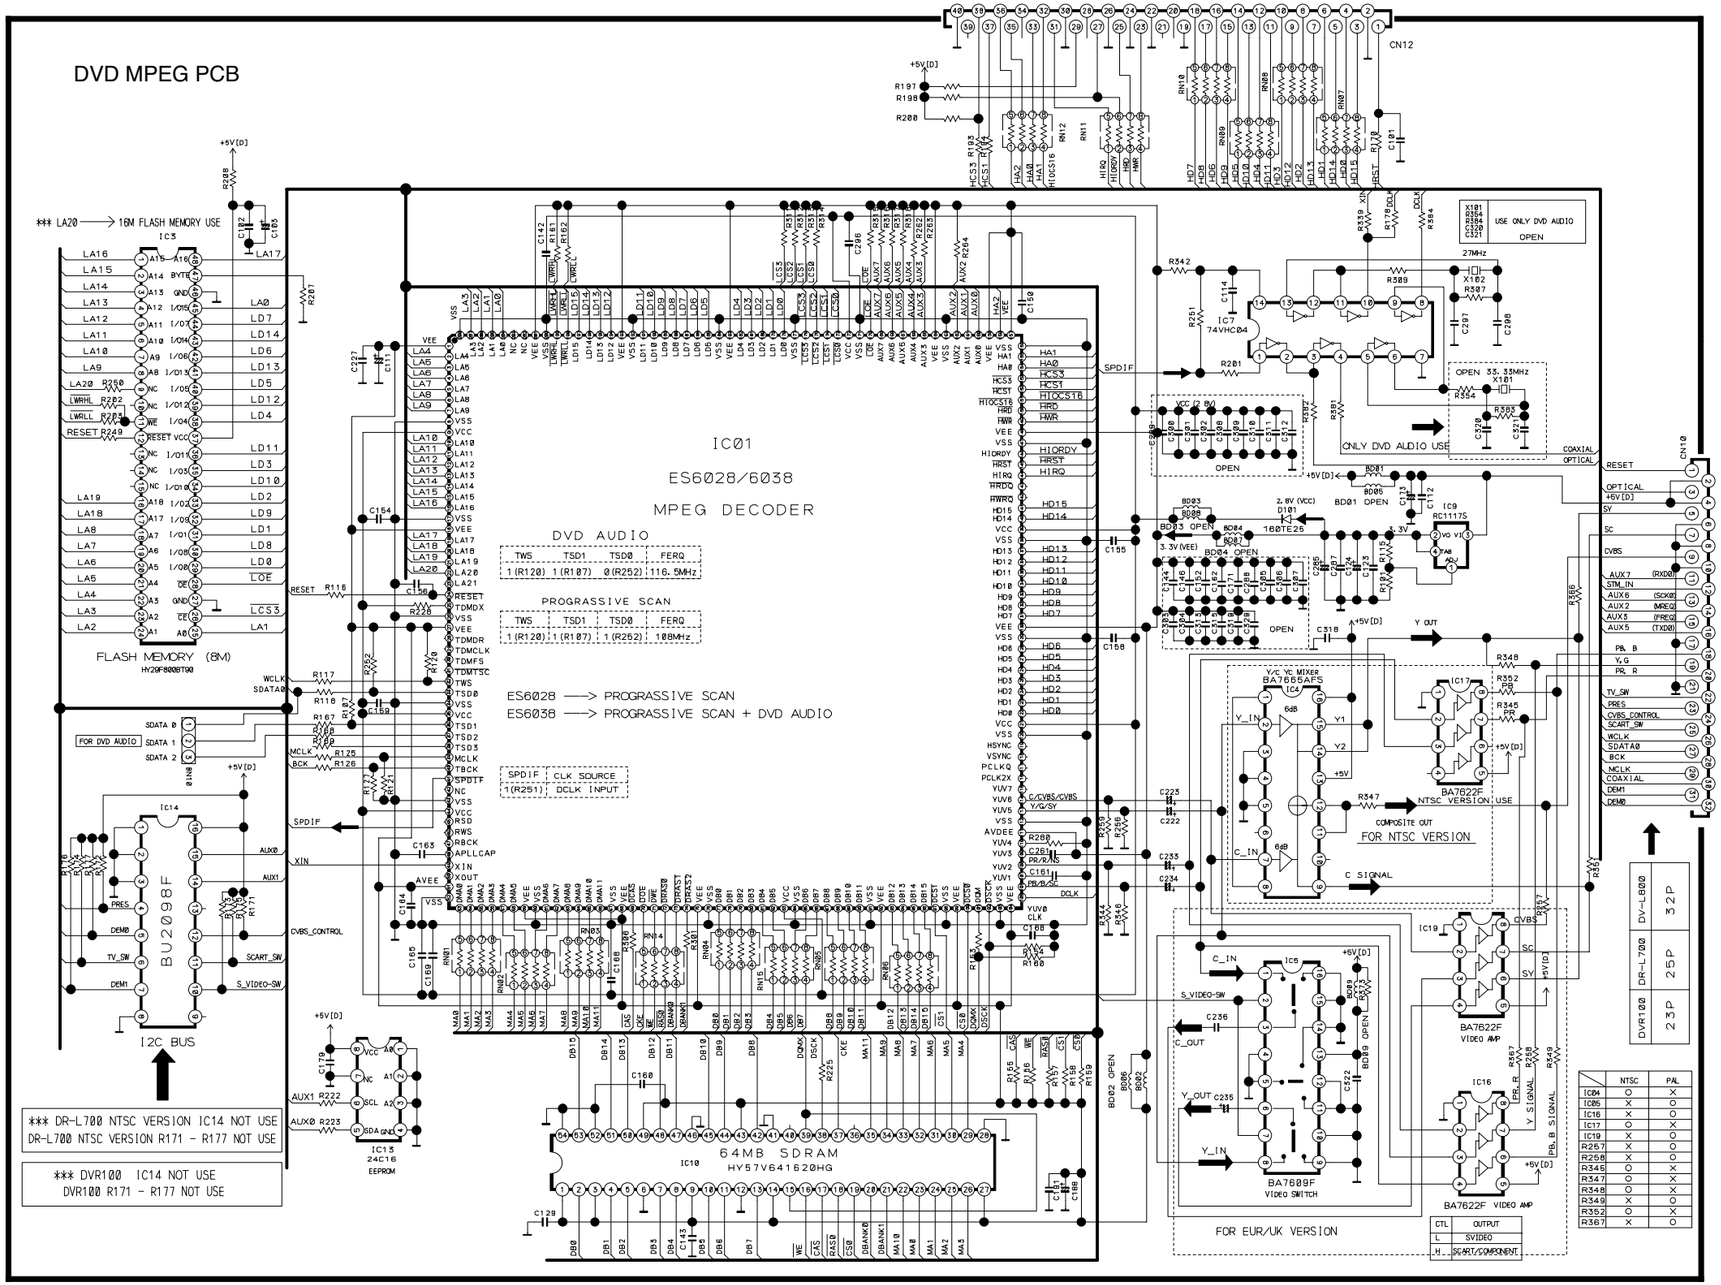

	NTSC	PAL
IC04	O	X
IC05	X	O
IC16	X	O
IC17	O	X
IC19	X	O
R257	X	O
R258	X	O
R345	O	X
R347	O	X
R348	X	O
R349	X	O
R352	O	X
R367	X	O

CTL	OUTPUT
L	SVIDEO
H	SCART/COMPONENT

R101	360	R283	NS	C165	
R102	NS	R301	33	C165	0.1
R103	NS	R306	33	C166	0.1
R104	NS	R307	100K	C168	0.1
R105	NS	R309	330	C175	0.1
R106	NS	R311	4.7K	C179	0.1
R107	4.7K	R312	4.7K	C188	100/6.3
R108	NS	R313	4.7K	C191	NS
R109	NS	R314	4.7K	C222	10/50
R110	NS	R315	4.7K	C223	10/50
R111	NS	R316	4.7K	C228	0.1
R112	NS	R317	4.7K	C233	10/50
R113	NS	R318	4.7K	C234	10/50
R114	NS	R320	NS	C235	10/50
R115	220	R321	NS	C236	0.1
R116	1K	R322	NS	C237	0.1
R117	10	R323	NS	C248	47/6.3
R118	10	R339	120	C261	0.1
R119	NS	R344	68	C285	100/6.3
R120	4.7K	R345	75	C286	NS
R121	47K	R346	68	C287	0.1
R122	NS	R347	75	C296	0.1
R123	NS	R348	75	C297	27P
R124	NS	R349	0	C298	27P
R126	10	R351	82	C316	0.1
R126	10	R352	75	C317	47/6.3
R127	47K	R354	330	C318	0.1
R153	33	R366	75	C320	NS
R154	47K	R367	0	C321	NS
R155	4.7K	R373	0	C322	0.1
R156	4.7K	R374	4.7K	C325	0.1
R157	4.7K	R375	4.7K	C524	100/6.3
R158	4.7K	R381	33	D101	180TE26
R159	4.7K	R382	33	BD01	NS
R160	47K	RN01	33*4	BD02	NS
R161	4.7K	RN02	33*4	BD03	NS
R162	4.7K	RN03	33*4	BD04	NS
R170	33	RN04	33*4	BD05	0
R171	10K	RN05	33*4	BD06	0
R172	1K	RN06	33*4	BD07	0
R173	10K	RN07	33*4	BD08	0
R174	10K	RN08	33*4	BD09	NS
R175	10K	RN09	33*4		
R176	10K	RN10	33*4		
R177	10K	RN11	33*4		
R178	120	RN12	33*4		
R193	33	RN13	33*4		
R194	33	RN15	33*4		
R197	4.7K				
R198	4.7K	C101	0.1		
R200	4.7K	C102	0.1		
R201	33	C103	47/6.3		
R203	10	C111	47/6.3		
R207	NS	C112	0.1		
R222	100	C114	0.1		
R223	100	C123	0.1		
R225	100	C124	100/6.3		
R228	4.7K	C129	0.1		
R249	1K	C130	0.1		
R251	4.7K	C143	0.1		
R252	75	C145	0.1		
R256	68	C150	0.1		
R257	0	C152	0.1		
R258	0	C155	0.1		
R259	68	C156	0.1		
R262	4.7K	C158	0.1		
R263	4.7K	C160	0.1		
R264	4.7K	C161	0.1		
R278	NS	C163	150p		
R280	270	C164	0.1		

NOTES:

1. Resistor values are in ohms (k=kilo-ohms, M=megohms).
2. Capacitor values are in microfarads (p=picofarads).

DR-L700

DVD Receiver

1 st Issue; November 2002

TEAC SCHEMATIC DIAGRAM DR-L700 MAIN PCB

MAIN PCB

CUP11527-1

2CH DOWNMIX PART

VOLUME PART

PRE OUT PART

HEADPHONE PART

MICOM PART

IC91 TMP87PS71F

PIN NO	PART NO	H (USED)	L (NOT USED)
PIN 62	D911	RDS	NO RDS
PIN 63	D912	60KHZ	100KHZ
PIN 64	D913	9KHZ	10KHZ
PIN 65	D914	JAPAN (76-90)	

NOTES:

1. Resistor values are in ohms (k=kilo-ohms, M=megohms).
2. Capacitor values are in microfarads (p=picofarads).

DR-L700

DVD Receiver

1 st Issue; November 2002

DSP PCB

CUP11526-1

DSP B'D <---> MAIN B'D

AMP PCB

CUP11526-2

IC81 TC2000	
PIN	VOLT
1	2V
15	1.2V
19	2.8V
22, 27	2.5V
24 (MUTE)	ACTIVE HIGH

NOTES:

1. Resistor values are in ohms (k=kilo-ohms, M=megohms).
2. Capacitor values are in microfarads (p=picofarads).

DR-L700

DVD Receiver

1 st Issue; November 2002

SMPS PCB [USA/CANADA]

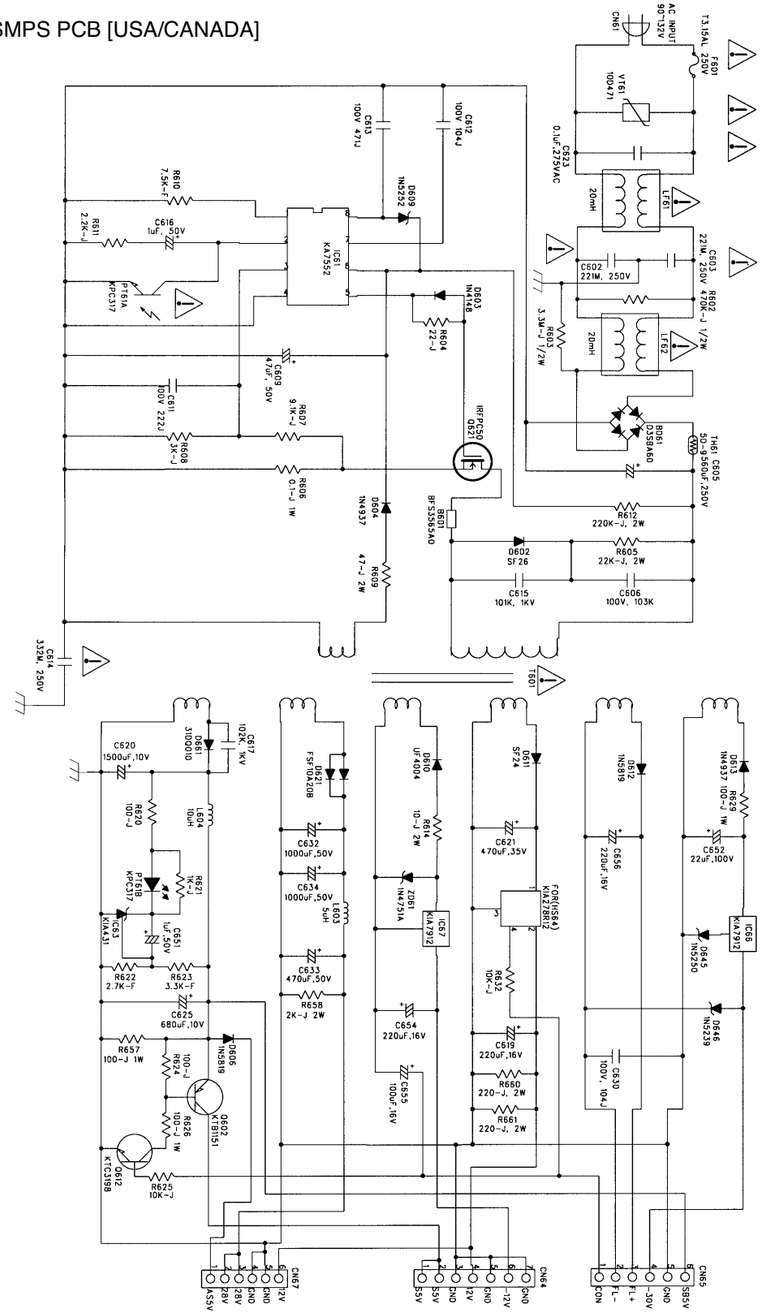

SMPS PCB [EUR/UK]

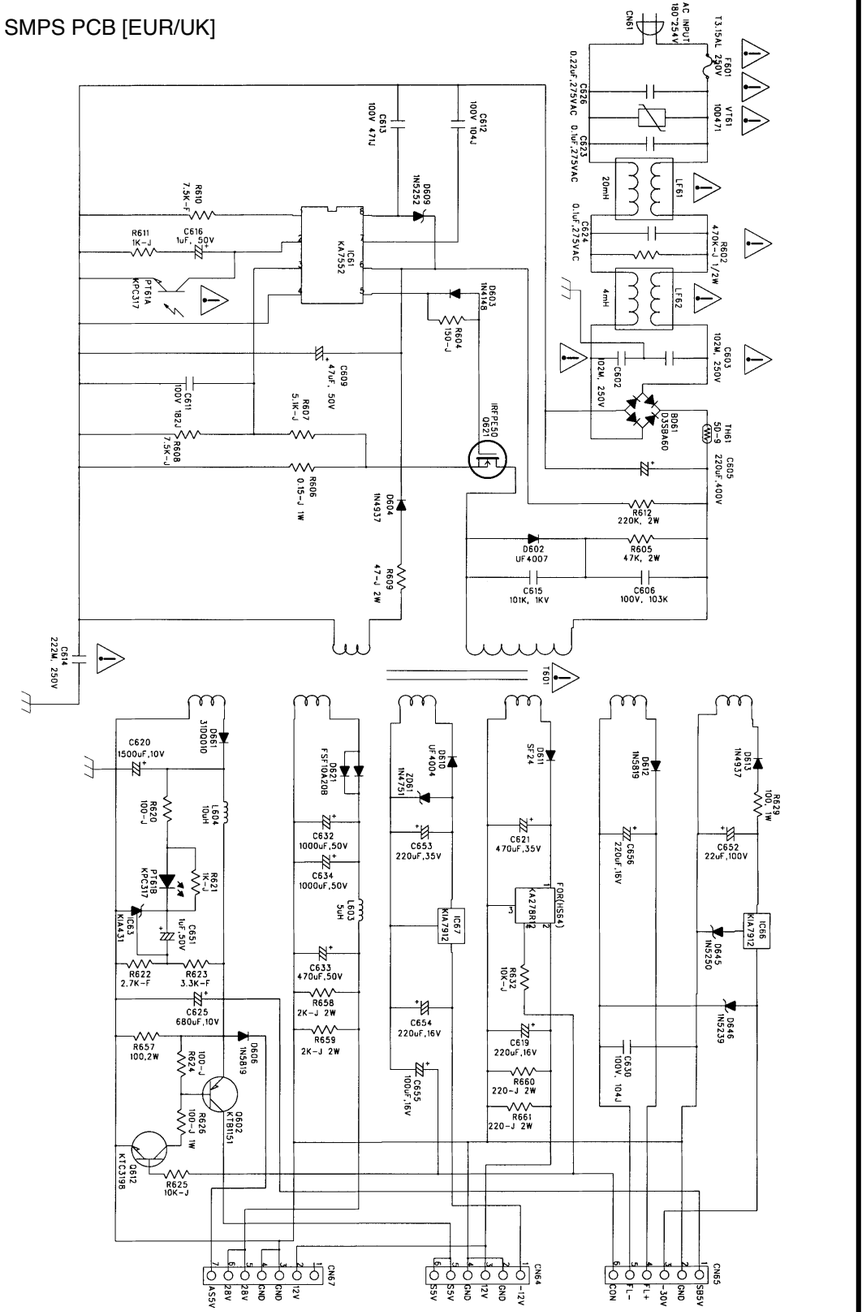

INSTRUCTIONS FOR SERVICE PERSONNEL
BEFORE RETURNING APPLIANCE TO THE CUSTOMER, MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT.

NOTES:

⚠Parts marked with this sign are safety critical components. They must always be replaced with identical components-refer to the appropriate parts list and ensure exact replacement.

DR-L700

DVD Receiver

1 st Issue; November 2002

	LEVEL	PARTS NO.	DESCRIPTION	Q'TY	REF NO.	MFR	OEM NO.
1	1	9A09577910	SET,DVD RECEIVER T/C	1		ANAM	DR-L700TCCCSET
2	·2	9A09562500	SCREW	4		ANAM	CTVD3+8JFZ
3	·2	9A09578010	FRONT PANEL ASSY T/C	1		ANAM	CGWDRL700TCCC
4	··3	9A09331900	SCREW,CTB3+10G	7		ANAM	CTB3+10G
5	··3	9A09594600	WINDOW,SENSOR	1		ANAM	CGU1A287A14K101
6	··3	9A09598500	SCREW	9		ANAM	CTS3+10J
7	··3	9A09606800	SPRING,VOLUME	1		ANAM	KUS1A132
8	··3	9A09610300	KNOB,RDS(DIFFUSION)	1		ANAM	CBT1A838RAYK101
9	··3	9A09610400	KNOB,POWER(DIFFUSION)	1		ANAM	CBT1A838RAZK101
10	··3	9A09610500	KNOB,BAND	1		ANAM	CBT1A839C22
11	··3	9A09610600	KNOB,RDS	1		ANAM	CBY1A027RA
12	··3	9A09610700	KNOB,POWER	1		ANAM	CBY1A028RA
13	··3	9A09610800	KNOB,POWER(LIGHTING)	2		ANAM	CBY1A029
14	··3	9A09611000	DOOR,DVD	1		ANAM	CGR1A276M7ZK101
15	··3	9A09611100	PANEL,MOLD	1		ANAM	CGW1A343R6K101
16	··3	9A09616300	VOLUME KNOB ASS'Y	2		ANAM	KGK1A079ZA
17	···4	9A09616100	KNOB,VOLUME(MOLD)	1		ANAM	KBN1A161
18	···4	9A09616200	KNOB,VOLUME(AL)	1		ANAM	KGK1A079C21
19	··3	9A09616400	WINDOW,FIP	1		ANAM	KGU1A288Y
20	··3	9A09616610	PANEL,FRONT(AL)	1		ANAM	KKM1A124YC35
21	·2	9A09578110	BOTTOM CHASSIS ASSY T/C	1		ANAM	CUADRL700TCCC
22	··3	9A05327300	CLAMPER KHR301	4		ANAM	KHR301
23	··3	9A06053500	TAPE,FILAMENT	1		ANAM	K4FE190
24	··3	9A06066300	COMPOUND,SILICONE	1		ANAM	K8AYG6260
25	··3	9A06229300	CUSHION,FOOT	4		ANAM	KHG1A039Z
26	··3	9A06754900	BUSHING,AC CORD	1		ANAM	KHR1A028
27	··3	9A07872600	POWER,CORD	1		ANAM	CJA523FBY
28	··3	9A08885700	RUBBER	2		ANAM	CHG1A113
29	··3	9A09330500	SCREW,CTB3+10GFZ	12		ANAM	CTB3+10GFZ
30	··3	9A09333000	SCREW,CTW3+8J	7		ANAM	CTW3+8J
31	··3	9A09338300	SCREW	14		ANAM	CTB3+6J
32	··3	9A09343900	SCREW	2		ANAM	CTW3+14J
33	··3	9A09561500	STICKER,CAUTION	1		ANAM	CQX1A294Z
34	··3	9A09562200	SCREW,DOT	1		ANAM	CTBD3+10JFC
35	··3	9A09578210	MECHANISM ASSY T/C	1		ANAM	CJDDRL700TC
36	···4	9A09578310	DVD MAIN PCB SMD ASSY T/	1		ANAM	CIP11538BSMD
37	····5	9A09256400	40P HEADER (ANGLE TYPE)	1	CN12	ANAM	KJP40GB80ZP
38	····5	9A09564800	CAP,CHIP ELECT	1	C124	ANAM	HCEC0JRV2101T
39	····5	9A09564800	CAP,CHIP ELECT	1	C173	ANAM	HCEC0JRV2101T
40	····5	9A09564800	CAP,CHIP ELECT	1	C188	ANAM	HCEC0JRV2101T
41	····5	9A09564800	CAP,CHIP ELECT	1	C285	ANAM	HCEC0JRV2101T
42	····5	9A09564800	CAP,CHIP ELECT	1	C324	ANAM	HCEC0JRV2101T
43	····5	9A09565000	CAP,CHIP ELECT C0JRV2470	2	C103, C111	ANAM	HCEC0JRV2470T
44	····5	9A09565000	CAP,CHIP ELECT C0JRV2470	2	C238, C239	ANAM	HCEC0JRV2470T
45	····5	9A09565000	CAP,CHIP ELECT C0JRV2470	1	C248	ANAM	HCEC0JRV2470T
46	····5	9A09565000	CAP,CHIP ELECT C0JRV2470	1	C317	ANAM	HCEC0JRV2470T

47	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C101, C102	ANAM	HCUS1E104ZF
48	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C112, C114	ANAM	HCUS1E104ZF
49	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C123	ANAM	HCUS1E104ZF
50	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C129, C130	ANAM	HCUS1E104ZF
51	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C143, C145	ANAM	HCUS1E104ZF
52	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C150	ANAM	HCUS1E104ZF
53	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C155, C156	ANAM	HCUS1E104ZF
54	····5	9A09565600	CAP,CHIP, 0.1UF ZF	4	C158- C161	ANAM	HCUS1E104ZF
55	····5	9A09565600	CAP,CHIP, 0.1UF ZF	4	C164- C168	ANAM	HCUS1E104ZF
56	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C179	ANAM	HCUS1E104ZF
57	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C191	ANAM	HCUS1E104ZF
58	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C227, C228	ANAM	HCUS1E104ZF
59	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C236	ANAM	HCUS1E104ZF
60	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C244	ANAM	HCUS1E104ZF
61	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C259, C261	ANAM	HCUS1E104ZF
62	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C287	ANAM	HCUS1E104ZF
63	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C316	ANAM	HCUS1E104ZF
64	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C318	ANAM	HCUS1E104ZF
65	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C322, C323	ANAM	HCUS1E104ZF
66	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	4	BD05- BD08	ANAM	HRJ10DJ0R0T
67	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R207, R208	ANAM	HRJ10DJ0R0T
68	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R253	ANAM	HRJ10DJ0R0T
69	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R257, R258	ANAM	HRJ10DJ0R0T
70	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R278	ANAM	HRJ10DJ0R0T
71	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R283	ANAM	HRJ10DJ0R0T
72	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R333	ANAM	HRJ10DJ0R0T
73	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R342	ANAM	HRJ10DJ0R0T
74	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R349	ANAM	HRJ10DJ0R0T
75	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R367, R373	ANAM	HRJ10DJ0R0T
76	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R117, R118	ANAM	HRJ10DJ100T
77	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R125, R126	ANAM	HRJ10DJ100T
78	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R203	ANAM	HRJ10DJ100T
79	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R116	ANAM	HRJ10DJ102T
80	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R172	ANAM	HRJ10DJ102T
81	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R249	ANAM	HRJ10DJ102T
82	····5	9A09567700	RES,CHIP 10DJ103T	1	R171	ANAM	HRJ10DJ103T
83	····5	9A09567700	RES,CHIP 10DJ103T	5	R173- R177	ANAM	HRJ10DJ103T
84	····5	9A09567800	RES,CHIP 10DJ104T	1	R307	ANAM	HRJ10DJ104T
85	····5	9A09568200	RES,CHIP(1/10W) 10DJ221T	1	R115	ANAM	HRJ10DJ221T
86	····5	9A09568200	RES,CHIP(1/10W) 10DJ221T	1	R280	ANAM	HRJ10DJ221T
87	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	1	R121	ANAM	HRJ10DJ473T
88	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	1	R127	ANAM	HRJ10DJ473T
89	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	4	R154- R157	ANAM	HRJ10DJ473T
90	····5	9A09569500	RES,CHIP(1/10W) 75 OHM J	2	R351, R366	ANAM	HRJ10DJ750T
91	····5	9A09578400	DVD MAIN PCB	0,5		ANAM	CUP11538Z
92	····5	9A09601300	CAP,CHIP 150PF JA	1	C163	ANAM	HCUS1H151JA
93	····5	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R222, R223	ANAM	HRJ10DJ101T
94	····5	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R225	ANAM	HRJ10DJ101T
95	····5	9A09602500	RES,CHIP (1/10W)	1	R178	ANAM	HRJ10DJ121T
96	····5	9A09602500	RES,CHIP (1/10W)	1	R339	ANAM	HRJ10DJ121T

97	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	1	R153	ANAM	HRJ10DJ330T
98	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R193, R194	ANAM	HRJ10DJ330T
99	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	1	R201	ANAM	HRJ10DJ330T
100	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R301, R306	ANAM	HRJ10DJ330T
101	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R381, R382	ANAM	HRJ10DJ330T
102	····5	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R309	ANAM	HRJ10DJ331T
103	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R107	ANAM	HRJ10DJ472T
104	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R120	ANAM	HRJ10DJ472T
105	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	5	R158- R162	ANAM	HRJ10DJ472T
106	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R170	ANAM	HRJ10DJ472T
107	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	3	R197- R200	ANAM	HRJ10DJ472T
108	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R228	ANAM	HRJ10DJ472T
109	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R251, R252	ANAM	HRJ10DJ472T
110	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	3	R262- R264	ANAM	HRJ10DJ472T
111	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	8	R311- R318	ANAM	HRJ10DJ472T
112	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R374, R375	ANAM	HRJ10DJ472T
113	····5	9A09603200	RES,CHIP 10DJ680T	1	R256	ANAM	HRJ10DJ680T
114	····5	9A09603200	RES,CHIP 10DJ680T	1	R259	ANAM	HRJ10DJ680T
115	····5	9A09603200	RES,CHIP 10DJ680T	2	R344, R346	ANAM	HRJ10DJ680T
116	····5	9A09613500	CAP,ELEC (SMD)	2	C222, C223	ANAM	HCEC1CRV2100T
117	····5	9A09613500	CAP,ELEC (SMD)	3	C233- C235	ANAM	HCEC1CRV2100T
118	····5	9A09613600	CAP,CHIP 27PF JA	2	C297, C298	ANAM	HCUS1H270JA
119	····5	9A09614200	CRYSTAL,CHIP(27MHZ,SMD)	1	X102	ANAM	HOX27000E180S
120	····5	9A09614300	RES,CHIP (1/10W)	1	R101	ANAM	HRJ10DJ361T
121	····5	9A09614500	RES,4ARRAY	12	RN01- RN12	ANAM	HRJ104DJ330T
122	····5	9A09614500	RES,4ARRAY	2	RN14, RN15	ANAM	HRJ104DJ330T
123	····5	9A09614700	DIODE,SCHOTTKEY BARRIER	1	D101	ANAM	HVDRB160L60TE25
124	····5	9A09614800	IC,VIDEO SWITCH	1	IC05	ANAM	HVIBA7609F
125	····5	9A09614900	VIDEO AMP	2	IC16, IC19	ANAM	HVIBA7622F
126	····5	9A09615000	IC,EEPROM(16K)	1	IC13	ANAM	HVIBR24C16F
127	····5	9A09615100	IC,I2C BUS	1	IC15	ANAM	HVIBU2098F
128	····5	9A09615200	DVD MPEG DECODER IC	1	IC01	ANAM	HVIES6028F
129	····5	9A09615300	IC,FLASH MEMORY	1	IC03	ANAM	HVIHY29F800BT90
130	····5	9A09615400	IC,64MSDRAM	1	IC10	ANAM	HVIHY57V641620D
131	····5	9A09615500	IC,ADJ REGULATOR	1	IC09	ANAM	HVIRC1117ST
132	····5	9A09615800	IC,INVERTER	1	IC07	ANAM	HVI74VHC04MX
133	····5	9A09616500	WAFER, CARD CABLE	1	CN10	ANAM	KJP25GA117ZG
134	···4	9A09608000	PLATE,EARTH	1		ANAM	CMC1A111
135	···4	9A09611600	INSULATOR , MECHA	1		ANAM	CMX1A137
136	···4	9A09613100	CARD CABLE (SHIELD)	1		ANAM	CWC3B2A25A150B6
137	···4	9A09613200	WIRE ASS'Y	1		ANAM	CWZDR700BN47
138	···4	9A09613300	CABLE,ATAPI(FLATE,40P)	1		ANAM	CWZHTS5000BN12
139	···4	9A09613700	1 DVD MECHANISM (HD3 P/U	1		ANAM	HJDRL-A700HD3
140	··3	9A09578510	AMP PCB ASSY	1		ANAM	COP11526B
141	···4	9A06066300	COMPOUND,SILICONE	1		ANAM	K8AYG6260
142	···4	9A07050600	BEAD,CORE	4	BD51- BD54	ANAM	KLZ9H001Z
143	···4	9A07050600	BEAD,CORE	1	BD56	ANAM	KLZ9H001Z
144	···4	9A07884200	CAP,ELECT 1000/35V	1	C564	ANAM	HCEA1VH102E
145	···4	9A07889800	CONNECTOR MOLEX35237-0	1	BN31	ANAM	KJP06GB99ZM
146	···4	9A08036700	WAFER	1	BN51	ANAM	KJP10GB99ZM

147	···4	9A08126500	MODULE,OPTICAL	1	JK33	ANAM	HJS9L001Z
148	···4	9A08789600	WAFER , CARD CABLE (21P 1	1	CN33	ANAM	KJP21GA117ZG
149	···4	9A09058500	RELAY	1	RY51	ANAM	HSL4A010ZU
150	···4	9A09330600	SCREW,CTB3+8J	2		ANAM	CTB3+8J
151	···4	9A09558800	JACK,INPUT(1PIN,GOLD PLAT	1	JK31	ANAM	CJJ4M042Z
152	···4	9A09559100	TERMINAL,SPEAKER	1	JK51	ANAM	CJJ5P012Z
153	···4	9A09559500	COIL,SPEAKER	4	L541- L544	ANAM	CLZ9Z011Z
154	···4	9A09559700	BRACKET , PCB	1	BK51	ANAM	CMD1A387
155	···4	9A09564400	WIRE ASS'Y	1	JW51	ANAM	CWE8202110RV
156	···4	9A09569900	RELAY	1	RY52	ANAM	HSL1A008ZE
157	···4	9A09570600	IC,DIGITAL AMP.	1	IC52	ANAM	HVITP2050
158	···4	9A09571700	RES,METAL OXIDE FILM	1	R598	ANAM	KRG2ANJ102H
159	···4	9A09578610	AMP PCB AUTO ASSY	1		ANAM	CIP11526B
160	····5	9A05194700	DIODE,1N4003ST	1	D355	ANAM	KVD1N4003ST
161	····5	9A05896200	R.,100-OHM,1/4W	1	R561	ANAM	KRD25FJ101T
162	····5	9A06234200	R,CARBON 25FJ151T	2	R566, R567	ANAM	KRD25FJ151T
163	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C351	ANAM	HCEA0JH102T
164	····5	9A07882300	CAP,ELECT 470/10V	1	C353	ANAM	HCEA1AH471T
165	····5	9A07882300	CAP,ELECT 470/10V	1	C533	ANAM	HCEA1AH471T
166	····5	9A07882300	CAP,ELECT 470/10V	1	C565	ANAM	HCEA1AH471T
167	····5	9A07882400	CAP,ELECT 100UF/16V	1	C335	ANAM	HCEA1CH101T
168	····5	9A07882400	CAP,ELECT 100UF/16V	2	C341, C344	ANAM	HCEA1CH101T
169	····5	9A07882400	CAP,ELECT 100UF/16V	2	C354, C355	ANAM	HCEA1CH101T
170	····5	9A07882400	CAP,ELECT 100UF/16V	1	C373	ANAM	HCEA1CH101T
171	····5	9A07883000	CAP,ELECT 47/25V	2	C312, C315	ANAM	HCEA1EH470T
172	····5	9A07883000	CAP,ELECT 47/25V	1	C337	ANAM	HCEA1EH470T
173	····5	9A07883000	CAP,ELECT 47/25V	2	C563, C568	ANAM	HCEA1EH470T
174	····5	9A07883500	CAP,ELECT 2.2UF/50V	1	C374	ANAM	HCEA1HH2R2T
175	····5	9A07883500	CAP,ELECT 2.2UF/50V	2	C503, C504	ANAM	HCEA1HH2R2T
176	····5	9A07885500	CAP,MYLAR 0.01UF/50V	1	C378	ANAM	HCQI1H103JZT
177	····5	9A07888000	TR,KSC2316YT	2	Q354, Q563	ANAM	HVTKSC2316YT
178	····5	9A07898400	DIODE,ZENER ZJ5.6BT	1	D564	ANAM	HVDMTZJ5.6BT
179	····5	9A08218800	CAP,FILM 0.1UF 63V J	8	C543- C550	ANAM	KCFE1J104JBT
180	····5	9A08878200	DIODE 1SS133T-77	2	D541, D561	ANAM	HVD1SS133MT
181	····5	9A08905600	CAP,ELECT A1VH100T	2	C303, C304	ANAM	HCEA1VH100T
182	····5	9A08905600	CAP,ELECT A1VH100T	2	C401, C402	ANAM	HCEA1VH100T
183	····5	9A08905600	CAP,ELECT A1VH100T	2	C411, C412	ANAM	HCEA1VH100T
184	····5	9A08905600	CAP,ELECT A1VH100T	2	C421, C422	ANAM	HCEA1VH100T
185	····5	9A08905600	CAP,ELECT A1VH100T	2	C431, C432	ANAM	HCEA1VH100T
186	····5	9A08905600	CAP,ELECT A1VH100T	2	C441, C442	ANAM	HCEA1VH100T
187	····5	9A08905600	CAP,ELECT A1VH100T	2	C451, C452	ANAM	HCEA1VH100T
188	····5	9A09561900	RES,CARBON 25TJ6R2T	2	R543, R544	ANAM	CRD25TJ6R2T
189	····5	9A09561900	RES,CARBON 25TJ6R2T	2	R547, R548	ANAM	CRD25TJ6R2T
190	····5	9A09570700	RES,SEMI FIXED(4.7K OHM)	2	VR51, VR52	ANAM	HVN1RA472B01T
191	····5	9A09570900	CAP,FILM(POLYESTER)	2	C551, C552	ANAM	KCFE1J474JBT
192	····5	9A09571600	RES,METAL FILM	2	R541, R542	ANAM	KRG14F2R01T
193	····5	9A09578710	AMP PCB SMD ASSY	1		ANAM	CIP11526BSMD
194	·····6	9A08163400	IC,OP AMP NJM2068MD	1	IC31	ANAM	HVINJM2068MDTE1
195	·····6	9A08163400	IC,OP AMP NJM2068MD	3	IC41- IC43	ANAM	HVINJM2068MDTE1
196	·····6	9A09565400	CAP,CHIP 1UF TANTAL	2	C536, C537	ANAM	HCSGA1V1R0B

197	9A09565500	CAP,CHIP P2A104KC	2	C531, C532	ANAM	HCUP2A104KC
198	9A09565500	CAP,CHIP P2A104KC	2	C534, C535	ANAM	HCUP2A104KC
199	9A09565600	CAP,CHIP, 0.1UF ZF	2	C307, C308	ANAM	HCUS1E104ZF
200	9A09565600	CAP,CHIP, 0.1UF ZF	1	C327	ANAM	HCUS1E104ZF
201	9A09565600	CAP,CHIP, 0.1UF ZF	1	C336	ANAM	HCUS1E104ZF
202	9A09565600	CAP,CHIP, 0.1UF ZF	3	C338- C340	ANAM	HCUS1E104ZF
203	9A09565600	CAP,CHIP, 0.1UF ZF	2	C345, C348	ANAM	HCUS1E104ZF
204	9A09565600	CAP,CHIP, 0.1UF ZF	2	C352, C356	ANAM	HCUS1E104ZF
205	9A09565600	CAP,CHIP, 0.1UF ZF	1	C359	ANAM	HCUS1E104ZF
206	9A09565600	CAP,CHIP, 0.1UF ZF	2	C372, C375	ANAM	HCUS1E104ZF
207	9A09565600	CAP,CHIP, 0.1UF ZF	1	C379	ANAM	HCUS1E104ZF
208	9A09565600	CAP,CHIP, 0.1UF ZF	2	C415, C416	ANAM	HCUS1E104ZF
209	9A09565600	CAP,CHIP, 0.1UF ZF	2	C435, C436	ANAM	HCUS1E104ZF
210	9A09565600	CAP,CHIP, 0.1UF ZF	2	C455, C456	ANAM	HCUS1E104ZF
211	9A09565600	CAP,CHIP, 0.1UF ZF	3	C505- C507	ANAM	HCUS1E104ZF
212	9A09565600	CAP,CHIP, 0.1UF ZF	6	C525- C530	ANAM	HCUS1E104ZF
213	9A09565600	CAP,CHIP, 0.1UF ZF	2	C566, C567	ANAM	HCUS1E104ZF
214	9A09565700	CAP,CHIP S1H101JA	2	C301, C302	ANAM	HCUS1H101JA
215	9A09565700	CAP,CHIP S1H101JA	1	C311	ANAM	HCUS1H101JA
216	9A09565700	CAP,CHIP S1H101JA	4	C323- C326	ANAM	HCUS1H101JA
217	9A09565700	CAP,CHIP S1H101JA	7	C328- C334	ANAM	HCUS1H101JA
218	9A09565700	CAP,CHIP S1H101JA	2	C342, C343	ANAM	HCUS1H101JA
219	9A09565700	CAP,CHIP S1H101JA	2	C357, C358	ANAM	HCUS1H101JA
220	9A09565700	CAP,CHIP S1H101JA	3	C369- C371	ANAM	HCUS1H101JA
221	9A09565800	CAP,CHIP S1H103KC	6	C553- C558	ANAM	HCUS1H103KC
222	9A09566200	CAP,CHIP S1H271JA	4	C513- C516	ANAM	HCUS1H271JA
223	9A09566300	CAP,CHIP S1H331JA	2	C541, C542	ANAM	HCUS1H331JA
224	9A09566600	CAP,CHIP S1H471JA	1	C377	ANAM	HCUS1H471JA
225	9A09566600	CAP,CHIP S1H471JA	2	C413, C414	ANAM	HCUS1H471JA
226	9A09566600	CAP,CHIP S1H471JA	1	C426	ANAM	HCUS1H471JA
227	9A09566600	CAP,CHIP S1H471JA	2	C433, C434	ANAM	HCUS1H471JA
228	9A09566600	CAP,CHIP S1H471JA	2	C453, C454	ANAM	HCUS1H471JA
229	9A09566600	CAP,CHIP S1H471JA	2	C501, C502	ANAM	HCUS1H471JA
230	9A09566800	CAP,CHIP S1H473ZF	2	C561, C562	ANAM	HCUS1H473ZF
231	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R599, R600	ANAM	HRJ10DJ0R0T
232	9A09567500	RES,CHIP(1/10W),10 OHM J	4	R312- R315	ANAM	HRJ10DJ100T
233	9A09567500	RES,CHIP(1/10W),10 OHM J	5	R323- R327	ANAM	HRJ10DJ100T
234	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R336, R340	ANAM	HRJ10DJ100T
235	9A09567500	RES,CHIP(1/10W),10 OHM J	3	R344- R346	ANAM	HRJ10DJ100T
236	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R348	ANAM	HRJ10DJ100T
237	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R373, R374	ANAM	HRJ10DJ100T
238	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R382	ANAM	HRJ10DJ100T
239	9A09567600	RES,CHIP(1/10W),1K OHM J	2	R367, R368	ANAM	HRJ10DJ102T
240	9A09567700	RES,CHIP 10DJ103T	2	R301, R302	ANAM	HRJ10DJ103T
241	9A09567700	RES,CHIP 10DJ103T	8	R359- R366	ANAM	HRJ10DJ103T
242	9A09567700	RES,CHIP 10DJ103T	1	R372	ANAM	HRJ10DJ103T
243	9A09567700	RES,CHIP 10DJ103T	1	R377	ANAM	HRJ10DJ103T
244	9A09567700	RES,CHIP 10DJ103T	2	R407, R408	ANAM	HRJ10DJ103T
245	9A09567700	RES,CHIP 10DJ103T	2	R427, R428	ANAM	HRJ10DJ103T
246	9A09567700	RES,CHIP 10DJ103T	2	R447, R448	ANAM	HRJ10DJ103T

247	9A09567700	RES,CHIP 10DJ103T	2	R509, R510	ANAM	HRJ10DJ103T
248	9A09567700	RES,CHIP 10DJ103T	2	R527, R528	ANAM	HRJ10DJ103T
249	9A09567700	RES,CHIP 10DJ103T	1	R530	ANAM	HRJ10DJ103T
250	9A09567900	RES,CHIP 10DJ113T	1	R522	ANAM	HRJ10DJ113T
251	9A09568000	RES,CHIP 10DJ153T	4	R517- R520	ANAM	HRJ10DJ153T
252	9A09568100	RES,CHIP 10DJ183T	1	R341	ANAM	HRJ10DJ183T
253	9A09568300	RES,CHIP 10DJ222T	2	R405, R406	ANAM	HRJ10DJ222T
254	9A09568300	RES,CHIP 10DJ222T	3	R424- R426	ANAM	HRJ10DJ222T
255	9A09568300	RES,CHIP 10DJ222T	2	R445, R446	ANAM	HRJ10DJ222T
256	9A09568300	RES,CHIP 10DJ222T	2	R525, R526	ANAM	HRJ10DJ222T
257	9A09568400	RES,CHIP 10DJ223T	1	R524	ANAM	HRJ10DJ223T
258	9A09568600	RES,CHIP 10DJ332T	2	R354, R355	ANAM	HRJ10DJ332T
259	9A09568700	RES,CHIP 10DJ333T	2	R376, R378	ANAM	HRJ10DJ333T
260	9A09568900	RES,CHIP 10DJ471T	2	R305, R306	ANAM	HRJ10DJ471T
261	9A09568900	RES,CHIP 10DJ471T	3	R329- R331	ANAM	HRJ10DJ471T
262	9A09568900	RES,CHIP 10DJ471T	1	R343	ANAM	HRJ10DJ471T
263	9A09568900	RES,CHIP 10DJ471T	2	R357, R358	ANAM	HRJ10DJ471T
264	9A09568900	RES,CHIP 10DJ471T	1	R379	ANAM	HRJ10DJ471T
265	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R401, R402	ANAM	HRJ10DJ473T
266	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R413, R414	ANAM	HRJ10DJ473T
267	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R421, R422	ANAM	HRJ10DJ473T
268	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R433, R434	ANAM	HRJ10DJ473T
269	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R441, R442	ANAM	HRJ10DJ473T
270	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R453, R454	ANAM	HRJ10DJ473T
271	9A09569100	RES,CHIP 10DJ474T	4	R505- R508	ANAM	HRJ10DJ474T
272	9A09569600	RES,CHIP 10DJ822T	1	R521	ANAM	HRJ10DJ822T
273	9A09570400	IC,GENERATOR	1	IC51	ANAM	HVITC2000
274	9A09578800	PCB,AMP & DSP	0,5		ANAM	CUP11526Y
275	9A09601400	CAP,CHIP S1H221JA	2	C405, C406	ANAM	HCUS1H221JA
276	9A09601400	CAP,CHIP S1H221JA	1	C425	ANAM	HCUS1H221JA
277	9A09601400	CAP,CHIP S1H221JA	2	C445, C446	ANAM	HCUS1H221JA
278	9A09601500	CAP,CHIP S1H222KC	2	C305, C306	ANAM	HCUS1H222KC
279	9A09601500	CAP,CHIP S1H222KC	1	C349	ANAM	HCUS1H222KC
280	9A09601500	CAP,CHIP S1H222KC	2	C403, C404	ANAM	HCUS1H222KC
281	9A09601500	CAP,CHIP S1H222KC	2	C423, C424	ANAM	HCUS1H222KC
282	9A09601500	CAP,CHIP S1H222KC	2	C443, C444	ANAM	HCUS1H222KC
283	9A09601600	CAP,CHIP S1H330JA	2	C313, C314	ANAM	HCUS1H330JA
284	9A09601600	CAP,CHIP S1H330JA	2	C321, C322	ANAM	HCUS1H330JA
285	9A09602000	BEAD,FERRITE(CHIP)	2	L332, L344	ANAM	HLZ9J003Z
286	9A09602000	BEAD,FERRITE(CHIP)	2	L501, L502	ANAM	HLZ9J003Z
287	9A09602000	BEAD,FERRITE(CHIP)	1	L545	ANAM	HLZ9J003Z
288	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R307, R308	ANAM	HRJ10DJ101T
289	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R311	ANAM	HRJ10DJ101T
290	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R328	ANAM	HRJ10DJ101T
291	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R342	ANAM	HRJ10DJ101T
292	9A09602300	RES,CHIP (1/10W)100 OHM J	3	R369- R371	ANAM	HRJ10DJ101T
293	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R409, R410	ANAM	HRJ10DJ101T
294	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R415, R416	ANAM	HRJ10DJ101T
295	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R429, R430	ANAM	HRJ10DJ101T
296	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R435, R436	ANAM	HRJ10DJ101T

297	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R449, R450	ANAM	HRJ10DJ101T
298	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R455, R456	ANAM	HRJ10DJ101T
299	·····6	9A09602400	RES,CHIP (1/10W)	1	R321	ANAM	HRJ10DJ105T
300	·····6	9A09602600	RES,CHIP 10DJ123T	2	R303, R304	ANAM	HRJ10DJ123T
301	·····6	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R353	ANAM	HRJ10DJ331T
302	·····6	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R375	ANAM	HRJ10DJ331T
303	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R380, R381	ANAM	HRJ10DJ472T
304	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R403, R404	ANAM	HRJ10DJ472T
305	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R423	ANAM	HRJ10DJ472T
306	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R443, R444	ANAM	HRJ10DJ472T
307	·····6	9A09603700	IC,DIR+CODEC	1	IC32	ANAM	HVIAK4586VQ
308	·····6	9A09603900	IC,DSP	1	IC35	ANAM	HVICS493264-CL
309	·····6	9A09604800	TR,CHIP KRA102S	1	Q503	ANAM	HVTKRA102S
310	·····6	9A09605000	TR,CHIP KRC102S	2	Q501, Q502	ANAM	HVTKRC102S
311	·····6	9A09605000	TR,CHIP KRC102S	2	Q505, Q506	ANAM	HVTKRC102S
312	·····6	9A09605000	TR,CHIP KRC102S	1	Q561	ANAM	HVTKRC102S
313	·····6	9A09609500	RES,CHIP 10DJ122T	4	R513- R516	ANAM	HRJ10DJ122T
314	·····6	9A09609600	RES,CHIP 10DJ203T	2	R503, R504	ANAM	HRJ10DJ203T
315	·····6	9A09609600	RES,CHIP 10DJ203T	2	R511, R512	ANAM	HRJ10DJ203T
316	·····6	9A09614000	COIL,CHIP(22UH,K)	2	L311, L331	ANAM	HLZ9M011Z
317	·····6	9A09614000	COIL,CHIP(22UH,K)	1	L333	ANAM	HLZ9M011Z
318	·····6	9A09614000	COIL,CHIP(22UH,K)	3	L351- L353	ANAM	HLZ9M011Z
319	·····6	9A09614000	COIL,CHIP(22UH,K)	2	L566, L567	ANAM	HLZ9M011Z
320	·····6	9A09614400	RES,CHIP (1/10W)	1	R564	ANAM	HRJ10DJ470T
321	·····6	9A09614700	DIODE,SCHOTTKEY BARRIEF	2	D562, D563	ANAM	HVDRB160L60TE25
322	·····6	9A09614700	DIODE,SCHOTTKEY BARRIEF	1	D565	ANAM	HVDRB160L60TE25
323	·····6	9A09615700	IC,AND GATE(QUAD/2IN L/V)	1	IC34	ANAM	HVI74LCX08MX
324	····5	9A09603500	DIODE,ZENER	1	D354	ANAM	HVDMTZJ4.3CT
325	····5	9A09612500	RES , CARBON	1	R565	ANAM	CRD25TJ562T
326	····5	9A09614100	CRYSTAL(HC-49/S,ATS)	1	X321	ANAM	HOX12288E220TF
327	···4	9A09608200	PLATE , HEAT SINK	1		ANAM	CMY1A200
328	···4	9A09612800	WIRE ASS'Y	1	BN52	ANAM	CWB1E906150BM
329	···4	9A09613800	MODULE , OPTICAL(RECEIVE	1	JK32	ANAM	HJSTORX179
330	··3	9A09578910	MAIN PCB ASSY T/C	1		ANAM	COP11527C
331	···4	9A05329300	WAFER MOLEX 5267-04A	1	CN64	ANAM	KJP04GA01ZM
332	···4	9A06230200	JACK , REMOTE(2P)	1	JK13	ANAM	KJJ4N023Z
333	···4	9A06861800	JACK,HEADPHONE	1	JK14	ANAM	BJJ2E021Z
334	···4	9A07889700	WAFER MOLEX35336-0610	1	CN31	ANAM	KJP06GA98ZM
335	···4	9A08036600	WAFER,MOLEX35336-1010	1	CN21	ANAM	KJP10GA98ZM
336	···4	9A08036600	WAFER,MOLEX35336-1010	1	CN51	ANAM	KJP10GA98ZM
337	···4	9A08036700	WAFER	1	BN21	ANAM	KJP10GB99ZM
338	···4	9A08126400	JACK,HEADPHONE(SILVER)	1	JK91	ANAM	HJJ2D003Y
339	···4	9A08163400	IC,OP AMP NJM2068MD	1	IC12	ANAM	HVINJM2068MDTE1
340	···4	9A08163400	IC,OP AMP NJM2068MD	2	IC71, IC72	ANAM	HVINJM2068MDTE1
341	···4	9A08163400	IC,OP AMP NJM2068MD	3	IC75- IC77	ANAM	HVINJM2068MDTE1
342	···4	9A08163500	IC,NJM4556AL	1	IC78	ANAM	HVINJM4556AL
343	···4	9A08219500	WAFER	1	CN65	ANAM	KJP02GA68ZG
344	···4	9A08563600	SENSOR,REMOCON	1	RC91	ANAM	KRVHIM602H32
345	···4	9A08789600	WAFER , CARD CABLE (21P 1	4	CN14, CN15	ANAM	KJP21GA117ZG
346	···4	9A08789600	WAFER , CARD CABLE (21P 1	1	CN33	ANAM	KJP21GA117ZG

347	···4	9A08877300	BRACKET,FLT	2	BK91, BK92	ANAM	CMD1A374
348	···4	9A08879000	CRYSTAL	1	X901	ANAM	HOX08000E160C
349	···4	9A09035100	RES,CARBON	1	R848	ANAM	CRD25TJ270T
350	···4	9A09256100	JACK,IN/OUT	1	JK28	ANAM	KJJ4S014Z
351	···4	9A09275000	CAP,GOLD	1	C906	ANAM	BCES0HD104
352	···4	9A09278800	JACK,(S-VIDEO+VHS)	1	JK27	ANAM	KJJ9N003Z
353	···4	9A09279500	WAFER, CARD CABLE	1	CN13	ANAM	KJP13GA115ZG
354	···4	9A09285700	FLEXIBLE CONNECTOR(PLUG	2	CN71, CN72	ANAM	BJP26GA133ZK
355	···4	9A09285800	FLEXIBLE CONNECTOR(SOCI	2	BN71, BN72	ANAM	BJP26GB132ZK
356	···4	9A09339900	ENCODER	1	VR91	ANAM	HSR2A015Z
357	···4	9A09340400	IC,FUNCTION	1	IC11	ANAM	HVITC9164AF
358	···4	9A09556200	IC,HVIANAM1351DAT (PRGMI	1	IC91	ANAM	HVIANAM1351DAT
359	···4	9A09559000	JACK,BOARD CJJ4R020Z	2	JK11, JK12	ANAM	CJJ4R020Z
360	···4	9A09563300	BLUE L.E.D	2	D955, D956	ANAM	CVDLEBBL33T0
361	···4	9A09563500	WIRE ASS'Y	1	BN65	ANAM	CWB1C906050EN
362	···4	9A09563700	WIRE ASS'Y	1	BN67	ANAM	CWB1D007070BM
363	···4	9A09571000	F.I.P	1	FIP1	ANAM	KFLHNA11SM28
364	···4	9A09579010	MAIN PCB AUTO ASSY T/C	1		ANAM	CIP11527C
365	····5	9A03745000	TR,KSC2785-YTA	1	Q841	ANAM	KVTKSC2785YT
366	····5	9A05194600	DIODE,1N4003SRT	2	D901, D902	ANAM	KVD1N4003SRT
367	····5	9A07874500	RES,CARBON 10 OHM 1/5W	2	R168, R169	ANAM	CRD20TJ100T
368	····5	9A07874500	RES,CARBON 10 OHM 1/5W	1	R906	ANAM	CRD20TJ100T
369	····5	9A07874500	RES,CARBON 10 OHM 1/5W	1	R953	ANAM	CRD20TJ100T
370	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R131, R132	ANAM	CRD20TJ101T
371	····5	9A07874600	RES,CARBON 100 OHM 1/5W	4	R143- R146	ANAM	CRD20TJ101T
372	····5	9A07874600	RES,CARBON 100 OHM 1/5W	4	R721- R724	ANAM	CRD20TJ101T
373	····5	9A07874600	RES,CARBON 100 OHM 1/5W	1	R728	ANAM	CRD20TJ101T
374	····5	9A07874600	RES,CARBON 100 OHM 1/5W	3	R747- R749	ANAM	CRD20TJ101T
375	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R767, R768	ANAM	CRD20TJ101T
376	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R783, R784	ANAM	CRD20TJ101T
377	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R803, R804	ANAM	CRD20TJ101T
378	····5	9A07874600	RES,CARBON 100 OHM 1/5W	1	R980	ANAM	CRD20TJ101T
379	····5	9A07874700	RES,CARBON 1K OHM 1/5W	4	R115- R118	ANAM	CRD20TJ102T
380	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R715, R716	ANAM	CRD20TJ102T
381	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R746	ANAM	CRD20TJ102T
382	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R761, R762	ANAM	CRD20TJ102T
383	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R777, R778	ANAM	CRD20TJ102T
384	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R797, R798	ANAM	CRD20TJ102T
385	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R858, R859	ANAM	CRD20TJ102T
386	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R907	ANAM	CRD20TJ102T
387	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R920, R922	ANAM	CRD20TJ102T
388	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R925	ANAM	CRD20TJ102T
389	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R940, R941	ANAM	CRD20TJ102T
390	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R972	ANAM	CRD20TJ102T
391	····5	9A07874800	RES,CARBON 10K OHM 1/5W	3	R271- R273	ANAM	CRD20TJ103T
392	····5	9A07874800	RES,CARBON 10K OHM 1/5W	3	R283- R285	ANAM	CRD20TJ103T
393	····5	9A07874800	RES,CARBON 10K OHM 1/5W	2	R705, R706	ANAM	CRD20TJ103T
394	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R923	ANAM	CRD20TJ103T
395	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R939	ANAM	CRD20TJ103T
396	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R957	ANAM	CRD20TJ103T

397	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R971	ANAM	CRD20TJ103T
398	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R979	ANAM	CRD20TJ103T
399	····5	9A07874900	RES,CARBON 100K OHM 1/5W	6	R107- R112	ANAM	CRD20TJ104T
400	····5	9A07874900	RES,CARBON 100K OHM 1/5W	4	R119- R122	ANAM	CRD20TJ104T
401	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R127, R128	ANAM	CRD20TJ104T
402	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R133, R134	ANAM	CRD20TJ104T
403	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R151, R152	ANAM	CRD20TJ104T
404	····5	9A07874900	RES,CARBON 100K OHM 1/5W	1	R757	ANAM	CRD20TJ104T
405	····5	9A07875100	RES,CARBON 1.2K OHM 1/5W	1	R963	ANAM	CRD20TJ122T
406	····5	9A07875100	RES,CARBON 1.2K OHM 1/5W	1	R969	ANAM	CRD20TJ122T
407	····5	9A07875200	RES,CARBON 12K OHM	2	R835, R837	ANAM	CRD20TJ123T
408	····5	9A07875200	RES,CARBON 12K OHM	1	R927	ANAM	CRD20TJ123T
409	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R846	ANAM	CRD20TJ152T
410	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R910	ANAM	CRD20TJ152T
411	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R973	ANAM	CRD20TJ152T
412	····5	9A07875500	RES,CARBON 180 OHM 1/5W	2	R955, R956	ANAM	CRD20TJ181T
413	····5	9A07875600	RES,CARBON 1.8K OHM 1/5W	1	R974	ANAM	CRD20TJ182T
414	····5	9A07875700	RES,CARBON 18K OHM 1/5W	2	R759, R760	ANAM	CRD20TJ183T
415	····5	9A07875800	RES,CARBON 2.2K OHM 1/5W	2	R811, R812	ANAM	CRD20TJ222T
416	····5	9A07875800	RES,CARBON 2.2K OHM 1/5W	1	R841	ANAM	CRD20TJ222T
417	····5	9A07875900	RES,CARBON 22K OHM 1/5W	1	R775	ANAM	CRD20TJ223T
418	····5	9A07875900	RES,CARBON 22K OHM 1/5W	2	R795, R796	ANAM	CRD20TJ223T
419	····5	9A07875900	RES,CARBON 22K OHM 1/5W	2	R908, R909	ANAM	CRD20TJ223T
420	····5	9A07875900	RES,CARBON 22K OHM 1/5W	1	R911	ANAM	CRD20TJ223T
421	····5	9A07876000	RES,CARBON 220K OHM 1/5W	2	R141, R142	ANAM	CRD20TJ224T
422	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R167	ANAM	CRD20TJ224T
423	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R769	ANAM	CRD20TJ224T
424	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R785	ANAM	CRD20TJ224T
425	····5	9A07876200	RES,CARBON 2.7K OHM	2	R755, R756	ANAM	CRD20TJ272T
426	····5	9A07876200	RES,CARBON 2.7K OHM	2	R961, R962	ANAM	CRD20TJ272T
427	····5	9A07876200	RES,CARBON 2.7K OHM	2	R967, R968	ANAM	CRD20TJ272T
428	····5	9A07876200	RES,CARBON 2.7K OHM	1	R975	ANAM	CRD20TJ272T
429	····5	9A07876400	RES,CARBON 3.3K OHM 1/5W	1	R976	ANAM	CRD20TJ332T
430	····5	9A07876800	RES,CARBON 39K OHM 1/5W	1	R776	ANAM	CRD20TJ393T
431	····5	9A07876900	RES,CARBON 470 OHM 1/5W	6	R101- R106	ANAM	CRD20TJ471T
432	····5	9A07876900	RES,CARBON 470 OHM 1/5W	2	R125, R126	ANAM	CRD20TJ471T
433	····5	9A07876900	RES,CARBON 470 OHM 1/5W	3	R135- R137	ANAM	CRD20TJ471T
434	····5	9A07876900	RES,CARBON 470 OHM 1/5W	2	R153, R154	ANAM	CRD20TJ471T
435	····5	9A07876900	RES,CARBON 470 OHM 1/5W	3	R161- R163	ANAM	CRD20TJ471T
436	····5	9A07876900	RES,CARBON 470 OHM 1/5W	1	R843	ANAM	CRD20TJ471T
437	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R701, R702	ANAM	CRD20TJ472T
438	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R753, R754	ANAM	CRD20TJ472T
439	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R773, R774	ANAM	CRD20TJ472T
440	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R793, R794	ANAM	CRD20TJ472T
441	····5	9A07877100	RES,CARBON 47K OHM 1/5W	1	R712	ANAM	CRD20TJ473T
442	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R717, R718	ANAM	CRD20TJ473T
443	····5	9A07877100	RES,CARBON 47K OHM 1/5W	1	R727	ANAM	CRD20TJ473T
444	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R751, R752	ANAM	CRD20TJ473T
445	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R763, R764	ANAM	CRD20TJ473T
446	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R771, R772	ANAM	CRD20TJ473T

447	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R779, R780	ANAM	CRD20TJ473T
448	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R791, R792	ANAM	CRD20TJ473T
449	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R799, R800	ANAM	CRD20TJ473T
450	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R842, R845	ANAM	CRD20TJ473T
451	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R924, R926	ANAM	CRD20TJ473T
452	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R959, R960	ANAM	CRD20TJ473T
453	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R965, R966	ANAM	CRD20TJ473T
454	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R165, R166	ANAM	CRD20TJ562T
455	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R725, R726	ANAM	CRD20TJ562T
456	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R765, R766	ANAM	CRD20TJ562T
457	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R781, R782	ANAM	CRD20TJ562T
458	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R801, R802	ANAM	CRD20TJ562T
459	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R918, R919	ANAM	CRD20TJ562T
460	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	1	R921	ANAM	CRD20TJ562T
461	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	8	R931- R938	ANAM	CRD20TJ562T
462	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	1	R977	ANAM	CRD20TJ562T
463	····5	9A07877800	RES,CARBON 7.5K OHM ,	1	R978	ANAM	CRD20TJ752T
464	····5	9A07878500	SW,TACT SKHV10910G	8	S971- S978	ANAM	CST1A012ZT
465	····5	9A07880800	CAP,CERAMIC 0.1UF/50V Z	1	C955	ANAM	HCBS1H104ZFT
466	····5	9A07880800	CAP,CERAMIC 0.1UF/50V Z	2	C974, C975	ANAM	HCBS1H104ZFT
467	····5	9A07881200	CAP,CERAMIC 180PF/50V	3	C747- C749	ANAM	HCBS1H181KBT
468	····5	9A07881200	CAP,CERAMIC 180PF/50V	2	C815, C816	ANAM	HCBS1H181KBT
469	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C939	ANAM	HCBS1H181KBT
470	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C954	ANAM	HCBS1H181KBT
471	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C971	ANAM	HCBS1H181KBT
472	····5	9A07881300	CAP,CERAMIC 22PF/50V	3	C277- C279	ANAM	HCBS1H220JT
473	····5	9A07881300	CAP,CERAMIC 22PF/50V	3	C289- C291	ANAM	HCBS1H220JT
474	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C143, C144	ANAM	HCBS1H223ZFT
475	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	3	C161- C163	ANAM	HCBS1H223ZFT
476	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C168, C169	ANAM	HCBS1H223ZFT
477	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C823, C824	ANAM	HCBS1H223ZFT
478	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C904	ANAM	HCBS1H223ZFT
479	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C937	ANAM	HCBS1H223ZFT
480	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C941, C952	ANAM	HCBS1H223ZFT
481	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C961, C962	ANAM	HCBS1H223ZFT
482	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C965, C966	ANAM	HCBS1H223ZFT
483	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C977, C978	ANAM	HCBS1H223ZFT
484	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C981	ANAM	HCBS1H223ZFT
485	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C842	ANAM	HCEA0JH102T
486	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C905	ANAM	HCEA0JH102T
487	····5	9A07882300	CAP,ELECT 470/10V	3	C280- C282	ANAM	HCEA1AH471T
488	····5	9A07882300	CAP,ELECT 470/10V	3	C292- C294	ANAM	HCEA1AH471T
489	····5	9A07882300	CAP,ELECT 470/10V	1	C846	ANAM	HCEA1AH471T
490	····5	9A07882300	CAP,ELECT 470/10V	1	C903	ANAM	HCEA1AH471T
491	····5	9A07882400	CAP,ELECT 100UF/16V	2	C255, C257	ANAM	HCEA1CH101T
492	····5	9A07882400	CAP,ELECT 100UF/16V	3	C728- C730	ANAM	HCEA1CH101T
493	····5	9A07882400	CAP,ELECT 100UF/16V	1	C745	ANAM	HCEA1CH101T
494	····5	9A07882400	CAP,ELECT 100UF/16V	2	C819, C820	ANAM	HCEA1CH101T
495	····5	9A07882400	CAP,ELECT 100UF/16V	2	C825, C826	ANAM	HCEA1CH101T
496	····5	9A07882400	CAP,ELECT 100UF/16V	1	C908	ANAM	HCEA1CH101T

497	····5	9A07882600	CAP,ELECT 220/16V	1	C845	ANAM	HCEA1CH221T
498	····5	9A07882600	CAP,ELECT 220/16V	1	C848	ANAM	HCEA1CH221T
499	····5	9A07882900	CAP,ELECT 47/16V (S)	2	C737, C738	ANAM	HCEA1CKS100T
500	····5	9A07883000	CAP,ELECT 47/25V	2	C907, C909	ANAM	HCEA1EH470T
501	····5	9A07883000	CAP,ELECT 47/25V	1	C918	ANAM	HCEA1EH470T
502	····5	9A07883500	CAP,ELECT 2.2UF/50V	1	C938	ANAM	HCEA1HH2R2T
503	····5	9A07883800	CAP,ELECT 47/50V	1	C925	ANAM	HCEA1HH470T
504	····5	9A07884100	CAP,ELECT 100/35V	1	C835	ANAM	HCEA1VH101T
505	····5	9A07886600	COIL,AXAIL 10UH	1	L901	ANAM	HLQ02C100KT
506	····5	9A07887900	TR,KSB811YT	1	Q909	ANAM	HVTKSB811YT
507	····5	9A07888000	TR,KSC2316YT	1	Q831	ANAM	HVTKSC2316YT
508	····5	9A07888000	TR,KSC2316YT	1	Q923	ANAM	HVTKSC2316YT
509	····5	9A07894800	RES,CARBON CRD20TJ1R0T	1	R982	ANAM	CRD20TJ1R0T
510	····5	9A07894900	RES,CARBON CRD20TJ221T	1	R958	ANAM	CRD20TJ221T
511	····5	9A07895300	RES,CARBON CRD20TJ331T	7	R729- R735	ANAM	CRD20TJ331T
512	····5	9A07895300	RES,CARBON CRD20TJ331T	6	R852- R857	ANAM	CRD20TJ331T
513	····5	9A07895300	RES,CARBON CRD20TJ331T	1	R954	ANAM	CRD20TJ331T
514	····5	9A07897000	CAP,ELECT HCEA1CH471T	2	C131, C132	ANAM	HCEA1CH471T
515	····5	9A07897000	CAP,ELECT HCEA1CH471T	1	C841	ANAM	HCEA1CH471T
516	····5	9A07897000	CAP,ELECT HCEA1CH471T	1	C851	ANAM	HCEA1CH471T
517	····5	9A07897400	CAP,ELECT HCEA1HH0R1T	1	C910	ANAM	HCEA1HH0R1T
518	····5	9A07897700	CAP,ELECT HCEA1HKS1R0T	1	C976	ANAM	HCEA1HKS1R0T
519	····5	9A07898000	CAP,MYLAR HCQI1H153JZT	2	C741, C742	ANAM	HCQI1H153JZT
520	····5	9A07898600	TR,KSD1021YT	1	Q928	ANAM	HVTKSD1021YT
521	····5	9A07901800	RES,CARBON CRD20TJ4R7T	1	R851	ANAM	CRD20TJ4R7T
522	····5	9A07901900	RES,CARBON CRD20TJ470T	5	R913- R917	ANAM	CRD20TJ470T
523	····5	9A07902900	CAP,CERAMIC 220PF/50V	2	C151, C152	ANAM	HCBS1H221KBT
524	····5	9A07903000	DIODE , ZENER MTZJ7.5A	2	D729, D730	ANAM	HVDMTZJ7.5AT
525	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	2	R703, R704	ANAM	CRD20TJ682T
526	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	5	R707- R711	ANAM	CRD20TJ682T
527	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	1	R719	ANAM	CRD20TJ682T
528	····5	9A08218400	CAP,ELECT A1CKS470T	2	C951, C953	ANAM	HCEA1CKS470T
529	····5	9A08878200	DIODE 1SS133T-77	2	D745, D746	ANAM	HVD1SS133MT
530	····5	9A08878200	DIODE 1SS133T-77	2	D781, D831	ANAM	HVD1SS133MT
531	····5	9A08878200	DIODE 1SS133T-77	2	D832, D837	ANAM	HVD1SS133MT
532	····5	9A08878200	DIODE 1SS133T-77	1	D903	ANAM	HVD1SS133MT
533	····5	9A08878200	DIODE 1SS133T-77	2	D907, D909	ANAM	HVD1SS133MT
534	····5	9A08905600	CAP,ELECT A1VH100T	2	C145, C146	ANAM	HCEA1VH100T
535	····5	9A08905600	CAP,ELECT A1VH100T	1	C712	ANAM	HCEA1VH100T
536	····5	9A08905600	CAP,ELECT A1VH100T	2	C715, C716	ANAM	HCEA1VH100T
537	····5	9A08905600	CAP,ELECT A1VH100T	1	C727	ANAM	HCEA1VH100T
538	····5	9A08905600	CAP,ELECT A1VH100T	2	C751, C752	ANAM	HCEA1VH100T
539	····5	9A08905600	CAP,ELECT A1VH100T	2	C761, C762	ANAM	HCEA1VH100T
540	····5	9A08905600	CAP,ELECT A1VH100T	2	C771, C772	ANAM	HCEA1VH100T
541	····5	9A08905600	CAP,ELECT A1VH100T	2	C777, C778	ANAM	HCEA1VH100T
542	····5	9A08905600	CAP,ELECT A1VH100T	2	C791, C792	ANAM	HCEA1VH100T
543	····5	9A08905600	CAP,ELECT A1VH100T	2	C797, C798	ANAM	HCEA1VH100T
544	····5	9A08905600	CAP,ELECT A1VH100T	2	C811, C812	ANAM	HCEA1VH100T
545	····5	9A08955200	RES,CARBON 20TJ622T	2	R713, R714	ANAM	CRD20TJ622T
546	····5	9A09034300	RES,CARBON	3	R274- R276	ANAM	CRD20TJ680T

547	····5	9A09034300	RES,CARBON	3	R286- R288	ANAM	CRD20TJ680T
548	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C759, C760	ANAM	CCCT1H470JC
549	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C775, C776	ANAM	CCCT1H470JC
550	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C795, C796	ANAM	CCCT1H470JC
551	····5	9A09336600	CAP,CERAMIC T1H103ZF	4	C721- C724	ANAM	CCKT1H103ZF
552	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C765	ANAM	CCKT1H103ZF
553	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C767, C768	ANAM	CCKT1H103ZF
554	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C781	ANAM	CCKT1H103ZF
555	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C783, C784	ANAM	CCKT1H103ZF
556	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C801	ANAM	CCKT1H103ZF
557	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C803, C804	ANAM	CCKT1H103ZF
558	····5	9A09336800	CAP,CERAMIC T1H151KB	6	C107- C112	ANAM	CCKT1H151KB
559	····5	9A09336800	CAP,CERAMIC T1H151KB	4	C119- C122	ANAM	CCKT1H151KB
560	····5	9A09336800	CAP,CERAMIC T1H151KB	2	C127, C128	ANAM	CCKT1H151KB
561	····5	9A09336900	CAP,CERAMIC T1H181KB	1	C711	ANAM	CCKT1H181KB
562	····5	9A09336900	CAP,CERAMIC T1H181KB	2	C713, C714	ANAM	CCKT1H181KB
563	····5	9A09336900	CAP,CERAMIC T1H181KB	3	C733- C735	ANAM	CCKT1H181KB
564	····5	9A09336900	CAP,CERAMIC T1H181KB	1	C757	ANAM	CCKT1H181KB
565	····5	9A09336900	CAP,CERAMIC T1H181KB	4	C854- C857	ANAM	CCKT1H181KB
566	····5	9A09337000	CAP,CERAMIC T1H221KB	3	C274- C276	ANAM	CCKT1H221KB
567	····5	9A09337000	CAP,CERAMIC T1H221KB	3	C286- C288	ANAM	CCKT1H221KB
568	····5	9A09337300	CAP,CERAMIC T1H471KB	3	C135- C137	ANAM	CCKT1H471KB
569	····5	9A09344300	CAP,CERAMIC S1H470JT	2	C813, C814	ANAM	HCBS1H470JT
570	····5	9A09344300	CAP,CERAMIC S1H470JT	5	C913- C917	ANAM	HCBS1H470JT
571	····5	9A09344400	L.E.D , YELLOW	1	D958	ANAM	HVD342YCTB7T089
572	····5	9A09557200	CAP,CERAMIC T1H104ZF	1	C746	ANAM	CCKT1H104ZF
573	····5	9A09570800	CAP,FILM E1J334JBT	2	C743, C744	ANAM	KCFE1J334JBT
574	····5	9A09579100	MAIN PCB	1		ANAM	CUP11527Y
575	····5	9A09600900	CAP,MYLAR I1H822JZT	1	C726	ANAM	HCQI1H822JZT
576	····5	9A09600900	CAP,MYLAR I1H822JZT	2	C739, C740	ANAM	HCQI1H822JZT
577	····5	9A09604700	TR,KRA102MT	1	Q167	ANAM	HVTKRA102MT
578	····5	9A09604700	TR,KRA102MT	2	Q726, Q745	ANAM	HVTKRA102MT
579	····5	9A09604700	TR,KRA102MT	2	Q835, Q836	ANAM	HVTKRA102MT
580	····5	9A09604700	TR,KRA102MT	1	Q917	ANAM	HVTKRA102MT
581	····5	9A09604700	TR,KRA102MT	2	Q924, Q927	ANAM	HVTKRA102MT
582	····5	9A09604700	TR,KRA102MT	2	Q938, Q953	ANAM	HVTKRA102MT
583	····5	9A09604900	TR,KRC102MT	2	Q833, Q834	ANAM	HVTKRC102MT
584	····5	9A09604900	TR,KRC102MT	2	Q837, Q838	ANAM	HVTKRC102MT
585	····5	9A09604900	TR,KRC102MT	1	Q845	ANAM	HVTKRC102MT
586	····5	9A09604900	TR,KRC102MT	1	Q918	ANAM	HVTKRC102MT
587	····5	9A09604900	TR,KRC102MT	2	Q932, Q933	ANAM	HVTKRC102MT
588	····5	9A09604900	TR,KRC102MT	2	Q937, Q939	ANAM	HVTKRC102MT
589	····5	9A09604900	TR,KRC102MT	2	Q954, Q955	ANAM	HVTKRC102MT
590	····5	9A09604900	TR,KRC102MT	2	Q957, Q958	ANAM	HVTKRC102MT
591	····5	9A09610900	CAP,CERAMIC T1H681KB	3	C271- C273	ANAM	CCKT1H681KB
592	····5	9A09610900	CAP,CERAMIC T1H681KB	3	C283- C285	ANAM	CCKT1H681KB
593	····5	9A09613400	CAP , CERAMIC	2	C901, C902	ANAM	HCBS1H180JT
594	····5	9A09613900	COIL	3	L271- L273	ANAM	HLQ02C1R8KT
595	····5	9A09613900	COIL	3	L281- L283	ANAM	HLQ02C1R8KT
596	····5	9A09616000	TR,MUTE	2	Q165, Q166	ANAM	HVTKTC2874BT

597	····5	9A09616000	TR,MUTE	1	Q725	ANAM	HVTKTC2874BT
598	····5	9A09616000	TR,MUTE	2	Q765, Q766	ANAM	HVTKTC2874BT
599	····5	9A09616000	TR,MUTE	2	Q781, Q782	ANAM	HVTKTC2874BT
600	····5	9A09616000	TR,MUTE	2	Q801, Q802	ANAM	HVTKTC2874BT
601	····5	9A09616000	TR,MUTE	2	Q825, Q826	ANAM	HVTKTC2874BT
602	···4	9A09604000	IC,VOLUME	1	IC73	ANAM	HVIM62446AFP
603	···4	9A09604100	IC,EXPANDER	1	IC74	ANAM	HVINJU3713G
604	···4	9A09606100	WAFER	1	CN11	ANAM	KJP15GA98ZM
605	···4	9A09606200	WAFER	1	BN11	ANAM	KJP15GB99ZM
606	···4	9A09608000	PLATE,EARTH	1		ANAM	CMC1A111
607	···4	9A09614600	VR , ENCODER	1	VR92	ANAM	HSR2A018Z
608	···4	9A09615900	T.R	2	Q842, Q846	ANAM	HVTKSB1151Y
609	···4	9A09616500	WAFER, CARD CABLE	1	CN10	ANAM	KJP25GA117ZG
610	··3	9A09595700	INSULATOR,CABLE	1		ANAM	CMX1A138
611	··3	9A09596300	LABEL,FUSE CAUTION	1		ANAM	CQB1A173Z
612	··3	9A09598300	SCREW	2		ANAM	CTB3+8F
613	··3	9A09601800	FAN,MOTOR	1		ANAM	HDMF410T12L1C01
614	··3	9A09607200	CUSHION	2		ANAM	CHG1A218
615	··3	9A09607900	FERRITE,RING	1		ANAM	CLZ9W003Z
616	··3	9A09609400	FOOT	4		ANAM	HKL1A074Z
617	··3	9A09611200	CUSHION,MECHA	2		ANAM	CHG1A239
618	··3	9A09611410	REAR PANEL	1		ANAM	CKF2A238X
619	··3	9A09611500	BRACKET,PCB	1		ANAM	CMD1A395
620	··3	9A09611700	INSULATOR,SMPS	1		ANAM	CMX2A133
621	··3	9A09611810	MODULE,TUNER	1		ANAM	CNVMV001MA0-17
622	··3	9A09611910	SMPS PCB ASS'Y	1		ANAM	COPDDS115B
623	···4	9A09612710	PCB,SMPS	1		ANAM	CUPDDS115B
624	··3	9A09612600	CHAASIS,BOTTOM	1		ANAM	CUA2A216
625	··3	9A09612900	CARD CABLE	3		ANAM	CWC1B4A21A100B6
626	··3	9A09613000	CABLE,CARD	1		ANAM	CWC1C4A13B080B
627	··3	9A09616700	SHIELD,CUSHION	1		ANAM	KMC1A196
628	·2	9A09598400	SCREW	2		ANAM	CTB4+6FFC
629	·2	9A09607700	TOP CABINET	1		ANAM	CKC1B131S35
630	1	9A09579210	INSTRUCTION MNL ASSY T/C	1		ANAM	CQXDRL700TCCC
631	·2	9A06752300	STAPLE 0905	3		ANAM	KPL0905
632	·2	9A08125700	BAG,POLY	2		ANAM	CPB1061Y
633	·2	9A09055200	BATTERY	2		ANAM	HABAAM1.5V
634	·2	9A09478400	OWNER'S MNL,EFS-TC DRL7(	1		ANAM	CQX1A794Z
635	·2	9A09562000	FM 1 POL ANT(UL)	1		ANAM	CSA1A019Z
636	·2	9A09562100	AM LOOP ANT	1		ANAM	CSA1A020Z
637	·2	9A09610200	REMOCON ASS'Y	1		ANAM	CARTDRL700TC
638	·2	9A09611300	CORD.PIN (1P)	1		ANAM	CJS4M023Z
639	1	9A09596600	LABEL,DTS	1		ANAM	CQB1A582Z
640	1	9A09608300	PAD,SNOW(L)	1		ANAM	CPS1A579
641	1	9A09608400	PAD,SNOW(R)	1		ANAM	CPS1A580
642	1	9A09612000	BOX,OUT CARTON	1		ANAM	CPG1A689Z
643	1	9A09612100	PAD,GUIDE	1		ANAM	CPG1A715
644	1	9A09612210	CODE,RESION T/C	2		ANAM	CQE1A182Z
645	1	9A09612300	LABEL,CLASS1 LASER	1		ANAM	CQX1A293Z
646	1	9A05326600	CLAMPER,ARM	1		ANAM	KHE154
647	1	9A05335600	LABEL,SERIAL NO	2		ANAM	KQT1A046

648	1	9A05983800	TAPE,OPP CLEAR 50M/M	1		ANAM	K4FC500CL
649	1	9A06751300	STAPLE 6500	8		ANAM	KPL6500
650	1	9A07005300	TAPE,P.P	1		ANAM	K4FC240CL
651	1	9A07052700	RIBON,BAR CODE	1		ANAM	KQS1A001
652	1	9A07874100	BAG,POLY(SET) H-100	1		ANAM	CPP1A082Z
653	1	9A09561300	LABEL,BAR CODE	2		ANAM	CQT1A144
654	1	9A09572300	LABEL,FDA(T/C)	1		ANAM	CQB1A581Z
655	1	9A09572400	LABEL,FCC(T/C)	1		ANAM	CQB1A583Z

DVD RECEIVER,RD-L700 EUR

	LEVEL	PARTS NO.	DESCRIPTION	Q'TY	REF NO.	MFR	OEM NO.
1	1	9A09577920	SET,DVD RECEIVER EUR	1		ANAM	DR-L700EURCCSET
2	·2	9A09562500	SCREW	4		ANAM	CTVD3+8JFZ
3	·2	9A09578020	FRONT PANEL ASSY EUR	1		ANAM	CGWDRL700EURCC
4	··3	9A09331900	SCREW,CTB3+10G	7		ANAM	CTB3+10G
5	··3	9A09594600	WINDOW,SENSOR	1		ANAM	CGU1A287A14K101
6	··3	9A09598500	SCREW	9		ANAM	CTS3+10J
7	··3	9A09606800	SPRING,VOLUME	1		ANAM	KUS1A132
8	··3	9A09610300	KNOB,RDS(DIFFUSION)	1		ANAM	CBT1A838RAYK101
9	··3	9A09610400	KNOB,POWER(DIFFUSION)	1		ANAM	CBT1A838RAZK101
10	··3	9A09610500	KNOB,BAND	1		ANAM	CBT1A839C22
11	··3	9A09610600	KNOB,RDS	1		ANAM	CBY1A027RA
12	··3	9A09610700	KNOB,POWER	1		ANAM	CBY1A028RA
13	··3	9A09610800	KNOB,POWER(LIGHTING)	2		ANAM	CBY1A029
14	··3	9A09611000	DOOR,DVD	1		ANAM	CGR1A276M7ZK101
15	··3	9A09611100	PANEL,MOLD	1		ANAM	CGW1A343R6K101
16	··3	9A09615600	WINDOW,FIP	1		ANAM	KGU1A288Z
17	··3	9A09616300	VOLUME KNOB ASS'Y	2		ANAM	KGK1A079ZA
18	···4	9A09616100	KNOB,VOLUME(MOLD)	1		ANAM	KBN1A161
19	···4	9A09616200	KNOB,VOLUME(AL)	1		ANAM	KGK1A079C21
20	··3	9A09616620	PANEL,FRONT(AL)	1		ANAM	KKM1A124ZC35
21	·2	9A09578120	BOTTOM CHASSIS ASSY EUR	1		ANAM	CUADRL700EURCC
22	··3	9A05327300	CLAMPER KHR301	4		ANAM	KHR301
23	··3	9A06053500	TAPE,FILAMENT	1		ANAM	K4FE190
24	··3	9A06066300	COMPOUND,SILICONE	1		ANAM	K8AYG6260
25	··3	9A06229300	CUSHION,FOOT	4		ANAM	KHG1A039Z
26	··3	9A06318700	LOCKER	4		ANAM	KRE1A037
27	··3	9A06754900	BUSHING,AC CORD	1		ANAM	KHR1A028
28	··3	9A07916700	CORD,POWER 2.5A 250V EUR	1		ANAM	CJA2B043Z
29	··3	9A08885700	RUBBER	2		ANAM	CHG1A113
30	··3	9A09330500	SCREW,CTB3+10GFZ	12		ANAM	CTB3+10GFZ
31	··3	9A09330700	SCREW,CTB3+8JFZ	1		ANAM	CTB3+8JFZ
32	··3	9A09333000	SCREW,CTW3+8J	7		ANAM	CTW3+8J
33	··3	9A09338300	SCREW	14		ANAM	CTB3+6J
34	··3	9A09343900	SCREW	2		ANAM	CTW3+14J
35	··3	9A09561500	STICKER,CAUTION	1		ANAM	CQX1A294Z
36	··3	9A09562200	SCREW,DOT	1		ANAM	CTBD3+10JFC
37	··3	9A09578220	MECHANISM ASSY EUR	1		ANAM	CJDDRL700EUR
38	···4	9A09578310	DVD MAIN PCB SMD ASSY T/C	1		ANAM	CIP11538BSMD
39	····5	9A09256400	40P HEADER (ANGLE TYPE)	1	CN12	ANAM	KJP40GB80ZP
40	····5	9A09564800	CAP,CHIP ELECT	1	C124	ANAM	HCEC0JRV2101T
41	····5	9A09564800	CAP,CHIP ELECT	1	C173	ANAM	HCEC0JRV2101T
42	····5	9A09564800	CAP,CHIP ELECT	1	C188	ANAM	HCEC0JRV2101T

43	····5	9A09564800	CAP,CHIP ELECT	1	C285	ANAM	HCEC0JRV2101T
44	····5	9A09564800	CAP,CHIP ELECT	1	C324	ANAM	HCEC0JRV2101T
45	····5	9A09565000	CAP,CHIP ELECT C0JRV2470T	2	C103, C111	ANAM	HCEC0JRV2470T
46	····5	9A09565000	CAP,CHIP ELECT C0JRV2470T	2	C238, C239	ANAM	HCEC0JRV2470T
47	····5	9A09565000	CAP,CHIP ELECT C0JRV2470T	1	C248	ANAM	HCEC0JRV2470T
48	····5	9A09565000	CAP,CHIP ELECT C0JRV2470T	1	C317	ANAM	HCEC0JRV2470T
49	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C101, C102	ANAM	HCUS1E104ZF
50	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C112, C114	ANAM	HCUS1E104ZF
51	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C123	ANAM	HCUS1E104ZF
52	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C129, C130	ANAM	HCUS1E104ZF
53	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C143, C145	ANAM	HCUS1E104ZF
54	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C150	ANAM	HCUS1E104ZF
55	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C155, C156	ANAM	HCUS1E104ZF
56	····5	9A09565600	CAP,CHIP, 0.1UF ZF	4	C158- C161	ANAM	HCUS1E104ZF
57	····5	9A09565600	CAP,CHIP, 0.1UF ZF	4	C164- C168	ANAM	HCUS1E104ZF
58	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C179	ANAM	HCUS1E104ZF
59	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C191	ANAM	HCUS1E104ZF
60	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C227, C228	ANAM	HCUS1E104ZF
61	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C236	ANAM	HCUS1E104ZF
62	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C244	ANAM	HCUS1E104ZF
63	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C259, C261	ANAM	HCUS1E104ZF
64	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C287	ANAM	HCUS1E104ZF
65	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C316	ANAM	HCUS1E104ZF
66	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C318	ANAM	HCUS1E104ZF
67	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C322, C323	ANAM	HCUS1E104ZF
68	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	4	BD05- BD08	ANAM	HRJ10DJ0R0T
69	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R207, R208	ANAM	HRJ10DJ0R0T
70	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R253	ANAM	HRJ10DJ0R0T
71	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R257, R258	ANAM	HRJ10DJ0R0T
72	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R278	ANAM	HRJ10DJ0R0T
73	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R283	ANAM	HRJ10DJ0R0T
74	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R333	ANAM	HRJ10DJ0R0T
75	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R342	ANAM	HRJ10DJ0R0T
76	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R349	ANAM	HRJ10DJ0R0T
77	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R367, R373	ANAM	HRJ10DJ0R0T
78	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R117, R118	ANAM	HRJ10DJ100T
79	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R125, R126	ANAM	HRJ10DJ100T
80	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R203	ANAM	HRJ10DJ100T
81	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R116	ANAM	HRJ10DJ102T
82	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R172	ANAM	HRJ10DJ102T
83	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R249	ANAM	HRJ10DJ102T
84	····5	9A09567700	RES,CHIP 10DJ103T	1	R171	ANAM	HRJ10DJ103T
85	····5	9A09567700	RES,CHIP 10DJ103T	5	R173- R177	ANAM	HRJ10DJ103T
86	····5	9A09567800	RES,CHIP 10DJ104T	1	R307	ANAM	HRJ10DJ104T
87	····5	9A09568200	RES,CHIP(1/10W) 10DJ221T	1	R115	ANAM	HRJ10DJ221T
88	····5	9A09568200	RES,CHIP(1/10W) 10DJ221T	1	R280	ANAM	HRJ10DJ221T
89	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	1	R121	ANAM	HRJ10DJ473T

90	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	1	R127	ANAM	HRJ10DJ473T
91	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	4	R154- R157	ANAM	HRJ10DJ473T
92	····5	9A09569500	RES,CHIP(1/10W) 75 OHM J	2	R351, R366	ANAM	HRJ10DJ750T
93	····5	9A09578400	DVD MAIN PCB	0,5		ANAM	CUP11538Z
94	····5	9A09601300	CAP,CHIP 150PF JA	1	C163	ANAM	HCUS1H151JA
95	····5	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R222, R223	ANAM	HRJ10DJ101T
96	····5	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R225	ANAM	HRJ10DJ101T
97	····5	9A09602500	RES,CHIP (1/10W)	1	R178	ANAM	HRJ10DJ121T
98	····5	9A09602500	RES,CHIP (1/10W)	1	R339	ANAM	HRJ10DJ121T
99	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	1	R153	ANAM	HRJ10DJ330T
100	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R193, R194	ANAM	HRJ10DJ330T
101	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	1	R201	ANAM	HRJ10DJ330T
102	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R301, R306	ANAM	HRJ10DJ330T
103	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R381, R382	ANAM	HRJ10DJ330T
104	····5	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R309	ANAM	HRJ10DJ331T
105	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R107	ANAM	HRJ10DJ472T
106	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R120	ANAM	HRJ10DJ472T
107	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	5	R158- R162	ANAM	HRJ10DJ472T
108	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R170	ANAM	HRJ10DJ472T
109	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	3	R197- R200	ANAM	HRJ10DJ472T
110	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R228	ANAM	HRJ10DJ472T
111	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R251, R252	ANAM	HRJ10DJ472T
112	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	3	R262- R264	ANAM	HRJ10DJ472T
113	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	8	R311- R318	ANAM	HRJ10DJ472T
114	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R374, R375	ANAM	HRJ10DJ472T
115	····5	9A09603200	RES,CHIP 10DJ680T	1	R256	ANAM	HRJ10DJ680T
116	····5	9A09603200	RES,CHIP 10DJ680T	1	R259	ANAM	HRJ10DJ680T
117	····5	9A09603200	RES,CHIP 10DJ680T	2	R344, R346	ANAM	HRJ10DJ680T
118	····5	9A09613500	CAP,ELEC (SMD)	2	C222, C223	ANAM	HCEC1CRV2100T
119	····5	9A09613500	CAP,ELEC (SMD)	3	C233- C235	ANAM	HCEC1CRV2100T
120	····5	9A09613600	CAP,CHIP 27PF JA	2	C297, C298	ANAM	HCUS1H270JA
121	····5	9A09614200	CRYSTAL,CHIP(27MHZ,SMD)	1	X102	ANAM	HOX27000E180S
122	····5	9A09614300	RES,CHIP (1/10W)	1	R101	ANAM	HRJ10DJ361T
123	····5	9A09614500	RES,4ARRAY	12	RN01- RN12	ANAM	HRJ104DJ330T
124	····5	9A09614500	RES,4ARRAY	2	RN14, RN15	ANAM	HRJ104DJ330T
125	····5	9A09614700	DIODE,SCHOTTKEY BARRIER	1	D101	ANAM	HVDRB160L60TE25
126	····5	9A09614800	IC,VIDEO SWITCH	1	IC05	ANAM	HVIBA7609F
127	····5	9A09614900	VIDEO AMP	2	IC16, IC19	ANAM	HVIBA7622F
128	····5	9A09615000	IC,EEPROM(16K)	1	IC13	ANAM	HVIBR24C16F
129	····5	9A09615100	IC,I2C BUS	1	IC15	ANAM	HVIBU2098F
130	····5	9A09615200	DVD MPEG DECODER IC	1	IC01	ANAM	HVIES6028F
131	····5	9A09615300	IC,FLASH MEMORY	1	IC03	ANAM	HVIHY29F800BT90
132	····5	9A09615400	IC,64MSDRAM	1	IC10	ANAM	HVIHY57V641620D
133	····5	9A09615500	IC,ADJ REGULATOR	1	IC09	ANAM	HVIRC1117ST
134	····5	9A09615800	IC,INVERTER	1	IC07	ANAM	HVI74VHC04MX
135	····5	9A09616500	WAFER, CARD CABLE	1	CN10	ANAM	KJP25GA117ZG
136	···4	9A09608000	PLATE,EARTH	1		ANAM	CMC1A111

137	···4	9A09611600	INSULATOR , MECHA	1		ANAM	CMX1A137
138	···4	9A09613100	CARD CABLE (SHIELD)	1		ANAM	CWC3B2A25A150B6
139	···4	9A09613200	WIRE ASS'Y	1		ANAM	CWZDR700BN47
140	···4	9A09613300	CABLE,ATAPI(FLATE,40P)	1		ANAM	CWZHTS5000BN12
141	···4	9A09613700	1 DVD MECHANISM (HD3 P/U)	1		ANAM	HJDRL-A700HD3
142	··3	9A09578510	AMP PCB ASSY	1		ANAM	COP11526B
143	···4	9A06066300	COMPOUND,SILICONE	1		ANAM	K8AYG6260
144	···4	9A07050600	BEAD,CORE	4	BD51- BD54	ANAM	KLZ9H001Z
145	···4	9A07050600	BEAD,CORE	1	BD56	ANAM	KLZ9H001Z
146	···4	9A07884200	CAP,ELECT 1000/35V	1	C564	ANAM	HCEA1VH102E
147	···4	9A07889800	CONNECTOR MOLEX35237-06	1	BN31	ANAM	KJP06GB99ZM
148	···4	9A08036700	WAFER	1	BN51	ANAM	KJP10GB99ZM
149	···4	9A08126500	MODULE,OPTICAL	1	JK33	ANAM	HJS9L001Z
150	···4	9A08789600	WAFER , CARD CABLE (21P 1	1	CN33	ANAM	KJP21GA117ZG
151	···4	9A09058500	RELAY	1	RY51	ANAM	HSL4A010ZU
152	···4	9A09330600	SCREW,CTB3+8J	2		ANAM	CTB3+8J
153	···4	9A09558800	JACK,INPUT(1PIN,GOLD PLAT	1	JK31	ANAM	CJJ4M042Z
154	···4	9A09559100	TERMINAL,SPEAKER	1	JK51	ANAM	CJJ5P012Z
155	···4	9A09559500	COIL,SPEAKER	4	L541- L544	ANAM	CLZ9Z011Z
156	···4	9A09559700	BRACKET , PCB	1	BK51	ANAM	CMD1A387
157	···4	9A09564400	WIRE ASS'Y	1	JW51	ANAM	CWE8202110RV
158	···4	9A09569900	RELAY	1	RY52	ANAM	HSL1A008ZE
159	···4	9A09570600	IC,DIGITAL AMP.	1	IC52	ANAM	HVITP2050
160	···4	9A09571700	RES,METAL OXIDE FILM	1	R598	ANAM	KRG2ANJ102H
161	···4	9A09578610	AMP PCB AUTO ASSY	1		ANAM	CIP11526B
162	····5	9A05194700	DIODE,1N4003ST	1	D355	ANAM	KVD1N4003ST
163	····5	9A05896200	R.,100-OHM,1/4W	1	R561	ANAM	KRD25FJ101T
164	····5	9A06234200	R,CARBON 25FJ151T	2	R566, R567	ANAM	KRD25FJ151T
165	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C351	ANAM	HCEA0JH102T
166	····5	9A07882300	CAP,ELECT 470/10V	1	C353	ANAM	HCEA1AH471T
167	····5	9A07882300	CAP,ELECT 470/10V	1	C533	ANAM	HCEA1AH471T
168	····5	9A07882300	CAP,ELECT 470/10V	1	C565	ANAM	HCEA1AH471T
169	····5	9A07882400	CAP,ELECT 100UF/16V	1	C335	ANAM	HCEA1CH101T
170	····5	9A07882400	CAP,ELECT 100UF/16V	2	C341, C344	ANAM	HCEA1CH101T
171	····5	9A07882400	CAP,ELECT 100UF/16V	2	C354, C355	ANAM	HCEA1CH101T
172	····5	9A07882400	CAP,ELECT 100UF/16V	1	C373	ANAM	HCEA1CH101T
173	····5	9A07883000	CAP,ELECT 47/25V	2	C312, C315	ANAM	HCEA1EH470T
174	····5	9A07883000	CAP,ELECT 47/25V	1	C337	ANAM	HCEA1EH470T
175	····5	9A07883000	CAP,ELECT 47/25V	2	C563, C568	ANAM	HCEA1EH470T
176	····5	9A07883500	CAP,ELECT 2.2UF/50V	1	C374	ANAM	HCEA1HH2R2T
177	····5	9A07883500	CAP,ELECT 2.2UF/50V	2	C503, C504	ANAM	HCEA1HH2R2T
178	····5	9A07885500	CAP,MYLAR 0.01UF/50V	1	C378	ANAM	HCQI1H103JZT
179	····5	9A07888000	TR,KSC2316YT	2	Q354, Q563	ANAM	HVTKSC2316YT
180	····5	9A07898400	DIODE,ZENER ZJ5.6BT	1	D564	ANAM	HVDMTZJ5.6BT
181	····5	9A08218800	CAP,FILM 0.1UF 63V J	8	C543- C550	ANAM	KCFE1J104JBT
182	····5	9A08878200	DIODE 1SS133T-77	2	D541, D561	ANAM	HVD1SS133MT
183	····5	9A08905600	CAP,ELECT A1VH100T	2	C303, C304	ANAM	HCEA1VH100T

184	····5	9A08905600	CAP,ELECT A1VH100T	2	C401, C402	ANAM	HCEA1VH100T
185	····5	9A08905600	CAP,ELECT A1VH100T	2	C411, C412	ANAM	HCEA1VH100T
186	····5	9A08905600	CAP,ELECT A1VH100T	2	C421, C422	ANAM	HCEA1VH100T
187	····5	9A08905600	CAP,ELECT A1VH100T	2	C431, C432	ANAM	HCEA1VH100T
188	····5	9A08905600	CAP,ELECT A1VH100T	2	C441, C442	ANAM	HCEA1VH100T
189	····5	9A08905600	CAP,ELECT A1VH100T	2	C451, C452	ANAM	HCEA1VH100T
190	····5	9A09561900	RES,CARBON 25TJ6R2T	2	R543, R544	ANAM	CRD25TJ6R2T
191	····5	9A09561900	RES,CARBON 25TJ6R2T	2	R547, R548	ANAM	CRD25TJ6R2T
192	····5	9A09570700	RES,SEMI FIXED(4.7K OHM)	2	VR51, VR52	ANAM	HVN1RA472B01T
193	····5	9A09570900	CAP,FILM(POLYESTER)	2	C551, C552	ANAM	KCFE1J474JBT
194	····5	9A09571600	RES,METAL FILM	2	R541, R542	ANAM	KRG14F2R01T
195	····5	9A09578710	AMP PCB SMD ASSY	1		ANAM	CIP11526BSMD
196	·····6	9A08163400	IC,OP AMP NJM2068MD	1	IC31	ANAM	HVINJM2068MDTE1
197	·····6	9A08163400	IC,OP AMP NJM2068MD	3	IC41- IC43	ANAM	HVINJM2068MDTE1
198	·····6	9A09565400	CAP,CHIP 1UF TANTAL	2	C536, C537	ANAM	HCSGA1V1R0B
199	·····6	9A09565500	CAP,CHIP P2A104KC	2	C531, C532	ANAM	HCUP2A104KC
200	·····6	9A09565500	CAP,CHIP P2A104KC	2	C534, C535	ANAM	HCUP2A104KC
201	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C307, C308	ANAM	HCUS1E104ZF
202	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	1	C327	ANAM	HCUS1E104ZF
203	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	1	C336	ANAM	HCUS1E104ZF
204	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	3	C338- C340	ANAM	HCUS1E104ZF
205	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C345, C348	ANAM	HCUS1E104ZF
206	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C352, C356	ANAM	HCUS1E104ZF
207	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	1	C359	ANAM	HCUS1E104ZF
208	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C372, C375	ANAM	HCUS1E104ZF
209	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	1	C379	ANAM	HCUS1E104ZF
210	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C415, C416	ANAM	HCUS1E104ZF
211	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C435, C436	ANAM	HCUS1E104ZF
212	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C455, C456	ANAM	HCUS1E104ZF
213	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	3	C505- C507	ANAM	HCUS1E104ZF
214	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	6	C525- C530	ANAM	HCUS1E104ZF
215	·····6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C566, C567	ANAM	HCUS1E104ZF
216	·····6	9A09565700	CAP,CHIP S1H101JA	2	C301, C302	ANAM	HCUS1H101JA
217	·····6	9A09565700	CAP,CHIP S1H101JA	1	C311	ANAM	HCUS1H101JA
218	·····6	9A09565700	CAP,CHIP S1H101JA	4	C323- C326	ANAM	HCUS1H101JA
219	·····6	9A09565700	CAP,CHIP S1H101JA	7	C328- C334	ANAM	HCUS1H101JA
220	·····6	9A09565700	CAP,CHIP S1H101JA	2	C342, C343	ANAM	HCUS1H101JA
221	·····6	9A09565700	CAP,CHIP S1H101JA	2	C357, C358	ANAM	HCUS1H101JA
222	·····6	9A09565700	CAP,CHIP S1H101JA	3	C369- C371	ANAM	HCUS1H101JA
223	·····6	9A09565800	CAP,CHIP S1H103KC	6	C553- C558	ANAM	HCUS1H103KC
224	·····6	9A09566200	CAP,CHIP S1H271JA	4	C513- C516	ANAM	HCUS1H271JA
225	·····6	9A09566300	CAP,CHIP S1H331JA	2	C541, C542	ANAM	HCUS1H331JA
226	·····6	9A09566600	CAP,CHIP S1H471JA	1	C377	ANAM	HCUS1H471JA
227	·····6	9A09566600	CAP,CHIP S1H471JA	2	C413, C414	ANAM	HCUS1H471JA
228	·····6	9A09566600	CAP,CHIP S1H471JA	1	C426	ANAM	HCUS1H471JA
229	·····6	9A09566600	CAP,CHIP S1H471JA	2	C433, C434	ANAM	HCUS1H471JA
230	·····6	9A09566600	CAP,CHIP S1H471JA	2	C453, C454	ANAM	HCUS1H471JA

231	·····6	9A09566600	CAP,CHIP S1H471JA	2	C501, C502	ANAM	HCUS1H471JA
232	·····6	9A09566800	CAP,CHIP S1H473ZF	2	C561, C562	ANAM	HCUS1H473ZF
233	·····6	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R599, R600	ANAM	HRJ10DJ0R0T
234	·····6	9A09567500	RES,CHIP(1/10W),10 OHM J	4	R312- R315	ANAM	HRJ10DJ100T
235	·····6	9A09567500	RES,CHIP(1/10W),10 OHM J	5	R323- R327	ANAM	HRJ10DJ100T
236	·····6	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R336, R340	ANAM	HRJ10DJ100T
237	·····6	9A09567500	RES,CHIP(1/10W),10 OHM J	3	R344- R346	ANAM	HRJ10DJ100T
238	·····6	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R348	ANAM	HRJ10DJ100T
239	·····6	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R373, R374	ANAM	HRJ10DJ100T
240	·····6	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R382	ANAM	HRJ10DJ100T
241	·····6	9A09567600	RES,CHIP(1/10W),1K OHM J	2	R367, R368	ANAM	HRJ10DJ102T
242	·····6	9A09567700	RES,CHIP 10DJ103T	2	R301, R302	ANAM	HRJ10DJ103T
243	·····6	9A09567700	RES,CHIP 10DJ103T	8	R359- R366	ANAM	HRJ10DJ103T
244	·····6	9A09567700	RES,CHIP 10DJ103T	1	R372	ANAM	HRJ10DJ103T
245	·····6	9A09567700	RES,CHIP 10DJ103T	1	R377	ANAM	HRJ10DJ103T
246	·····6	9A09567700	RES,CHIP 10DJ103T	2	R407, R408	ANAM	HRJ10DJ103T
247	·····6	9A09567700	RES,CHIP 10DJ103T	2	R427, R428	ANAM	HRJ10DJ103T
248	·····6	9A09567700	RES,CHIP 10DJ103T	2	R447, R448	ANAM	HRJ10DJ103T
249	·····6	9A09567700	RES,CHIP 10DJ103T	2	R509, R510	ANAM	HRJ10DJ103T
250	·····6	9A09567700	RES,CHIP 10DJ103T	2	R527, R528	ANAM	HRJ10DJ103T
251	·····6	9A09567700	RES,CHIP 10DJ103T	1	R530	ANAM	HRJ10DJ103T
252	·····6	9A09567900	RES,CHIP 10DJ113T	1	R522	ANAM	HRJ10DJ113T
253	·····6	9A09568000	RES,CHIP 10DJ153T	4	R517- R520	ANAM	HRJ10DJ153T
254	·····6	9A09568100	RES,CHIP 10DJ183T	1	R341	ANAM	HRJ10DJ183T
255	·····6	9A09568300	RES,CHIP 10DJ222T	2	R405, R406	ANAM	HRJ10DJ222T
256	·····6	9A09568300	RES,CHIP 10DJ222T	3	R424- R426	ANAM	HRJ10DJ222T
257	·····6	9A09568300	RES,CHIP 10DJ222T	2	R445, R446	ANAM	HRJ10DJ222T
258	·····6	9A09568300	RES,CHIP 10DJ222T	2	R525, R526	ANAM	HRJ10DJ222T
259	·····6	9A09568400	RES,CHIP 10DJ223T	1	R524	ANAM	HRJ10DJ223T
260	·····6	9A09568600	RES,CHIP 10DJ332T	2	R354, R355	ANAM	HRJ10DJ332T
261	·····6	9A09568700	RES,CHIP 10DJ333T	2	R376, R378	ANAM	HRJ10DJ333T
262	·····6	9A09568900	RES,CHIP 10DJ471T	2	R305, R306	ANAM	HRJ10DJ471T
263	·····6	9A09568900	RES,CHIP 10DJ471T	3	R329- R331	ANAM	HRJ10DJ471T
264	·····6	9A09568900	RES,CHIP 10DJ471T	1	R343	ANAM	HRJ10DJ471T
265	·····6	9A09568900	RES,CHIP 10DJ471T	2	R357, R358	ANAM	HRJ10DJ471T
266	·····6	9A09568900	RES,CHIP 10DJ471T	1	R379	ANAM	HRJ10DJ471T
267	·····6	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R401, R402	ANAM	HRJ10DJ473T
268	·····6	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R413, R414	ANAM	HRJ10DJ473T
269	·····6	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R421, R422	ANAM	HRJ10DJ473T
270	·····6	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R433, R434	ANAM	HRJ10DJ473T
271	·····6	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R441, R442	ANAM	HRJ10DJ473T
272	·····6	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R453, R454	ANAM	HRJ10DJ473T
273	·····6	9A09569100	RES,CHIP 10DJ474T	4	R505- R508	ANAM	HRJ10DJ474T
274	·····6	9A09569600	RES,CHIP 10DJ822T	1	R521	ANAM	HRJ10DJ822T
275	·····6	9A09570400	IC,GENERATOR	1	IC51	ANAM	HVITC2000
276	·····6	9A09578800	PCB,AMP & DSP	0,5		ANAM	CUP11526Y
277	·····6	9A09601400	CAP,CHIP S1H221JA	2	C405, C406	ANAM	HCUS1H221JA

278	·····6	9A09601400	CAP,CHIP S1H221JA	1	C425	ANAM	HCUS1H221JA
279	·····6	9A09601400	CAP,CHIP S1H221JA	2	C445, C446	ANAM	HCUS1H221JA
280	·····6	9A09601500	CAP,CHIP S1H222KC	2	C305, C306	ANAM	HCUS1H222KC
281	·····6	9A09601500	CAP,CHIP S1H222KC	1	C349	ANAM	HCUS1H222KC
282	·····6	9A09601500	CAP,CHIP S1H222KC	2	C403, C404	ANAM	HCUS1H222KC
283	·····6	9A09601500	CAP,CHIP S1H222KC	2	C423, C424	ANAM	HCUS1H222KC
284	·····6	9A09601500	CAP,CHIP S1H222KC	2	C443, C444	ANAM	HCUS1H222KC
285	·····6	9A09601600	CAP,CHIP S1H330JA	2	C313, C314	ANAM	HCUS1H330JA
286	·····6	9A09601600	CAP,CHIP S1H330JA	2	C321, C322	ANAM	HCUS1H330JA
287	·····6	9A09602000	BEAD,FERRITE(CHIP)	2	L332, L344	ANAM	HLZ9J003Z
288	·····6	9A09602000	BEAD,FERRITE(CHIP)	2	L501, L502	ANAM	HLZ9J003Z
289	·····6	9A09602000	BEAD,FERRITE(CHIP)	1	L545	ANAM	HLZ9J003Z
290	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R307, R308	ANAM	HRJ10DJ101T
291	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R311	ANAM	HRJ10DJ101T
292	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R328	ANAM	HRJ10DJ101T
293	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R342	ANAM	HRJ10DJ101T
294	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	3	R369- R371	ANAM	HRJ10DJ101T
295	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R409, R410	ANAM	HRJ10DJ101T
296	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R415, R416	ANAM	HRJ10DJ101T
297	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R429, R430	ANAM	HRJ10DJ101T
298	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R435, R436	ANAM	HRJ10DJ101T
299	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R449, R450	ANAM	HRJ10DJ101T
300	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R455, R456	ANAM	HRJ10DJ101T
301	·····6	9A09602400	RES,CHIP (1/10W)	1	R321	ANAM	HRJ10DJ105T
302	·····6	9A09602600	RES,CHIP 10DJ123T	2	R303, R304	ANAM	HRJ10DJ123T
303	·····6	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R353	ANAM	HRJ10DJ331T
304	·····6	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R375	ANAM	HRJ10DJ331T
305	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R380, R381	ANAM	HRJ10DJ472T
306	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R403, R404	ANAM	HRJ10DJ472T
307	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R423	ANAM	HRJ10DJ472T
308	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R443, R444	ANAM	HRJ10DJ472T
309	·····6	9A09603700	IC,DIR+CODEC	1	IC32	ANAM	HVIAK4586VQ
310	·····6	9A09603900	IC,DSP	1	IC35	ANAM	HVICS493264-CL
311	·····6	9A09604800	TR,CHIP KRA102S	1	Q503	ANAM	HVTKRA102S
312	·····6	9A09605000	TR,CHIP KRC102S	2	Q501, Q502	ANAM	HVTKRC102S
313	·····6	9A09605000	TR,CHIP KRC102S	2	Q505, Q506	ANAM	HVTKRC102S
314	·····6	9A09605000	TR,CHIP KRC102S	1	Q561	ANAM	HVTKRC102S
315	·····6	9A09609500	RES,CHIP 10DJ122T	4	R513- R516	ANAM	HRJ10DJ122T
316	·····6	9A09609600	RES,CHIP 10DJ203T	2	R503, R504	ANAM	HRJ10DJ203T
317	·····6	9A09609600	RES,CHIP 10DJ203T	2	R511, R512	ANAM	HRJ10DJ203T
318	·····6	9A09614000	COIL,CHIP(22UH,K)	2	L311, L331	ANAM	HLZ9M011Z
319	·····6	9A09614000	COIL,CHIP(22UH,K)	1	L333	ANAM	HLZ9M011Z
320	·····6	9A09614000	COIL,CHIP(22UH,K)	3	L351- L353	ANAM	HLZ9M011Z
321	·····6	9A09614000	COIL,CHIP(22UH,K)	2	L566, L567	ANAM	HLZ9M011Z
322	·····6	9A09614400	RES,CHIP (1/10W)	1	R564	ANAM	HRJ10DJ470T
323	·····6	9A09614700	DIODE,SCHOTTKEY BARRIER	2	D562, D563	ANAM	HVDRB160L60TE25
324	·····6	9A09614700	DIODE,SCHOTTKEY BARRIER	1	D565	ANAM	HVDRB160L60TE25

325	·····6	9A09615700	IC,AND GATE(QUAD/2IN L/V)	1	IC34	ANAM	HVI74LCX08MX
326	····5	9A09603500	DIODE,ZENER	1	D354	ANAM	HVDMTZJ4.3CT
327	····5	9A09612500	RES , CARBON	1	R565	ANAM	CRD25TJ562T
328	····5	9A09614100	CRYSTAL(HC-49/S,ATS)	1	X321	ANAM	HOX12288E220TF
329	···4	9A09608200	PLATE , HEAT SINK	1		ANAM	CMY1A200
330	···4	9A09612800	WIRE ASS'Y	1	BN52	ANAM	CWB1E906150BM
331	···4	9A09613800	MODULE , OPTICAL(RECEIVE)	1	JK32	ANAM	HJSTORX179
332	··3	9A09578920	MAIN PCB ASSY EUR/UK	1		ANAM	COP11527B
333	···4	9A05329300	WAFER MOLEX 5267-04A	1	CN64	ANAM	KJP04GA01ZM
334	···4	9A06230200	JACK , REMOTE(2P)	1	JK13	ANAM	KJJ4N023Z
335	···4	9A06861800	JACK,HEADPHONE	1	JK14	ANAM	BJJ2E021Z
336	···4	9A07889700	WAFER MOLEX35336-0610	1	CN31	ANAM	KJP06GA98ZM
337	···4	9A08036600	WAFER,MOLEX35336-1010	1	CN51	ANAM	KJP10GA98ZM
338	···4	9A08126400	JACK,HEADPHONE(SILVER)	1	JK91	ANAM	HJJ2D003Y
339	···4	9A08152300	SCART CONNECTOR	1	JK23	ANAM	KJP21GA118ZP
340	···4	9A08163400	IC,OP AMP NJM2068MD	1	IC12	ANAM	HVINJM2068MDTE1
341	···4	9A08163400	IC,OP AMP NJM2068MD	2	IC71, IC72	ANAM	HVINJM2068MDTE1
342	···4	9A08163400	IC,OP AMP NJM2068MD	3	IC75- IC77	ANAM	HVINJM2068MDTE1
343	···4	9A08163500	IC,NJM4556AL	1	IC78	ANAM	HVINJM4556AL
344	···4	9A08219500	WAFER	1	CN65	ANAM	KJP02GA68ZG
345	···4	9A08563600	SENSOR,REMOCON	1	RC91	ANAM	KRVHIM602H32
346	···4	9A08789600	WAFER , CARD CABLE (21P 1	4	CN14, CN15	ANAM	KJP21GA117ZG
347	···4	9A08789600	WAFER , CARD CABLE (21P 1	1	CN33	ANAM	KJP21GA117ZG
348	···4	9A08877300	BRACKET,FLT	2	BK91, BK92	ANAM	CMD1A374
349	···4	9A08879000	CRYSTAL	1	X901	ANAM	HOX08000E160C
350	···4	9A09035100	RES,CARBON	1	R848	ANAM	CRD25TJ270T
351	···4	9A09256100	JACK,IN/OUT	1	JK22	ANAM	KJJ4S014Z
352	···4	9A09275000	CAP,GOLD	1	C906	ANAM	BCES0HD104
353	···4	9A09278800	JACK,(S-VIDEO+VHS)	1	JK21	ANAM	KJJ9N003Z
354	···4	9A09279500	WAFER, CARD CABLE	1	CN13	ANAM	KJP13GA115ZG
355	···4	9A09285700	FLEXIBLE CONNECTOR(PLUG	2	CN71, CN72	ANAM	BJP26GA133ZK
356	···4	9A09285800	FLEXIBLE CONNECTOR(SOCK	2	BN71, BN72	ANAM	BJP26GB132ZK
357	···4	9A09339900	ENCODER	1	VR91	ANAM	HSR2A015Z
358	···4	9A09340400	IC,FUNCTION	1	IC11	ANAM	HVITC9164AF
359	···4	9A09556200	IC,HVIANAM1351DAT (PRGMD	1	IC91	ANAM	HVIANAM1351DAT
360	···4	9A09559000	JACK,BOARD CJJ4R020Z	2	JK11, JK12	ANAM	CJJ4R020Z
361	···4	9A09563300	BLUE L.E.D	2	D955, D956	ANAM	CVDLEBBL33T0
362	···4	9A09563500	WIRE ASS'Y	1	BN65	ANAM	CWB1C906050EN
363	···4	9A09563700	WIRE ASS'Y	1	BN67	ANAM	CWB1D007070BM
364	···4	9A09571000	F.I.P	1	FIP1	ANAM	KFLHNA11SM28
365	···4	9A09579020	MAIN PCB AUTO ASSY EUR/UI	1		ANAM	CIP11527B
366	····5	9A01387400	TR,KSA733CYT	5	Q241- Q245	ANAM	KVTKSA733CYT
367	····5	9A03745000	TR,KSC2785-YTA	1	Q841	ANAM	KVTKSC2785YT
368	····5	9A05194600	DIODE,1N4003SRT	2	D901, D902	ANAM	KVD1N4003SRT
369	····5	9A05319600	C,CERAMIC 220PF/50V K	7	C211- C217	ANAM	KCBS1H221KBT
370	····5	9A05319600	C,CERAMIC 220PF/50V K	2	C219, C220	ANAM	KCBS1H221KBT
371	····5	9A07874500	RES,CARBON 10 OHM 1/5W	2	R168, R169	ANAM	CRD20TJ100T

372	····5	9A07874500	RES,CARBON 10 OHM 1/5W	1	R906	ANAM	CRD20TJ100T
373	····5	9A07874500	RES,CARBON 10 OHM 1/5W	1	R953	ANAM	CRD20TJ100T
374	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R131, R132	ANAM	CRD20TJ101T
375	····5	9A07874600	RES,CARBON 100 OHM 1/5W	4	R143- R146	ANAM	CRD20TJ101T
376	····5	9A07874600	RES,CARBON 100 OHM 1/5W	4	R721- R724	ANAM	CRD20TJ101T
377	····5	9A07874600	RES,CARBON 100 OHM 1/5W	1	R728	ANAM	CRD20TJ101T
378	····5	9A07874600	RES,CARBON 100 OHM 1/5W	3	R747- R749	ANAM	CRD20TJ101T
379	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R767, R768	ANAM	CRD20TJ101T
380	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R783, R784	ANAM	CRD20TJ101T
381	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R803, R804	ANAM	CRD20TJ101T
382	····5	9A07874600	RES,CARBON 100 OHM 1/5W	1	R831	ANAM	CRD20TJ101T
383	····5	9A07874600	RES,CARBON 100 OHM 1/5W	1	R980	ANAM	CRD20TJ101T
384	····5	9A07874700	RES,CARBON 1K OHM 1/5W	4	R115- R118	ANAM	CRD20TJ102T
385	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R715, R716	ANAM	CRD20TJ102T
386	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R746	ANAM	CRD20TJ102T
387	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R761, R762	ANAM	CRD20TJ102T
388	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R777, R778	ANAM	CRD20TJ102T
389	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R797, R798	ANAM	CRD20TJ102T
390	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R858, R859	ANAM	CRD20TJ102T
391	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R907	ANAM	CRD20TJ102T
392	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R920, R922	ANAM	CRD20TJ102T
393	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R925	ANAM	CRD20TJ102T
394	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R940, R941	ANAM	CRD20TJ102T
395	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R972	ANAM	CRD20TJ102T
396	····5	9A07874800	RES,CARBON 10K OHM 1/5W	2	R705, R706	ANAM	CRD20TJ103T
397	····5	9A07874800	RES,CARBON 10K OHM 1/5W	2	R817, R818	ANAM	CRD20TJ103T
398	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R923	ANAM	CRD20TJ103T
399	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R939	ANAM	CRD20TJ103T
400	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R957	ANAM	CRD20TJ103T
401	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R971	ANAM	CRD20TJ103T
402	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R979	ANAM	CRD20TJ103T
403	····5	9A07874900	RES,CARBON 100K OHM 1/5W	6	R107- R112	ANAM	CRD20TJ104T
404	····5	9A07874900	RES,CARBON 100K OHM 1/5W	4	R119- R122	ANAM	CRD20TJ104T
405	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R127, R128	ANAM	CRD20TJ104T
406	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R133, R134	ANAM	CRD20TJ104T
407	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R151, R152	ANAM	CRD20TJ104T
408	····5	9A07874900	RES,CARBON 100K OHM 1/5W	1	R757	ANAM	CRD20TJ104T
409	····5	9A07875100	RES,CARBON 1.2K OHM 1/5W	1	R963	ANAM	CRD20TJ122T
410	····5	9A07875100	RES,CARBON 1.2K OHM 1/5W	1	R969	ANAM	CRD20TJ122T
411	····5	9A07875200	RES,CARBON 12K OHM	2	R815, R816	ANAM	CRD20TJ123T
412	····5	9A07875200	RES,CARBON 12K OHM	2	R832, R833	ANAM	CRD20TJ123T
413	····5	9A07875200	RES,CARBON 12K OHM	2	R835, R837	ANAM	CRD20TJ123T
414	····5	9A07875200	RES,CARBON 12K OHM	1	R927	ANAM	CRD20TJ123T
415	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R846	ANAM	CRD20TJ152T
416	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R910	ANAM	CRD20TJ152T
417	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R973	ANAM	CRD20TJ152T
418	····5	9A07875500	RES,CARBON 180 OHM 1/5W	2	R955, R956	ANAM	CRD20TJ181T

419	····5	9A07875600	RES,CARBON 1.8K OHM 1/5W	1	R974	ANAM	CRD20TJ182T
420	····5	9A07875700	RES,CARBON 18K OHM 1/5W	2	R759, R760	ANAM	CRD20TJ183T
421	····5	9A07875800	RES,CARBON 2.2K OHM 1/5W	2	R811, R812	ANAM	CRD20TJ222T
422	····5	9A07875800	RES,CARBON 2.2K OHM 1/5W	1	R841	ANAM	CRD20TJ222T
423	····5	9A07875900	RES,CARBON 22K OHM 1/5W	1	R775	ANAM	CRD20TJ223T
424	····5	9A07875900	RES,CARBON 22K OHM 1/5W	2	R795, R796	ANAM	CRD20TJ223T
425	····5	9A07875900	RES,CARBON 22K OHM 1/5W	1	R834	ANAM	CRD20TJ223T
426	····5	9A07875900	RES,CARBON 22K OHM 1/5W	2	R908, R909	ANAM	CRD20TJ223T
427	····5	9A07875900	RES,CARBON 22K OHM 1/5W	1	R911	ANAM	CRD20TJ223T
428	····5	9A07876000	RES,CARBON 220K OHM 1/5W	2	R141, R142	ANAM	CRD20TJ224T
429	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R167	ANAM	CRD20TJ224T
430	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R769	ANAM	CRD20TJ224T
431	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R785	ANAM	CRD20TJ224T
432	····5	9A07876200	RES,CARBON 2.7K OHM	2	R755, R756	ANAM	CRD20TJ272T
433	····5	9A07876200	RES,CARBON 2.7K OHM	2	R961, R962	ANAM	CRD20TJ272T
434	····5	9A07876200	RES,CARBON 2.7K OHM	2	R967, R968	ANAM	CRD20TJ272T
435	····5	9A07876200	RES,CARBON 2.7K OHM	1	R975	ANAM	CRD20TJ272T
436	····5	9A07876400	RES,CARBON 3.3K OHM 1/5W	1	R976	ANAM	CRD20TJ332T
437	····5	9A07876800	RES,CARBON 39K OHM 1/5W	1	R776	ANAM	CRD20TJ393T
438	····5	9A07876900	RES,CARBON 470 OHM 1/5W	6	R101- R106	ANAM	CRD20TJ471T
439	····5	9A07876900	RES,CARBON 470 OHM 1/5W	2	R125, R126	ANAM	CRD20TJ471T
440	····5	9A07876900	RES,CARBON 470 OHM 1/5W	3	R135- R137	ANAM	CRD20TJ471T
441	····5	9A07876900	RES,CARBON 470 OHM 1/5W	2	R153, R154	ANAM	CRD20TJ471T
442	····5	9A07876900	RES,CARBON 470 OHM 1/5W	3	R161- R163	ANAM	CRD20TJ471T
443	····5	9A07876900	RES,CARBON 470 OHM 1/5W	1	R843	ANAM	CRD20TJ471T
444	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R701, R702	ANAM	CRD20TJ472T
445	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R753, R754	ANAM	CRD20TJ472T
446	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R773, R774	ANAM	CRD20TJ472T
447	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R793, R794	ANAM	CRD20TJ472T
448	····5	9A07877100	RES,CARBON 47K OHM 1/5W	1	R712	ANAM	CRD20TJ473T
449	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R717, R718	ANAM	CRD20TJ473T
450	····5	9A07877100	RES,CARBON 47K OHM 1/5W	1	R727	ANAM	CRD20TJ473T
451	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R751, R752	ANAM	CRD20TJ473T
452	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R763, R764	ANAM	CRD20TJ473T
453	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R771, R772	ANAM	CRD20TJ473T
454	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R779, R780	ANAM	CRD20TJ473T
455	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R791, R792	ANAM	CRD20TJ473T
456	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R799, R800	ANAM	CRD20TJ473T
457	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R813, R814	ANAM	CRD20TJ473T
458	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R821, R822	ANAM	CRD20TJ473T
459	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R842, R845	ANAM	CRD20TJ473T
460	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R924, R926	ANAM	CRD20TJ473T
461	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R959, R960	ANAM	CRD20TJ473T
462	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R965, R966	ANAM	CRD20TJ473T
463	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R165, R166	ANAM	CRD20TJ562T
464	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R725, R726	ANAM	CRD20TJ562T
465	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R765, R766	ANAM	CRD20TJ562T

466	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R781, R782	ANAM	CRD20TJ562T
467	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R801, R802	ANAM	CRD20TJ562T
468	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R825, R826	ANAM	CRD20TJ562T
469	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R918, R919	ANAM	CRD20TJ562T
470	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	1	R921	ANAM	CRD20TJ562T
471	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	8	R931- R938	ANAM	CRD20TJ562T
472	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	1	R977	ANAM	CRD20TJ562T
473	····5	9A07877800	RES,CARBON 7.5K OHM ,	1	R978	ANAM	CRD20TJ752T
474	····5	9A07878500	SW,TACT SKHV10910G	8	S971- S978	ANAM	CST1A012ZT
475	····5	9A07880800	CAP,CERAMIC 0.1UF/50V Z	1	C955	ANAM	HCBS1H104ZFT
476	····5	9A07880800	CAP,CERAMIC 0.1UF/50V Z	2	C974, C975	ANAM	HCBS1H104ZFT
477	····5	9A07881200	CAP,CERAMIC 180PF/50V	3	C747- C749	ANAM	HCBS1H181KBT
478	····5	9A07881200	CAP,CERAMIC 180PF/50V	2	C815, C816	ANAM	HCBS1H181KBT
479	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C939	ANAM	HCBS1H181KBT
480	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C954	ANAM	HCBS1H181KBT
481	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C971	ANAM	HCBS1H181KBT
482	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C143, C144	ANAM	HCBS1H223ZFT
483	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	3	C161- C163	ANAM	HCBS1H223ZFT
484	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C168, C169	ANAM	HCBS1H223ZFT
485	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C823, C824	ANAM	HCBS1H223ZFT
486	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C904	ANAM	HCBS1H223ZFT
487	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C937	ANAM	HCBS1H223ZFT
488	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C941, C952	ANAM	HCBS1H223ZFT
489	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C961, C962	ANAM	HCBS1H223ZFT
490	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C965, C966	ANAM	HCBS1H223ZFT
491	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C977, C978	ANAM	HCBS1H223ZFT
492	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C981	ANAM	HCBS1H223ZFT
493	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C842	ANAM	HCEA0JH102T
494	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C905	ANAM	HCEA0JH102T
495	····5	9A07882300	CAP,ELECT 470/10V	10	C221- C230	ANAM	HCEA1AH471T
496	····5	9A07882300	CAP,ELECT 470/10V	1	C247	ANAM	HCEA1AH471T
497	····5	9A07882300	CAP,ELECT 470/10V	1	C846	ANAM	HCEA1AH471T
498	····5	9A07882300	CAP,ELECT 470/10V	1	C903	ANAM	HCEA1AH471T
499	····5	9A07882400	CAP,ELECT 100UF/16V	2	C255, C257	ANAM	HCEA1CH101T
500	····5	9A07882400	CAP,ELECT 100UF/16V	3	C728- C730	ANAM	HCEA1CH101T
501	····5	9A07882400	CAP,ELECT 100UF/16V	1	C745	ANAM	HCEA1CH101T
502	····5	9A07882400	CAP,ELECT 100UF/16V	2	C819, C820	ANAM	HCEA1CH101T
503	····5	9A07882400	CAP,ELECT 100UF/16V	2	C825, C826	ANAM	HCEA1CH101T
504	····5	9A07882400	CAP,ELECT 100UF/16V	1	C908	ANAM	HCEA1CH101T
505	····5	9A07882600	CAP,ELECT 220/16V	1	C845	ANAM	HCEA1CH221T
506	····5	9A07882600	CAP,ELECT 220/16V	1	C848	ANAM	HCEA1CH221T
507	····5	9A07882900	CAP,ELECT 47/16V (S)	2	C737, C738	ANAM	HCEA1CKS100T
508	····5	9A07883000	CAP,ELECT 47/25V	3	C241- C243	ANAM	HCEA1EH470T
509	····5	9A07883000	CAP,ELECT 47/25V	2	C907, C909	ANAM	HCEA1EH470T
510	····5	9A07883000	CAP,ELECT 47/25V	1	C918	ANAM	HCEA1EH470T
511	····5	9A07883500	CAP,ELECT 2.2UF/50V	1	C938	ANAM	HCEA1HH2R2T
512	····5	9A07883800	CAP,ELECT 47/50V	1	C925	ANAM	HCEA1HH470T

513	····5	9A07884100	CAP,ELECT 100/35V	1	C835	ANAM	HCEA1VH101T
514	····5	9A07886600	COIL,AXAIL 10UH	1	L901	ANAM	HLQ02C100KT
515	····5	9A07887900	TR,KSB811YT	1	Q909	ANAM	HVTKSB811YT
516	····5	9A07888000	TR,KSC2316YT	1	Q831	ANAM	HVTKSC2316YT
517	····5	9A07888000	TR,KSC2316YT	1	Q923	ANAM	HVTKSC2316YT
518	····5	9A07894800	RES,CARBON CRD20TJ1R0T	1	R982	ANAM	CRD20TJ1R0T
519	····5	9A07894900	RES,CARBON CRD20TJ221T	1	R958	ANAM	CRD20TJ221T
520	····5	9A07895300	RES,CARBON CRD20TJ331T	7	R729- R735	ANAM	CRD20TJ331T
521	····5	9A07895300	RES,CARBON CRD20TJ331T	6	R852- R857	ANAM	CRD20TJ331T
522	····5	9A07895300	RES,CARBON CRD20TJ331T	1	R954	ANAM	CRD20TJ331T
523	····5	9A07896900	CAP,CERAMIC HCBS1H681KB	2	C208, C209	ANAM	HCBS1H681KBT
524	····5	9A07896900	CAP,CERAMIC HCBS1H681KB	1	C218	ANAM	HCBS1H681KBT
525	····5	9A07897000	CAP,ELECT HCEA1CH471T	2	C131, C132	ANAM	HCEA1CH471T
526	····5	9A07897000	CAP,ELECT HCEA1CH471T	1	C841	ANAM	HCEA1CH471T
527	····5	9A07897000	CAP,ELECT HCEA1CH471T	1	C851	ANAM	HCEA1CH471T
528	····5	9A07897400	CAP,ELECT HCEA1HH0R1T	1	C910	ANAM	HCEA1HH0R1T
529	····5	9A07897700	CAP,ELECT HCEA1HKS1R0T	1	C976	ANAM	HCEA1HKS1R0T
530	····5	9A07898000	CAP,MYLAR HCQI1H153JZT	2	C741, C742	ANAM	HCQI1H153JZT
531	····5	9A07898600	TR,KSD1021YT	1	Q928	ANAM	HVTKSD1021YT
532	····5	9A07901800	RES,CARBON CRD20TJ4R7T	2	R819, R820	ANAM	CRD20TJ4R7T
533	····5	9A07901800	RES,CARBON CRD20TJ4R7T	1	R851	ANAM	CRD20TJ4R7T
534	····5	9A07901900	RES,CARBON CRD20TJ470T	5	R913- R917	ANAM	CRD20TJ470T
535	····5	9A07902900	CAP,CERAMIC 220PF/50V	2	C151, C152	ANAM	HCBS1H221KBT
536	····5	9A07903000	DIODE , ZENER MTZJ7.5A	2	D729, D730	ANAM	HVDMTZJ7.5AT
537	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	2	R703, R704	ANAM	CRD20TJ682T
538	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	5	R707- R711	ANAM	CRD20TJ682T
539	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	1	R719	ANAM	CRD20TJ682T
540	····5	9A08218400	CAP,ELECT A1CKS470T	2	C951, C953	ANAM	HCEA1CKS470T
541	····5	9A08878200	DIODE 1SS133T-77	2	D745, D746	ANAM	HVD1SS133MT
542	····5	9A08878200	DIODE 1SS133T-77	2	D781, D831	ANAM	HVD1SS133MT
543	····5	9A08878200	DIODE 1SS133T-77	2	D832, D837	ANAM	HVD1SS133MT
544	····5	9A08878200	DIODE 1SS133T-77	1	D903	ANAM	HVD1SS133MT
545	····5	9A08878200	DIODE 1SS133T-77	2	D907, D909	ANAM	HVD1SS133MT
546	····5	9A08878200	DIODE 1SS133T-77	3	D911- D913	ANAM	HVD1SS133MT
547	····5	9A08905400	CAP,CERAMIC S1H821KBT	7	C201- C207	ANAM	HCBS1H821KBT
548	····5	9A08905400	CAP,CERAMIC S1H821KBT	1	C210	ANAM	HCBS1H821KBT
549	····5	9A08905400	CAP,CERAMIC S1H821KBT	2	C231, C232	ANAM	HCBS1H821KBT
550	····5	9A08905600	CAP,ELECT A1VH100T	2	C145, C146	ANAM	HCEA1VH100T
551	····5	9A08905600	CAP,ELECT A1VH100T	1	C712	ANAM	HCEA1VH100T
552	····5	9A08905600	CAP,ELECT A1VH100T	2	C715, C716	ANAM	HCEA1VH100T
553	····5	9A08905600	CAP,ELECT A1VH100T	1	C727	ANAM	HCEA1VH100T
554	····5	9A08905600	CAP,ELECT A1VH100T	2	C751, C752	ANAM	HCEA1VH100T
555	····5	9A08905600	CAP,ELECT A1VH100T	2	C761, C762	ANAM	HCEA1VH100T
556	····5	9A08905600	CAP,ELECT A1VH100T	2	C771, C772	ANAM	HCEA1VH100T
557	····5	9A08905600	CAP,ELECT A1VH100T	2	C777, C778	ANAM	HCEA1VH100T
558	····5	9A08905600	CAP,ELECT A1VH100T	2	C791, C792	ANAM	HCEA1VH100T
559	····5	9A08905600	CAP,ELECT A1VH100T	2	C797, C798	ANAM	HCEA1VH100T

560	····5	9A08905600	CAP,ELECT A1VH100T	2	C811, C812	ANAM	HCEA1VH100T
561	····5	9A08955200	RES,CARBON 20TJ622T	2	R713, R714	ANAM	CRD20TJ622T
562	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C759, C760	ANAM	CCCT1H470JC
563	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C775, C776	ANAM	CCCT1H470JC
564	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C795, C796	ANAM	CCCT1H470JC
565	····5	9A09336600	CAP,CERAMIC T1H103ZF	4	C721- C724	ANAM	CCKT1H103ZF
566	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C765	ANAM	CCKT1H103ZF
567	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C767, C768	ANAM	CCKT1H103ZF
568	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C781	ANAM	CCKT1H103ZF
569	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C783, C784	ANAM	CCKT1H103ZF
570	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C801	ANAM	CCKT1H103ZF
571	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C803, C804	ANAM	CCKT1H103ZF
572	····5	9A09336800	CAP,CERAMIC T1H151KB	6	C107- C112	ANAM	CCKT1H151KB
573	····5	9A09336800	CAP,CERAMIC T1H151KB	4	C119- C122	ANAM	CCKT1H151KB
574	····5	9A09336800	CAP,CERAMIC T1H151KB	2	C127, C128	ANAM	CCKT1H151KB
575	····5	9A09336900	CAP,CERAMIC T1H181KB	1	C711	ANAM	CCKT1H181KB
576	····5	9A09336900	CAP,CERAMIC T1H181KB	2	C713, C714	ANAM	CCKT1H181KB
577	····5	9A09336900	CAP,CERAMIC T1H181KB	3	C733- C735	ANAM	CCKT1H181KB
578	····5	9A09336900	CAP,CERAMIC T1H181KB	1	C757	ANAM	CCKT1H181KB
579	····5	9A09336900	CAP,CERAMIC T1H181KB	4	C854- C857	ANAM	CCKT1H181KB
580	····5	9A09337300	CAP,CERAMIC T1H471KB	3	C135- C137	ANAM	CCKT1H471KB
581	····5	9A09344300	CAP,CERAMIC S1H470JT	2	C813, C814	ANAM	HCBS1H470JT
582	····5	9A09344300	CAP,CERAMIC S1H470JT	5	C913- C917	ANAM	HCBS1H470JT
583	····5	9A09344400	L.E.D , YELLOW	1	D958	ANAM	HVD342YCTB7T089
584	····5	9A09557200	CAP,CERAMIC T1H104ZF	1	C746	ANAM	CCKT1H104ZF
585	····5	9A09570800	CAP,FILM E1J334JBT	2	C743, C744	ANAM	KCFE1J334JBT
586	····5	9A09579100	MAIN PCB	1		ANAM	CUP11527Y
587	····5	9A09600900	CAP,MYLAR I1H822JZT	1	C726	ANAM	HCQI1H822JZT
588	····5	9A09600900	CAP,MYLAR I1H822JZT	2	C739, C740	ANAM	HCQI1H822JZT
589	····5	9A09604700	TR,KRA102MT	1	Q167	ANAM	HVTKRA102MT
590	····5	9A09604700	TR,KRA102MT	1	Q247	ANAM	HVTKRA102MT
591	····5	9A09604700	TR,KRA102MT	2	Q726, Q745	ANAM	HVTKRA102MT
592	····5	9A09604700	TR,KRA102MT	2	Q835, Q836	ANAM	HVTKRA102MT
593	····5	9A09604700	TR,KRA102MT	1	Q917	ANAM	HVTKRA102MT
594	····5	9A09604700	TR,KRA102MT	2	Q924, Q927	ANAM	HVTKRA102MT
595	····5	9A09604700	TR,KRA102MT	2	Q938, Q953	ANAM	HVTKRA102MT
596	····5	9A09604900	TR,KRC102MT	1	Q246	ANAM	HVTKRC102MT
597	····5	9A09604900	TR,KRC102MT	2	Q248, Q255	ANAM	HVTKRC102MT
598	····5	9A09604900	TR,KRC102MT	2	Q833, Q834	ANAM	HVTKRC102MT
599	····5	9A09604900	TR,KRC102MT	2	Q837, Q838	ANAM	HVTKRC102MT
600	····5	9A09604900	TR,KRC102MT	1	Q845	ANAM	HVTKRC102MT
601	····5	9A09604900	TR,KRC102MT	1	Q918	ANAM	HVTKRC102MT
602	····5	9A09604900	TR,KRC102MT	2	Q932, Q933	ANAM	HVTKRC102MT
603	····5	9A09604900	TR,KRC102MT	2	Q937, Q939	ANAM	HVTKRC102MT
604	····5	9A09604900	TR,KRC102MT	2	Q954, Q955	ANAM	HVTKRC102MT
605	····5	9A09604900	TR,KRC102MT	2	Q957, Q958	ANAM	HVTKRC102MT
606	····5	9A09612400	RES,CARBON 20TJ270T	2	R823, R824	ANAM	CRD20TJ270T

607	····5	9A09613400	CAP , CERAMIC	2	C901, C902	ANAM	HCBS1H180JT
608	····5	9A09613900	COIL	9	L201- L209	ANAM	HLQ02C1R8KT
609	····5	9A09616000	TR,MUTE	2	Q165, Q166	ANAM	HVTKTC2874BT
610	····5	9A09616000	TR,MUTE	1	Q725	ANAM	HVTKTC2874BT
611	····5	9A09616000	TR,MUTE	2	Q765, Q766	ANAM	HVTKTC2874BT
612	····5	9A09616000	TR,MUTE	2	Q781, Q782	ANAM	HVTKTC2874BT
613	····5	9A09616000	TR,MUTE	2	Q801, Q802	ANAM	HVTKTC2874BT
614	····5	9A09616000	TR,MUTE	2	Q825, Q826	ANAM	HVTKTC2874BT
615	···4	9A09604000	IC,VOLUME	1	IC73	ANAM	HVIM62446AFP
616	···4	9A09604100	IC,EXPANDER	1	IC74	ANAM	HVINJU3713G
617	···4	9A09606100	WAFER	1	CN11	ANAM	KJP15GA98ZM
618	···4	9A09606100	WAFER	1	CN21	ANAM	KJP15GA98ZM
619	···4	9A09606200	WAFER	1	BN11	ANAM	KJP15GB99ZM
620	···4	9A09606200	WAFER	1	BN21	ANAM	KJP15GB99ZM
621	···4	9A09608000	PLATE,EARTH	1		ANAM	CMC1A111
622	···4	9A09614600	VR , ENCODER	1	VR92	ANAM	HSR2A018Z
623	···4	9A09614800	IC,VIDEO SWITCH	1	IC21	ANAM	HVIBA7609F
624	···4	9A09615900	T.R	2	Q842, Q846	ANAM	HVTKSB1151Y
625	···4	9A09616500	WAFER, CARD CABLE	1	CN10	ANAM	KJP25GA117ZG
626	··3	9A09595700	INSULATOR,CABLE	1		ANAM	CMX1A138
627	··3	9A09596300	LABEL,FUSE CAUTION	1		ANAM	CQB1A173Z
628	··3	9A09598300	SCREW	2		ANAM	CTB3+8F
629	··3	9A09601800	FAN,MOTOR	1		ANAM	HDMF410T12L1C01
630	··3	9A09607200	CUSHION	2		ANAM	CHG1A218
631	··3	9A09607900	FERRITE,RING	1		ANAM	CLZ9W003Z
632	··3	9A09609400	FOOT	4		ANAM	HKL1A074Z
633	··3	9A09611200	CUSHION,MECHA	2		ANAM	CHG1A239
634	··3	9A09611420	REAR PANEL	1		ANAM	CKF1A238Z
635	··3	9A09611500	BRACKET,PCB	1		ANAM	CMD1A395
636	··3	9A09611700	INSULATOR,SMPS	1		ANAM	CMX2A133
637	··3	9A09611820	MODULE,TUNER	1		ANAM	CNVMV114MA1-17
638	··3	9A09611920	SMPS PCB ASS'Y EUR	1		ANAM	COPDDS115A
639	···4	9A09612720	PCB,SMPS	1		ANAM	CUPDDS115A
640	··3	9A09612600	CHAASIS,BOTTOM	1		ANAM	CUA2A216
641	··3	9A09612900	CARD CABLE	3		ANAM	CWC1B4A21A100B6
642	··3	9A09613000	CABLE,CARD	1		ANAM	CWC1C4A13B080B
643	··3	9A09616700	SHIELD,CUSHION	1		ANAM	KMC1A196
644	·2	9A09598400	SCREW	2		ANAM	CTB4+6FFC
645	·2	9A09607700	TOP CABINET	1		ANAM	CKC1B131S35
646	1	9A09579220	INSTRUCTION MNL ASSY EUR	1		ANAM	CQXDRL700EURCC
647	·2	9A06752300	STAPLE 0905	3		ANAM	KPL0905
648	·2	9A08125700	BAG,POLY	2		ANAM	CPB1061Y
649	·2	9A09055200	BATTERY	2		ANAM	HABAAM1.5V
650	·2	9A09478500	OWN MNL,EFS-EUR DR-L700	1		ANAM	CQX1A791Z
651	·2	9A09478600	OWNER'S MNL,GIN DR-L700	1		ANAM	CQX1A791Y
652	·2	9A09562100	AM LOOP ANT	1		ANAM	CSA1A020Z
653	·2	9A09572700	FM 1 POLE ANT	1		ANAM	CSA1A018Z

654	·2	9A09610220	REMOCON ASS'Y EUR	1		ANAM	CARTDRL700EUR
655	·2	9A09611300	CORD.PIN (1P)	1		ANAM	CJS4M023Z
656	1	9A09596600	LABEL,DTS	1		ANAM	CQB1A582Z
657	1	9A09608300	PAD,SNOW(L)	1		ANAM	CPS1A579
658	1	9A09608400	PAD,SNOW(R)	1		ANAM	CPS1A580
659	1	9A09612000	BOX,OUT CARTON	1		ANAM	CPG1A689Z
660	1	9A09612100	PAD,GUIDE	1		ANAM	CPG1A715
661	1	9A09612220	CODE,RESION EUR,UK	2		ANAM	CQE1A183Z
662	1	9A09612300	LABEL,CLASS1 LASER	1		ANAM	CQX1A293Z
663	1	9A05326600	CLAMPER,ARM	1		ANAM	KHE154
664	1	9A05335600	LABEL,SERIAL NO	2		ANAM	KQT1A046
665	1	9A05983800	TAPE,OPP CLEAR 50M/M	1		ANAM	K4FC500CL
666	1	9A06751300	STAPLE 6500	8		ANAM	KPL6500
667	1	9A07005300	TAPE,P.P	1		ANAM	K4FC240CL
668	1	9A07052700	RIBON,BAR CODE	1		ANAM	KQS1A001
669	1	9A07874100	BAG,POLY(SET) H-100	1		ANAM	CPP1A082Z
670	1	9A09561300	LABEL,BAR CODE	2		ANAM	CQT1A144

	LEVEL	PARTS NO.	DESCRIPTION	Q'TY	REF NO.	MFR	OEM NO.
1	1	9A09577930	SET,DVD RECEIVER UK	1		ANAM	DR-L700UKCCSET
2	·2	9A09562500	SCREW	4		ANAM	CTVD3+8JFZ
3	·2	9A09578030	FRONT PANEL ASSY UK	1		ANAM	CGWDRL700UKCC
4	··3	9A09331900	SCREW,CTB3+10G	7		ANAM	CTB3+10G
5	··3	9A09594600	WINDOW,SENSOR	1		ANAM	CGU1A287A14K101
6	··3	9A09598500	SCREW	9		ANAM	CTS3+10J
7	··3	9A09606800	SPRING,VOLUME	1		ANAM	KUS1A132
8	··3	9A09610300	KNOB,RDS(DIFFUSION)	1		ANAM	CBT1A838RAYK101
9	··3	9A09610400	KNOB,POWER(DIFFUSION)	1		ANAM	CBT1A838RAZK101
10	··3	9A09610500	KNOB,BAND	1		ANAM	CBT1A839C22
11	··3	9A09610600	KNOB,RDS	1		ANAM	CBY1A027RA
12	··3	9A09610700	KNOB,POWER	1		ANAM	CBY1A028RA
13	··3	9A09610800	KNOB,POWER(LIGHTING)	2		ANAM	CBY1A029
14	··3	9A09611000	DOOR,DVD	1		ANAM	CGR1A276M7ZK101
15	··3	9A09611100	PANEL,MOLD	1		ANAM	CGW1A343R6K101
16	··3	9A09615600	WINDOW,FIP	1		ANAM	KGU1A288Z
17	··3	9A09616300	VOLUME KNOB ASS'Y	2		ANAM	KGK1A079ZA
18	···4	9A09616100	KNOB,VOLUME(MOLD)	1		ANAM	KBN1A161
19	···4	9A09616200	KNOB,VOLUME(AL)	1		ANAM	KGK1A079C21
20	··3	9A09616620	PANEL,FRONT(AL)	1		ANAM	KKM1A124ZC35
21	·2	9A09578130	BOTTOM CHASSIS ASSY UK	1		ANAM	CUADRL700UKCC
22	··3	9A05327300	CLAMPER KHR301	4		ANAM	KHR301
23	··3	9A06053500	TAPE,FILAMENT	1		ANAM	K4FE190
24	··3	9A06066300	COMPOUND,SILICONE	1		ANAM	K8AYG6260
25	··3	9A06229300	CUSHION,FOOT	4		ANAM	KHG1A039Z
26	··3	9A06318700	LOCKER	4		ANAM	KRE1A037
27	··3	9A06754900	BUSHING,AC CORD	1		ANAM	KHR1A028
28	··3	9A07916800	CORD,POWER 2.5A 250V UK	1		ANAM	CJA2E045Z
29	··3	9A08885700	RUBBER	2		ANAM	CHG1A113
30	··3	9A09330500	SCREW,CTB3+10GFZ	12		ANAM	CTB3+10GFZ
31	··3	9A09330700	SCREW,CTB3+8JFZ	1		ANAM	CTB3+8JFZ
32	··3	9A09333000	SCREW,CTW3+8J	7		ANAM	CTW3+8J
33	··3	9A09338300	SCREW	14		ANAM	CTB3+6J
34	··3	9A09343900	SCREW	2		ANAM	CTW3+14J
35	··3	9A09561500	STICKER,CAUTION	1		ANAM	CQX1A294Z
36	··3	9A09562200	SCREW,DOT	1		ANAM	CTBD3+10JFC
37	··3	9A09578220	MECHANISM ASSY EUR	1		ANAM	CJDDRL700EUR
38	···4	9A09578310	DVD MAIN PCB SMD ASSY T/C	1		ANAM	CIP11538BSMD
39	····5	9A09256400	40P HEADER (ANGLE TYPE)	1	CN12	ANAM	KJP40GB80ZP
40	····5	9A09564800	CAP,CHIP ELECT	1	C124	ANAM	HCEC0JRV2101T
41	····5	9A09564800	CAP,CHIP ELECT	1	C173	ANAM	HCEC0JRV2101T
42	····5	9A09564800	CAP,CHIP ELECT	1	C188	ANAM	HCEC0JRV2101T
43	····5	9A09564800	CAP,CHIP ELECT	1	C285	ANAM	HCEC0JRV2101T
44	····5	9A09564800	CAP,CHIP ELECT	1	C324	ANAM	HCEC0JRV2101T
45	····5	9A09565000	CAP,CHIP ELECT C0JRV2470T	2	C103, C111	ANAM	HCEC0JRV2470T
46	····5	9A09565000	CAP,CHIP ELECT C0JRV2470T	2	C238, C239	ANAM	HCEC0JRV2470T

47	····5	9A09565000	CAP,CHIP ELECT C0JRV2470T	1	C248	ANAM	HCEC0JRV2470T
48	····5	9A09565000	CAP,CHIP ELECT C0JRV2470T	1	C317	ANAM	HCEC0JRV2470T
49	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C101, C102	ANAM	HCUS1E104ZF
50	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C112, C114	ANAM	HCUS1E104ZF
51	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C123	ANAM	HCUS1E104ZF
52	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C129, C130	ANAM	HCUS1E104ZF
53	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C143, C145	ANAM	HCUS1E104ZF
54	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C150	ANAM	HCUS1E104ZF
55	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C155, C156	ANAM	HCUS1E104ZF
56	····5	9A09565600	CAP,CHIP, 0.1UF ZF	4	C158- C161	ANAM	HCUS1E104ZF
57	····5	9A09565600	CAP,CHIP, 0.1UF ZF	4	C164- C168	ANAM	HCUS1E104ZF
58	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C179	ANAM	HCUS1E104ZF
59	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C191	ANAM	HCUS1E104ZF
60	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C227, C228	ANAM	HCUS1E104ZF
61	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C236	ANAM	HCUS1E104ZF
62	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C244	ANAM	HCUS1E104ZF
63	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C259, C261	ANAM	HCUS1E104ZF
64	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C287	ANAM	HCUS1E104ZF
65	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C316	ANAM	HCUS1E104ZF
66	····5	9A09565600	CAP,CHIP, 0.1UF ZF	1	C318	ANAM	HCUS1E104ZF
67	····5	9A09565600	CAP,CHIP, 0.1UF ZF	2	C322, C323	ANAM	HCUS1E104ZF
68	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	4	BD05- BD08	ANAM	HRJ10DJ0R0T
69	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R207, R208	ANAM	HRJ10DJ0R0T
70	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R253	ANAM	HRJ10DJ0R0T
71	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R257, R258	ANAM	HRJ10DJ0R0T
72	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R278	ANAM	HRJ10DJ0R0T
73	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R283	ANAM	HRJ10DJ0R0T
74	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R333	ANAM	HRJ10DJ0R0T
75	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R342	ANAM	HRJ10DJ0R0T
76	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	1	R349	ANAM	HRJ10DJ0R0T
77	····5	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R367, R373	ANAM	HRJ10DJ0R0T
78	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R117, R118	ANAM	HRJ10DJ100T
79	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R125, R126	ANAM	HRJ10DJ100T
80	····5	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R203	ANAM	HRJ10DJ100T
81	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R116	ANAM	HRJ10DJ102T
82	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R172	ANAM	HRJ10DJ102T
83	····5	9A09567600	RES,CHIP(1/10W),1K OHM J	1	R249	ANAM	HRJ10DJ102T
84	····5	9A09567700	RES,CHIP 10DJ103T	1	R171	ANAM	HRJ10DJ103T
85	····5	9A09567700	RES,CHIP 10DJ103T	5	R173- R177	ANAM	HRJ10DJ103T
86	····5	9A09567800	RES,CHIP 10DJ104T	1	R307	ANAM	HRJ10DJ104T
87	····5	9A09568200	RES,CHIP(1/10W) 10DJ221T	1	R115	ANAM	HRJ10DJ221T
88	····5	9A09568200	RES,CHIP(1/10W) 10DJ221T	1	R280	ANAM	HRJ10DJ221T
89	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	1	R121	ANAM	HRJ10DJ473T
90	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	1	R127	ANAM	HRJ10DJ473T
91	····5	9A09569000	RES,CHIP(1/10W),47K OHM J	4	R154- R157	ANAM	HRJ10DJ473T
92	····5	9A09569500	RES,CHIP(1/10W) 75 OHM J	2	R351, R366	ANAM	HRJ10DJ750T
93	····5	9A09578400	DVD MAIN PCB	0,5		ANAM	CUP11538Z
94	····5	9A09601300	CAP,CHIP 150PF JA	1	C163	ANAM	HCUS1H151JA
95	····5	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R222, R223	ANAM	HRJ10DJ101T
96	····5	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R225	ANAM	HRJ10DJ101T

97	····5	9A09602500	RES,CHIP (1/10W)	1	R178	ANAM	HRJ10DJ121T
98	····5	9A09602500	RES,CHIP (1/10W)	1	R339	ANAM	HRJ10DJ121T
99	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	1	R153	ANAM	HRJ10DJ330T
100	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R193, R194	ANAM	HRJ10DJ330T
101	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	1	R201	ANAM	HRJ10DJ330T
102	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R301, R306	ANAM	HRJ10DJ330T
103	····5	9A09602900	RES,CHIP (1/10W) 33 OHM J	2	R381, R382	ANAM	HRJ10DJ330T
104	····5	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R309	ANAM	HRJ10DJ331T
105	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R107	ANAM	HRJ10DJ472T
106	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R120	ANAM	HRJ10DJ472T
107	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	5	R158- R162	ANAM	HRJ10DJ472T
108	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R170	ANAM	HRJ10DJ472T
109	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	3	R197- R200	ANAM	HRJ10DJ472T
110	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R228	ANAM	HRJ10DJ472T
111	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R251, R252	ANAM	HRJ10DJ472T
112	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	3	R262- R264	ANAM	HRJ10DJ472T
113	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	8	R311- R318	ANAM	HRJ10DJ472T
114	····5	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R374, R375	ANAM	HRJ10DJ472T
115	····5	9A09603200	RES,CHIP 10DJ680T	1	R256	ANAM	HRJ10DJ680T
116	····5	9A09603200	RES,CHIP 10DJ680T	1	R259	ANAM	HRJ10DJ680T
117	····5	9A09603200	RES,CHIP 10DJ680T	2	R344, R346	ANAM	HRJ10DJ680T
118	····5	9A09613500	CAP,ELEC (SMD)	2	C222, C223	ANAM	HCEC1CRV2100T
119	····5	9A09613500	CAP,ELEC (SMD)	3	C233- C235	ANAM	HCEC1CRV2100T
120	····5	9A09613600	CAP,CHIP 27PF JA	2	C297, C298	ANAM	HCUS1H270JA
121	····5	9A09614200	CRYSTAL,CHIP(27MHZ,SMD)	1	X102	ANAM	HOX27000E180S
122	····5	9A09614300	RES,CHIP (1/10W)	1	R101	ANAM	HRJ10DJ361T
123	····5	9A09614500	RES,4ARRAY	12	RN01- RN12	ANAM	HRJ104DJ330T
124	····5	9A09614500	RES,4ARRAY	2	RN14, RN15	ANAM	HRJ104DJ330T
125	····5	9A09614700	DIODE,SCHOTTKEY BARRIER	1	D101	ANAM	HVDRB160L60TE25
126	····5	9A09614800	IC,VIDEO SWITCH	1	IC05	ANAM	HVIBA7609F
127	····5	9A09614900	VIDEO AMP	2	IC16, IC19	ANAM	HVIBA7622F
128	····5	9A09615000	IC,EEPROM(16K)	1	IC13	ANAM	HVIBR24C16F
129	····5	9A09615100	IC,I2C BUS	1	IC15	ANAM	HVIBU2098F
130	····5	9A09615200	DVD MPEG DECODER IC	1	IC01	ANAM	HVIES6028F
131	····5	9A09615300	IC,FLASH MEMORY	1	IC03	ANAM	HVIHY29F800BT90
132	····5	9A09615400	IC,64MSDRAM	1	IC10	ANAM	HVIHY57V641620D
133	····5	9A09615500	IC,ADJ REGULATOR	1	IC09	ANAM	HVIRC1117ST
134	····5	9A09615800	IC,INVERTER	1	IC07	ANAM	HVI74VHC04MX
135	····5	9A09616500	WAFER, CARD CABLE	1	CN10	ANAM	KJP25GA117ZG
136	···4	9A09608000	PLATE,EARTH	1		ANAM	CMC1A111
137	···4	9A09611600	INSULATOR , MECHA	1		ANAM	CMX1A137
138	···4	9A09613100	CARD CABLE (SHIELD)	1		ANAM	CWC3B2A25A150B6
139	···4	9A09613200	WIRE ASS'Y	1		ANAM	CWZDR700BN47
140	···4	9A09613300	CABLE,ATAPI(FLATE,40P)	1		ANAM	CWZHTS5000BN12
141	···4	9A096137001	DVD MECHANISM (HD3 P/U)	1		ANAM	HJDRL-A700HD3
142	··3	9A09578510	AMP PCB ASSY	1		ANAM	COP11526B
143	···4	9A06066300	COMPOUND,SILICONE	1		ANAM	K8AYG6260
144	···4	9A07050600	BEAD,CORE	4	BD51- BD54	ANAM	KLZ9H001Z
145	···4	9A07050600	BEAD,CORE	1	BD56	ANAM	KLZ9H001Z
146	···4	9A07884200	CAP,ELECT 1000/35V	1	C564	ANAM	HCEA1VH102E

147	···4	9A07889800	CONNECTOR MOLEX35237-061	1	BN31	ANAM	KJP06GB99ZM
148	···4	9A08036700	WAFER	1	BN51	ANAM	KJP10GB99ZM
149	···4	9A08126500	MODULE,OPTICAL	1	JK33	ANAM	HJS9L001Z
150	···4	9A08789600	WAFER , CARD CABLE (21P 1	1	CN33	ANAM	KJP21GA117ZG
151	···4	9A09058500	RELAY	1	RY51	ANAM	HSL4A010ZU
152	···4	9A09330600	SCREW,CTB3+8J	2		ANAM	CTB3+8J
153	···4	9A09558800	JACK,INPUT(1PIN,GOLD PLAT	1	JK31	ANAM	CJJ4M042Z
154	···4	9A09559100	TERMINAL,SPEAKER	1	JK51	ANAM	CJJ5P012Z
155	···4	9A09559500	COIL,SPEAKER	4	L541- L544	ANAM	CLZ9Z011Z
156	···4	9A09559700	BRACKET , PCB	1	BK51	ANAM	CMD1A387
157	···4	9A09564400	WIRE ASS'Y	1	JW51	ANAM	CWE8202110RV
158	···4	9A09569900	RELAY	1	RY52	ANAM	HSL1A008ZE
159	···4	9A09570600	IC,DIGITAL AMP.	1	IC52	ANAM	HVITP2050
160	···4	9A09571700	RES,METAL OXIDE FILM	1	R598	ANAM	KRG2ANJ102H
161	···4	9A09578610	AMP PCB AUTO ASSY	1		ANAM	CIP11526B
162	····5	9A05194700	DIODE,1N4003ST	1	D355	ANAM	KVD1N4003ST
163	····5	9A05896200	R.,100-OHM,1/4W	1	R561	ANAM	KRD25FJ101T
164	····5	9A06234200	R,CARBON 25FJ151T	2	R566, R567	ANAM	KRD25FJ151T
165	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C351	ANAM	HCEA0JH102T
166	····5	9A07882300	CAP,ELECT 470/10V	1	C353	ANAM	HCEA1AH471T
167	····5	9A07882300	CAP,ELECT 470/10V	1	C533	ANAM	HCEA1AH471T
168	····5	9A07882300	CAP,ELECT 470/10V	1	C565	ANAM	HCEA1AH471T
169	····5	9A07882400	CAP,ELECT 100UF/16V	1	C335	ANAM	HCEA1CH101T
170	····5	9A07882400	CAP,ELECT 100UF/16V	2	C341, C344	ANAM	HCEA1CH101T
171	····5	9A07882400	CAP,ELECT 100UF/16V	2	C354, C355	ANAM	HCEA1CH101T
172	····5	9A07882400	CAP,ELECT 100UF/16V	1	C373	ANAM	HCEA1CH101T
173	····5	9A07883000	CAP,ELECT 47/25V	2	C312, C315	ANAM	HCEA1EH470T
174	····5	9A07883000	CAP,ELECT 47/25V	1	C337	ANAM	HCEA1EH470T
175	····5	9A07883000	CAP,ELECT 47/25V	2	C563, C568	ANAM	HCEA1EH470T
176	····5	9A07883500	CAP,ELECT 2.2UF/50V	1	C374	ANAM	HCEA1HH2R2T
177	····5	9A07883500	CAP,ELECT 2.2UF/50V	2	C503, C504	ANAM	HCEA1HH2R2T
178	····5	9A07885500	CAP,MYLAR 0.01UF/50V	1	C378	ANAM	HCQI1H103JZT
179	····5	9A07888000	TR,KSC2316YT	2	Q354, Q563	ANAM	HVTKSC2316YT
180	····5	9A07898400	DIODE,ZENER ZJ5.6BT	1	D564	ANAM	HVDMTZJ5.6BT
181	····5	9A08218800	CAP,FILM 0.1UF 63V J	8	C543- C550	ANAM	KCFE1J104JBT
182	····5	9A08878200	DIODE 1SS133T-77	2	D541, D561	ANAM	HVD1SS133MT
183	····5	9A08905600	CAP,ELECT A1VH100T	2	C303, C304	ANAM	HCEA1VH100T
184	····5	9A08905600	CAP,ELECT A1VH100T	2	C401, C402	ANAM	HCEA1VH100T
185	····5	9A08905600	CAP,ELECT A1VH100T	2	C411, C412	ANAM	HCEA1VH100T
186	····5	9A08905600	CAP,ELECT A1VH100T	2	C421, C422	ANAM	HCEA1VH100T
187	····5	9A08905600	CAP,ELECT A1VH100T	2	C431, C432	ANAM	HCEA1VH100T
188	····5	9A08905600	CAP,ELECT A1VH100T	2	C441, C442	ANAM	HCEA1VH100T
189	····5	9A08905600	CAP,ELECT A1VH100T	2	C451, C452	ANAM	HCEA1VH100T
190	····5	9A09561900	RES,CARBON 25TJ6R2T	2	R543, R544	ANAM	CRD25TJ6R2T
191	····5	9A09561900	RES,CARBON 25TJ6R2T	2	R547, R548	ANAM	CRD25TJ6R2T
192	····5	9A09570700	RES,SEMI FIXED(4.7K OHM)	2	VR51, VR52	ANAM	HVN1RA472B01T
193	····5	9A09570900	CAP,FILM(POLYESTER)	2	C551, C552	ANAM	KCFE1J474JBT
194	····5	9A09571600	RES,METAL FILM	2	R541, R542	ANAM	KRG14F2R01T
195	····5	9A09578710	AMP PCB SMD ASSY	1		ANAM	CIP11526BSMD
196	·····6	9A08163400	IC,OP AMP NJM2068MD	1	IC31	ANAM	HVINJM2068MDTE1

197	6	9A08163400	IC,OP AMP NJM2068MD	3	IC41- IC43	ANAM	HVINJM2068MDTE1
198	6	9A09565400	CAP,CHIP 1UF TANTAL	2	C536, C537	ANAM	HCSGA1V1R0B
199	6	9A09565500	CAP,CHIP P2A104KC	2	C531, C532	ANAM	HCUP2A104KC
200	6	9A09565500	CAP,CHIP P2A104KC	2	C534, C535	ANAM	HCUP2A104KC
201	6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C307, C308	ANAM	HCUS1E104ZF
202	6	9A09565600	CAP,CHIP, 0.1UF ZF	1	C327	ANAM	HCUS1E104ZF
203	6	9A09565600	CAP,CHIP, 0.1UF ZF	1	C336	ANAM	HCUS1E104ZF
204	6	9A09565600	CAP,CHIP, 0.1UF ZF	3	C338- C340	ANAM	HCUS1E104ZF
205	6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C345, C348	ANAM	HCUS1E104ZF
206	6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C352, C356	ANAM	HCUS1E104ZF
207	6	9A09565600	CAP,CHIP, 0.1UF ZF	1	C359	ANAM	HCUS1E104ZF
208	6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C372, C375	ANAM	HCUS1E104ZF
209	6	9A09565600	CAP,CHIP, 0.1UF ZF	1	C379	ANAM	HCUS1E104ZF
210	6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C415, C416	ANAM	HCUS1E104ZF
211	6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C435, C436	ANAM	HCUS1E104ZF
212	6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C455, C456	ANAM	HCUS1E104ZF
213	6	9A09565600	CAP,CHIP, 0.1UF ZF	3	C505- C507	ANAM	HCUS1E104ZF
214	6	9A09565600	CAP,CHIP, 0.1UF ZF	6	C525- C530	ANAM	HCUS1E104ZF
215	6	9A09565600	CAP,CHIP, 0.1UF ZF	2	C566, C567	ANAM	HCUS1E104ZF
216	6	9A09565700	CAP,CHIP S1H101JA	2	C301, C302	ANAM	HCUS1H101JA
217	6	9A09565700	CAP,CHIP S1H101JA	1	C311	ANAM	HCUS1H101JA
218	6	9A09565700	CAP,CHIP S1H101JA	4	C323- C326	ANAM	HCUS1H101JA
219	6	9A09565700	CAP,CHIP S1H101JA	7	C328- C334	ANAM	HCUS1H101JA
220	6	9A09565700	CAP,CHIP S1H101JA	2	C342, C343	ANAM	HCUS1H101JA
221	6	9A09565700	CAP,CHIP S1H101JA	2	C357, C358	ANAM	HCUS1H101JA
222	6	9A09565700	CAP,CHIP S1H101JA	3	C369- C371	ANAM	HCUS1H101JA
223	6	9A09565800	CAP,CHIP S1H103KC	6	C553- C558	ANAM	HCUS1H103KC
224	6	9A09566200	CAP,CHIP S1H271JA	4	C513- C516	ANAM	HCUS1H271JA
225	6	9A09566300	CAP,CHIP S1H331JA	2	C541, C542	ANAM	HCUS1H331JA
226	6	9A09566600	CAP,CHIP S1H471JA	1	C377	ANAM	HCUS1H471JA
227	6	9A09566600	CAP,CHIP S1H471JA	2	C413, C414	ANAM	HCUS1H471JA
228	6	9A09566600	CAP,CHIP S1H471JA	1	C426	ANAM	HCUS1H471JA
229	6	9A09566600	CAP,CHIP S1H471JA	2	C433, C434	ANAM	HCUS1H471JA
230	6	9A09566600	CAP,CHIP S1H471JA	2	C453, C454	ANAM	HCUS1H471JA
231	6	9A09566600	CAP,CHIP S1H471JA	2	C501, C502	ANAM	HCUS1H471JA
232	6	9A09566800	CAP,CHIP S1H473ZF	2	C561, C562	ANAM	HCUS1H473ZF
233	6	9A09567400	RES,CHIP(1/10W) 10DJ0R0T	2	R599, R600	ANAM	HRJ10DJ0R0T
234	6	9A09567500	RES,CHIP(1/10W),10 OHM J	4	R312- R315	ANAM	HRJ10DJ100T
235	6	9A09567500	RES,CHIP(1/10W),10 OHM J	5	R323- R327	ANAM	HRJ10DJ100T
236	6	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R336, R340	ANAM	HRJ10DJ100T
237	6	9A09567500	RES,CHIP(1/10W),10 OHM J	3	R344- R346	ANAM	HRJ10DJ100T
238	6	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R348	ANAM	HRJ10DJ100T
239	6	9A09567500	RES,CHIP(1/10W),10 OHM J	2	R373, R374	ANAM	HRJ10DJ100T
240	6	9A09567500	RES,CHIP(1/10W),10 OHM J	1	R382	ANAM	HRJ10DJ100T
241	6	9A09567600	RES,CHIP(1/10W),1K OHM J	2	R367, R368	ANAM	HRJ10DJ102T
242	6	9A09567700	RES,CHIP 10DJ103T	2	R301, R302	ANAM	HRJ10DJ103T
243	6	9A09567700	RES,CHIP 10DJ103T	8	R359- R366	ANAM	HRJ10DJ103T
244	6	9A09567700	RES,CHIP 10DJ103T	1	R372	ANAM	HRJ10DJ103T
245	6	9A09567700	RES,CHIP 10DJ103T	1	R377	ANAM	HRJ10DJ103T
246	6	9A09567700	RES,CHIP 10DJ103T	2	R407, R408	ANAM	HRJ10DJ103T

247	9A09567700	RES,CHIP 10DJ103T	2	R427, R428	ANAM	HRJ10DJ103T
248	9A09567700	RES,CHIP 10DJ103T	2	R447, R448	ANAM	HRJ10DJ103T
249	9A09567700	RES,CHIP 10DJ103T	2	R509, R510	ANAM	HRJ10DJ103T
250	9A09567700	RES,CHIP 10DJ103T	2	R527, R528	ANAM	HRJ10DJ103T
251	9A09567700	RES,CHIP 10DJ103T	1	R530	ANAM	HRJ10DJ103T
252	9A09567900	RES,CHIP 10DJ113T	1	R522	ANAM	HRJ10DJ113T
253	9A09568000	RES,CHIP 10DJ153T	4	R517- R520	ANAM	HRJ10DJ153T
254	9A09568100	RES,CHIP 10DJ183T	1	R341	ANAM	HRJ10DJ183T
255	9A09568300	RES,CHIP 10DJ222T	2	R405, R406	ANAM	HRJ10DJ222T
256	9A09568300	RES,CHIP 10DJ222T	3	R424- R426	ANAM	HRJ10DJ222T
257	9A09568300	RES,CHIP 10DJ222T	2	R445, R446	ANAM	HRJ10DJ222T
258	9A09568300	RES,CHIP 10DJ222T	2	R525, R526	ANAM	HRJ10DJ222T
259	9A09568400	RES,CHIP 10DJ223T	1	R524	ANAM	HRJ10DJ223T
260	9A09568600	RES,CHIP 10DJ332T	2	R354, R355	ANAM	HRJ10DJ332T
261	9A09568700	RES,CHIP 10DJ333T	2	R376, R378	ANAM	HRJ10DJ333T
262	9A09568900	RES,CHIP 10DJ471T	2	R305, R306	ANAM	HRJ10DJ471T
263	9A09568900	RES,CHIP 10DJ471T	3	R329- R331	ANAM	HRJ10DJ471T
264	9A09568900	RES,CHIP 10DJ471T	1	R343	ANAM	HRJ10DJ471T
265	9A09568900	RES,CHIP 10DJ471T	2	R357, R358	ANAM	HRJ10DJ471T
266	9A09568900	RES,CHIP 10DJ471T	1	R379	ANAM	HRJ10DJ471T
267	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R401, R402	ANAM	HRJ10DJ473T
268	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R413, R414	ANAM	HRJ10DJ473T
269	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R421, R422	ANAM	HRJ10DJ473T
270	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R433, R434	ANAM	HRJ10DJ473T
271	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R441, R442	ANAM	HRJ10DJ473T
272	9A09569000	RES,CHIP(1/10W),47K OHM J	2	R453, R454	ANAM	HRJ10DJ473T
273	9A09569100	RES,CHIP 10DJ474T	4	R505- R508	ANAM	HRJ10DJ474T
274	9A09569600	RES,CHIP 10DJ822T	1	R521	ANAM	HRJ10DJ822T
275	9A09570400	IC,GENERATOR	1	IC51	ANAM	HVITC2000
276	9A09578800	PCB,AMP & DSP	0,5		ANAM	CUP11526Y
277	9A09601400	CAP,CHIP S1H221JA	2	C405, C406	ANAM	HCUS1H221JA
278	9A09601400	CAP,CHIP S1H221JA	1	C425	ANAM	HCUS1H221JA
279	9A09601400	CAP,CHIP S1H221JA	2	C445, C446	ANAM	HCUS1H221JA
280	9A09601500	CAP,CHIP S1H222KC	2	C305, C306	ANAM	HCUS1H222KC
281	9A09601500	CAP,CHIP S1H222KC	1	C349	ANAM	HCUS1H222KC
282	9A09601500	CAP,CHIP S1H222KC	2	C403, C404	ANAM	HCUS1H222KC
283	9A09601500	CAP,CHIP S1H222KC	2	C423, C424	ANAM	HCUS1H222KC
284	9A09601500	CAP,CHIP S1H222KC	2	C443, C444	ANAM	HCUS1H222KC
285	9A09601600	CAP,CHIP S1H330JA	2	C313, C314	ANAM	HCUS1H330JA
286	9A09601600	CAP,CHIP S1H330JA	2	C321, C322	ANAM	HCUS1H330JA
287	9A09602000	BEAD,FERRITE(CHIP)	2	L332, L344	ANAM	HLZ9J003Z
288	9A09602000	BEAD,FERRITE(CHIP)	2	L501, L502	ANAM	HLZ9J003Z
289	9A09602000	BEAD,FERRITE(CHIP)	1	L545	ANAM	HLZ9J003Z
290	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R307, R308	ANAM	HRJ10DJ101T
291	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R311	ANAM	HRJ10DJ101T
292	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R328	ANAM	HRJ10DJ101T
293	9A09602300	RES,CHIP (1/10W)100 OHM J	1	R342	ANAM	HRJ10DJ101T
294	9A09602300	RES,CHIP (1/10W)100 OHM J	3	R369- R371	ANAM	HRJ10DJ101T
295	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R409, R410	ANAM	HRJ10DJ101T
296	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R415, R416	ANAM	HRJ10DJ101T

297	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R429, R430	ANAM	HRJ10DJ101T
298	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R435, R436	ANAM	HRJ10DJ101T
299	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R449, R450	ANAM	HRJ10DJ101T
300	·····6	9A09602300	RES,CHIP (1/10W)100 OHM J	2	R455, R456	ANAM	HRJ10DJ101T
301	·····6	9A09602400	RES,CHIP (1/10W)	1	R321	ANAM	HRJ10DJ105T
302	·····6	9A09602600	RES,CHIP 10DJ123T	2	R303, R304	ANAM	HRJ10DJ123T
303	·····6	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R353	ANAM	HRJ10DJ331T
304	·····6	9A09603000	RES,CHIP(1/10W) 330 OHM J	1	R375	ANAM	HRJ10DJ331T
305	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R380, R381	ANAM	HRJ10DJ472T
306	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R403, R404	ANAM	HRJ10DJ472T
307	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	1	R423	ANAM	HRJ10DJ472T
308	·····6	9A09603100	RES,CHIP(1/10W)4.7K OHM J	2	R443, R444	ANAM	HRJ10DJ472T
309	·····6	9A09603700	IC,DIR+CODEC	1	IC32	ANAM	HVIAK4586VQ
310	·····6	9A09603900	IC,DSP	1	IC35	ANAM	HVICS493264-CL
311	·····6	9A09604800	TR,CHIP KRA102S	1	Q503	ANAM	HVTKRA102S
312	·····6	9A09605000	TR,CHIP KRC102S	2	Q501, Q502	ANAM	HVTKRC102S
313	·····6	9A09605000	TR,CHIP KRC102S	2	Q505, Q506	ANAM	HVTKRC102S
314	·····6	9A09605000	TR,CHIP KRC102S	1	Q561	ANAM	HVTKRC102S
315	·····6	9A09609500	RES,CHIP 10DJ122T	4	R513- R516	ANAM	HRJ10DJ122T
316	·····6	9A09609600	RES,CHIP 10DJ203T	2	R503, R504	ANAM	HRJ10DJ203T
317	·····6	9A09609600	RES,CHIP 10DJ203T	2	R511, R512	ANAM	HRJ10DJ203T
318	·····6	9A09614000	COIL,CHIP(22UH,K)	2	L311, L331	ANAM	HLZ9M011Z
319	·····6	9A09614000	COIL,CHIP(22UH,K)	1	L333	ANAM	HLZ9M011Z
320	·····6	9A09614000	COIL,CHIP(22UH,K)	3	L351- L353	ANAM	HLZ9M011Z
321	·····6	9A09614000	COIL,CHIP(22UH,K)	2	L566, L567	ANAM	HLZ9M011Z
322	·····6	9A09614400	RES,CHIP (1/10W)	1	R564	ANAM	HRJ10DJ470T
323	·····6	9A09614700	DIODE,SCHOTTKEY BARRIER	2	D562, D563	ANAM	HVDRB160L60TE25
324	·····6	9A09614700	DIODE,SCHOTTKEY BARRIER	1	D565	ANAM	HVDRB160L60TE25
325	·····6	9A09615700	IC,AND GATE(QUAD/2IN L/V)	1	IC34	ANAM	HVI74LCX08MX
326	····5	9A09603500	DIODE,ZENER	1	D354	ANAM	HVDMTZJ4.3CT
327	····5	9A09612500	RES , CARBON	1	R565	ANAM	CRD25TJ562T
328	····5	9A09614100	CRYSTAL(HC-49/S,ATS)	1	X321	ANAM	HOX12288E220TF
329	···4	9A09608200	PLATE , HEAT SINK	1		ANAM	CMY1A200
330	···4	9A09612800	WIRE ASS'Y	1	BN52	ANAM	CWB1E906150BM
331	···4	9A09613800	MODULE , OPTICAL(RECEIVE)	1	JK32	ANAM	HJSTORX179
332	··3	9A09578920	MAIN PCB ASSY EUR/UK	1		ANAM	COP11527B
333	···4	9A05329300	WAFER MOLEX 5267-04A	1	CN64	ANAM	KJP04GA01ZM
334	···4	9A06230200	JACK , REMOTE(2P)	1	JK13	ANAM	KJJ4N023Z
335	···4	9A06861800	JACK,HEADPHONE	1	JK14	ANAM	BJJ2E021Z
336	···4	9A07889700	WAFER MOLEX35336-0610	1	CN31	ANAM	KJP06GA98ZM
337	···4	9A08036600	WAFER,MOLEX35336-1010	1	CN51	ANAM	KJP10GA98ZM
338	···4	9A08126400	JACK,HEADPHONE(SILVER)	1	JK91	ANAM	HJJ2D003Y
339	···4	9A08152300	SCART CONNECTOR	1	JK23	ANAM	KJP21GA118ZP
340	···4	9A08163400	IC,OP AMP NJM2068MD	1	IC12	ANAM	HVINJM2068MDTE1
341	···4	9A08163400	IC,OP AMP NJM2068MD	2	IC71, IC72	ANAM	HVINJM2068MDTE1
342	···4	9A08163400	IC,OP AMP NJM2068MD	3	IC75- IC77	ANAM	HVINJM2068MDTE1
343	···4	9A08163500	IC,NJM4556AL	1	IC78	ANAM	HVINJM4556AL
344	···4	9A08219500	WAFER	1	CN65	ANAM	KJP02GA68ZG
345	···4	9A08563600	SENSOR,REMOCON	1	RC91	ANAM	KRVHIM602H32
346	···4	9A08789600	WAFER , CARD CABLE (21P 1	4	CN14, CN15	ANAM	KJP21GA117ZG

347	···4	9A08789600	WAFER , CARD CABLE (21P 1	1	CN33	ANAM	KJP21GA117ZG
348	···4	9A08877300	BRACKET,FLT	2	BK91, BK92	ANAM	CMD1A374
349	···4	9A08879000	CRYSTAL	1	X901	ANAM	HOX08000E160C
350	···4	9A09035100	RES,CARBON	1	R848	ANAM	CRD25TJ270T
351	···4	9A09256100	JACK,IN/OUT	1	JK22	ANAM	KJJ4S014Z
352	···4	9A09275000	CAP,GOLD	1	C906	ANAM	BCES0HD104
353	···4	9A09278800	JACK,(S-VIDEO+VHS)	1	JK21	ANAM	KJJ9N003Z
354	···4	9A09279500	WAFER, CARD CABLE	1	CN13	ANAM	KJP13GA115ZG
355	···4	9A09285700	FLEXIBLE CONNECTOR(PLUG)	2	CN71, CN72	ANAM	BJP26GA133ZK
356	···4	9A09285800	FLEXIBLE CONNECTOR(SOCKE	2	BN71, BN72	ANAM	BJP26GB132ZK
357	···4	9A09339900	ENCODER	1	VR91	ANAM	HSR2A015Z
358	···4	9A09340400	IC,FUNCTION	1	IC11	ANAM	HVITC9164AF
359	···4	9A09556200	IC,HVIANAM1351DAT (PRGMD)	1	IC91	ANAM	HVIANAM1351DAT
360	···4	9A09559000	JACK,BOARD CJJ4R020Z	2	JK11, JK12	ANAM	CJJ4R020Z
361	···4	9A09563300	BLUE L.E.D	2	D955, D956	ANAM	CVDLEBBL33T0
362	···4	9A09563500	WIRE ASS'Y	1	BN65	ANAM	CWB1C906050EN
363	···4	9A09563700	WIRE ASS'Y	1	BN67	ANAM	CWB1D007070BM
364	···4	9A09571000	F.I.P	1	FIP1	ANAM	KFLHNA11SM28
365	···4	9A09579020	MAIN PCB AUTO ASSY EUR/UK	1		ANAM	CIP11527B
366	····5	9A01387400	TR,KSA733CYT	5	Q241- Q245	ANAM	KVTKSA733CYT
367	····5	9A03745000	TR,KSC2785-YTA	1	Q841	ANAM	KVTKSC2785YT
368	····5	9A05194600	DIODE,1N4003SRT	2	D901, D902	ANAM	KVD1N4003SRT
369	····5	9A05319600	C,CERAMIC 220PF/50V K	7	C211- C217	ANAM	KCBS1H221KBT
370	····5	9A05319600	C,CERAMIC 220PF/50V K	2	C219, C220	ANAM	KCBS1H221KBT
371	····5	9A07874500	RES,CARBON 10 OHM 1/5W	2	R168, R169	ANAM	CRD20TJ100T
372	····5	9A07874500	RES,CARBON 10 OHM 1/5W	1	R906	ANAM	CRD20TJ100T
373	····5	9A07874500	RES,CARBON 10 OHM 1/5W	1	R953	ANAM	CRD20TJ100T
374	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R131, R132	ANAM	CRD20TJ101T
375	····5	9A07874600	RES,CARBON 100 OHM 1/5W	4	R143- R146	ANAM	CRD20TJ101T
376	····5	9A07874600	RES,CARBON 100 OHM 1/5W	4	R721- R724	ANAM	CRD20TJ101T
377	····5	9A07874600	RES,CARBON 100 OHM 1/5W	1	R728	ANAM	CRD20TJ101T
378	····5	9A07874600	RES,CARBON 100 OHM 1/5W	3	R747- R749	ANAM	CRD20TJ101T
379	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R767, R768	ANAM	CRD20TJ101T
380	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R783, R784	ANAM	CRD20TJ101T
381	····5	9A07874600	RES,CARBON 100 OHM 1/5W	2	R803, R804	ANAM	CRD20TJ101T
382	····5	9A07874600	RES,CARBON 100 OHM 1/5W	1	R831	ANAM	CRD20TJ101T
383	····5	9A07874600	RES,CARBON 100 OHM 1/5W	1	R980	ANAM	CRD20TJ101T
384	····5	9A07874700	RES,CARBON 1K OHM 1/5W	4	R115- R118	ANAM	CRD20TJ102T
385	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R715, R716	ANAM	CRD20TJ102T
386	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R746	ANAM	CRD20TJ102T
387	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R761, R762	ANAM	CRD20TJ102T
388	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R777, R778	ANAM	CRD20TJ102T
389	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R797, R798	ANAM	CRD20TJ102T
390	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R858, R859	ANAM	CRD20TJ102T
391	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R907	ANAM	CRD20TJ102T
392	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R920, R922	ANAM	CRD20TJ102T
393	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R925	ANAM	CRD20TJ102T
394	····5	9A07874700	RES,CARBON 1K OHM 1/5W	2	R940, R941	ANAM	CRD20TJ102T
395	····5	9A07874700	RES,CARBON 1K OHM 1/5W	1	R972	ANAM	CRD20TJ102T
396	····5	9A07874800	RES,CARBON 10K OHM 1/5W	2	R705, R706	ANAM	CRD20TJ103T

397	····5	9A07874800	RES,CARBON 10K OHM 1/5W	2	R817, R818	ANAM	CRD20TJ103T
398	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R923	ANAM	CRD20TJ103T
399	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R939	ANAM	CRD20TJ103T
400	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R957	ANAM	CRD20TJ103T
401	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R971	ANAM	CRD20TJ103T
402	····5	9A07874800	RES,CARBON 10K OHM 1/5W	1	R979	ANAM	CRD20TJ103T
403	····5	9A07874900	RES,CARBON 100K OHM 1/5W	6	R107- R112	ANAM	CRD20TJ104T
404	····5	9A07874900	RES,CARBON 100K OHM 1/5W	4	R119- R122	ANAM	CRD20TJ104T
405	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R127, R128	ANAM	CRD20TJ104T
406	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R133, R134	ANAM	CRD20TJ104T
407	····5	9A07874900	RES,CARBON 100K OHM 1/5W	2	R151, R152	ANAM	CRD20TJ104T
408	····5	9A07874900	RES,CARBON 100K OHM 1/5W	1	R757	ANAM	CRD20TJ104T
409	····5	9A07875100	RES,CARBON 1.2K OHM 1/5W	1	R963	ANAM	CRD20TJ122T
410	····5	9A07875100	RES,CARBON 1.2K OHM 1/5W	1	R969	ANAM	CRD20TJ122T
411	····5	9A07875200	RES,CARBON 12K OHM	2	R815, R816	ANAM	CRD20TJ123T
412	····5	9A07875200	RES,CARBON 12K OHM	2	R832, R833	ANAM	CRD20TJ123T
413	····5	9A07875200	RES,CARBON 12K OHM	2	R835, R837	ANAM	CRD20TJ123T
414	····5	9A07875200	RES,CARBON 12K OHM	1	R927	ANAM	CRD20TJ123T
415	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R846	ANAM	CRD20TJ152T
416	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R910	ANAM	CRD20TJ152T
417	····5	9A07875400	RES,CARBON 1.5K OHM 1/5W	1	R973	ANAM	CRD20TJ152T
418	····5	9A07875500	RES,CARBON 180 OHM 1/5W	2	R955, R956	ANAM	CRD20TJ181T
419	····5	9A07875600	RES,CARBON 1.8K OHM 1/5W	1	R974	ANAM	CRD20TJ182T
420	····5	9A07875700	RES,CARBON 18K OHM 1/5W	2	R759, R760	ANAM	CRD20TJ183T
421	····5	9A07875800	RES,CARBON 2.2K OHM 1/5W	2	R811, R812	ANAM	CRD20TJ222T
422	····5	9A07875800	RES,CARBON 2.2K OHM 1/5W	1	R841	ANAM	CRD20TJ222T
423	····5	9A07875900	RES,CARBON 22K OHM 1/5W	1	R775	ANAM	CRD20TJ223T
424	····5	9A07875900	RES,CARBON 22K OHM 1/5W	2	R795, R796	ANAM	CRD20TJ223T
425	····5	9A07875900	RES,CARBON 22K OHM 1/5W	1	R834	ANAM	CRD20TJ223T
426	····5	9A07875900	RES,CARBON 22K OHM 1/5W	2	R908, R909	ANAM	CRD20TJ223T
427	····5	9A07875900	RES,CARBON 22K OHM 1/5W	1	R911	ANAM	CRD20TJ223T
428	····5	9A07876000	RES,CARBON 220K OHM 1/5W	2	R141, R142	ANAM	CRD20TJ224T
429	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R167	ANAM	CRD20TJ224T
430	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R769	ANAM	CRD20TJ224T
431	····5	9A07876000	RES,CARBON 220K OHM 1/5W	1	R785	ANAM	CRD20TJ224T
432	····5	9A07876200	RES,CARBON 2.7K OHM	2	R755, R756	ANAM	CRD20TJ272T
433	····5	9A07876200	RES,CARBON 2.7K OHM	2	R961, R962	ANAM	CRD20TJ272T
434	····5	9A07876200	RES,CARBON 2.7K OHM	2	R967, R968	ANAM	CRD20TJ272T
435	····5	9A07876200	RES,CARBON 2.7K OHM	1	R975	ANAM	CRD20TJ272T
436	····5	9A07876400	RES,CARBON 3.3K OHM 1/5W	1	R976	ANAM	CRD20TJ332T
437	····5	9A07876800	RES,CARBON 39K OHM 1/5W	1	R776	ANAM	CRD20TJ393T
438	····5	9A07876900	RES,CARBON 470 OHM 1/5W	6	R101- R106	ANAM	CRD20TJ471T
439	····5	9A07876900	RES,CARBON 470 OHM 1/5W	2	R125, R126	ANAM	CRD20TJ471T
440	····5	9A07876900	RES,CARBON 470 OHM 1/5W	3	R135- R137	ANAM	CRD20TJ471T
441	····5	9A07876900	RES,CARBON 470 OHM 1/5W	2	R153, R154	ANAM	CRD20TJ471T
442	····5	9A07876900	RES,CARBON 470 OHM 1/5W	3	R161- R163	ANAM	CRD20TJ471T
443	····5	9A07876900	RES,CARBON 470 OHM 1/5W	1	R843	ANAM	CRD20TJ471T
444	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R701, R702	ANAM	CRD20TJ472T
445	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R753, R754	ANAM	CRD20TJ472T
446	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R773, R774	ANAM	CRD20TJ472T

447	····5	9A07877000	RES,CARBON 4.7K OHM 1/5W	2	R793, R794	ANAM	CRD20TJ472T
448	····5	9A07877100	RES,CARBON 47K OHM 1/5W	1	R712	ANAM	CRD20TJ473T
449	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R717, R718	ANAM	CRD20TJ473T
450	····5	9A07877100	RES,CARBON 47K OHM 1/5W	1	R727	ANAM	CRD20TJ473T
451	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R751, R752	ANAM	CRD20TJ473T
452	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R763, R764	ANAM	CRD20TJ473T
453	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R771, R772	ANAM	CRD20TJ473T
454	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R779, R780	ANAM	CRD20TJ473T
455	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R791, R792	ANAM	CRD20TJ473T
456	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R799, R800	ANAM	CRD20TJ473T
457	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R813, R814	ANAM	CRD20TJ473T
458	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R821, R822	ANAM	CRD20TJ473T
459	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R842, R845	ANAM	CRD20TJ473T
460	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R924, R926	ANAM	CRD20TJ473T
461	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R959, R960	ANAM	CRD20TJ473T
462	····5	9A07877100	RES,CARBON 47K OHM 1/5W	2	R965, R966	ANAM	CRD20TJ473T
463	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R165, R166	ANAM	CRD20TJ562T
464	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R725, R726	ANAM	CRD20TJ562T
465	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R765, R766	ANAM	CRD20TJ562T
466	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R781, R782	ANAM	CRD20TJ562T
467	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R801, R802	ANAM	CRD20TJ562T
468	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R825, R826	ANAM	CRD20TJ562T
469	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	2	R918, R919	ANAM	CRD20TJ562T
470	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	1	R921	ANAM	CRD20TJ562T
471	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	8	R931- R938	ANAM	CRD20TJ562T
472	····5	9A07877500	RES,CARBON 5.6K OHM 1/5W	1	R977	ANAM	CRD20TJ562T
473	····5	9A07877800	RES,CARBON 7.5K OHM ,	1	R978	ANAM	CRD20TJ752T
474	····5	9A07878500	SW,TACT SKHV10910G	8	S971- S978	ANAM	CST1A012ZT
475	····5	9A07880800	CAP,CERAMIC 0.1UF/50V Z	1	C955	ANAM	HCBS1H104ZFT
476	····5	9A07880800	CAP,CERAMIC 0.1UF/50V Z	2	C974, C975	ANAM	HCBS1H104ZFT
477	····5	9A07881200	CAP,CERAMIC 180PF/50V	3	C747- C749	ANAM	HCBS1H181KBT
478	····5	9A07881200	CAP,CERAMIC 180PF/50V	2	C815, C816	ANAM	HCBS1H181KBT
479	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C939	ANAM	HCBS1H181KBT
480	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C954	ANAM	HCBS1H181KBT
481	····5	9A07881200	CAP,CERAMIC 180PF/50V	1	C971	ANAM	HCBS1H181KBT
482	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C143, C144	ANAM	HCBS1H223ZFT
483	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	3	C161- C163	ANAM	HCBS1H223ZFT
484	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C168, C169	ANAM	HCBS1H223ZFT
485	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C823, C824	ANAM	HCBS1H223ZFT
486	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C904	ANAM	HCBS1H223ZFT
487	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C937	ANAM	HCBS1H223ZFT
488	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C941, C952	ANAM	HCBS1H223ZFT
489	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C961, C962	ANAM	HCBS1H223ZFT
490	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C965, C966	ANAM	HCBS1H223ZFT
491	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	2	C977, C978	ANAM	HCBS1H223ZFT
492	····5	9A07881400	CAP,CERAMIC 0.022UF/50V Z	1	C981	ANAM	HCBS1H223ZFT
493	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C842	ANAM	HCEA0JH102T
494	····5	9A07882100	CAP,ELECT 1000/6.3V	1	C905	ANAM	HCEA0JH102T
495	····5	9A07882300	CAP,ELECT 470/10V	10	C221- C230	ANAM	HCEA1AH471T
496	····5	9A07882300	CAP,ELECT 470/10V	1	C247	ANAM	HCEA1AH471T

497	····5	9A07882300	CAP,ELECT 470/10V	1	C846	ANAM	HCEA1AH471T
498	····5	9A07882300	CAP,ELECT 470/10V	1	C903	ANAM	HCEA1AH471T
499	····5	9A07882400	CAP,ELECT 100UF/16V	2	C255, C257	ANAM	HCEA1CH101T
500	····5	9A07882400	CAP,ELECT 100UF/16V	3	C728- C730	ANAM	HCEA1CH101T
501	····5	9A07882400	CAP,ELECT 100UF/16V	1	C745	ANAM	HCEA1CH101T
502	····5	9A07882400	CAP,ELECT 100UF/16V	2	C819, C820	ANAM	HCEA1CH101T
503	····5	9A07882400	CAP,ELECT 100UF/16V	2	C825, C826	ANAM	HCEA1CH101T
504	····5	9A07882400	CAP,ELECT 100UF/16V	1	C908	ANAM	HCEA1CH101T
505	····5	9A07882600	CAP,ELECT 220/16V	1	C845	ANAM	HCEA1CH221T
506	····5	9A07882600	CAP,ELECT 220/16V	1	C848	ANAM	HCEA1CH221T
507	····5	9A07882900	CAP,ELECT 47/16V (S)	2	C737, C738	ANAM	HCEA1CKS100T
508	····5	9A07883000	CAP,ELECT 47/25V	3	C241- C243	ANAM	HCEA1EH470T
509	····5	9A07883000	CAP,ELECT 47/25V	2	C907, C909	ANAM	HCEA1EH470T
510	····5	9A07883000	CAP,ELECT 47/25V	1	C918	ANAM	HCEA1EH470T
511	····5	9A07883500	CAP,ELECT 2.2UF/50V	1	C938	ANAM	HCEA1HH2R2T
512	····5	9A07883800	CAP,ELECT 47/50V	1	C925	ANAM	HCEA1HH470T
513	····5	9A07884100	CAP,ELECT 100/35V	1	C835	ANAM	HCEA1VH101T
514	····5	9A07886600	COIL,AXAIL 10UH	1	L901	ANAM	HLQ02C100KT
515	····5	9A07887900	TR,KSB811YT	1	Q909	ANAM	HVTKSB811YT
516	····5	9A07888000	TR,KSC2316YT	1	Q831	ANAM	HVTKSC2316YT
517	····5	9A07888000	TR,KSC2316YT	1	Q923	ANAM	HVTKSC2316YT
518	····5	9A07894800	RES,CARBON CRD20TJ1R0T	1	R982	ANAM	CRD20TJ1R0T
519	····5	9A07894900	RES,CARBON CRD20TJ221T	1	R958	ANAM	CRD20TJ221T
520	····5	9A07895300	RES,CARBON CRD20TJ331T	7	R729- R735	ANAM	CRD20TJ331T
521	····5	9A07895300	RES,CARBON CRD20TJ331T	6	R852- R857	ANAM	CRD20TJ331T
522	····5	9A07895300	RES,CARBON CRD20TJ331T	1	R954	ANAM	CRD20TJ331T
523	····5	9A07896900	CAP,CERAMIC HCBS1H681KBT	2	C208, C209	ANAM	HCBS1H681KBT
524	····5	9A07896900	CAP,CERAMIC HCBS1H681KBT	1	C218	ANAM	HCBS1H681KBT
525	····5	9A07897000	CAP,ELECT HCEA1CH471T	2	C131, C132	ANAM	HCEA1CH471T
526	····5	9A07897000	CAP,ELECT HCEA1CH471T	1	C841	ANAM	HCEA1CH471T
527	····5	9A07897000	CAP,ELECT HCEA1CH471T	1	C851	ANAM	HCEA1CH471T
528	····5	9A07897400	CAP,ELECT HCEA1HH0R1T	1	C910	ANAM	HCEA1HH0R1T
529	····5	9A07897700	CAP,ELECT HCEA1HKS1R0T	1	C976	ANAM	HCEA1HKS1R0T
530	····5	9A07898000	CAP,MYLAR HCQI1H153JZT	2	C741, C742	ANAM	HCQI1H153JZT
531	····5	9A07898600	TR,KSD1021YT	1	Q928	ANAM	HVTKSD1021YT
532	····5	9A07901800	RES,CARBON CRD20TJ4R7T	2	R819, R820	ANAM	CRD20TJ4R7T
533	····5	9A07901800	RES,CARBON CRD20TJ4R7T	1	R851	ANAM	CRD20TJ4R7T
534	····5	9A07901900	RES,CARBON CRD20TJ470T	5	R913- R917	ANAM	CRD20TJ470T
535	····5	9A07902900	CAP,CERAMIC 220PF/50V	2	C151, C152	ANAM	HCBS1H221KBT
536	····5	9A07903000	DIODE , ZENER MTZJ7.5A	2	D729, D730	ANAM	HVDMTZJ7.5AT
537	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	2	R703, R704	ANAM	CRD20TJ682T
538	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	5	R707- R711	ANAM	CRD20TJ682T
539	····5	9A07918000	RES,CARBON 6.8K OHM 1/5W	1	R719	ANAM	CRD20TJ682T
540	····5	9A08218400	CAP,ELECT A1CKS470T	2	C951, C953	ANAM	HCEA1CKS470T
541	····5	9A08878200	DIODE 1SS133T-77	2	D745, D746	ANAM	HVD1SS133MT
542	····5	9A08878200	DIODE 1SS133T-77	2	D781, D831	ANAM	HVD1SS133MT
543	····5	9A08878200	DIODE 1SS133T-77	2	D832, D837	ANAM	HVD1SS133MT
544	····5	9A08878200	DIODE 1SS133T-77	1	D903	ANAM	HVD1SS133MT
545	····5	9A08878200	DIODE 1SS133T-77	2	D907, D909	ANAM	HVD1SS133MT
546	····5	9A08878200	DIODE 1SS133T-77	3	D911- D913	ANAM	HVD1SS133MT

547	····5	9A08905400	CAP,CERAMIC S1H821KBT	7	C201- C207	ANAM	HCBS1H821KBT
548	····5	9A08905400	CAP,CERAMIC S1H821KBT	1	C210	ANAM	HCBS1H821KBT
549	····5	9A08905400	CAP,CERAMIC S1H821KBT	2	C231, C232	ANAM	HCBS1H821KBT
550	····5	9A08905600	CAP,ELECT A1VH100T	2	C145, C146	ANAM	HCEA1VH100T
551	····5	9A08905600	CAP,ELECT A1VH100T	1	C712	ANAM	HCEA1VH100T
552	····5	9A08905600	CAP,ELECT A1VH100T	2	C715, C716	ANAM	HCEA1VH100T
553	····5	9A08905600	CAP,ELECT A1VH100T	1	C727	ANAM	HCEA1VH100T
554	····5	9A08905600	CAP,ELECT A1VH100T	2	C751, C752	ANAM	HCEA1VH100T
555	····5	9A08905600	CAP,ELECT A1VH100T	2	C761, C762	ANAM	HCEA1VH100T
556	····5	9A08905600	CAP,ELECT A1VH100T	2	C771, C772	ANAM	HCEA1VH100T
557	····5	9A08905600	CAP,ELECT A1VH100T	2	C777, C778	ANAM	HCEA1VH100T
558	····5	9A08905600	CAP,ELECT A1VH100T	2	C791, C792	ANAM	HCEA1VH100T
559	····5	9A08905600	CAP,ELECT A1VH100T	2	C797, C798	ANAM	HCEA1VH100T
560	····5	9A08905600	CAP,ELECT A1VH100T	2	C811, C812	ANAM	HCEA1VH100T
561	····5	9A08955200	RES,CARBON 20TJ622T	2	R713, R714	ANAM	CRD20TJ622T
562	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C759, C760	ANAM	CCCT1H470JC
563	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C775, C776	ANAM	CCCT1H470JC
564	····5	9A09336000	CAP,CERAMIC T1H470JC	2	C795, C796	ANAM	CCCT1H470JC
565	····5	9A09336600	CAP,CERAMIC T1H103ZF	4	C721- C724	ANAM	CCKT1H103ZF
566	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C765	ANAM	CCKT1H103ZF
567	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C767, C768	ANAM	CCKT1H103ZF
568	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C781	ANAM	CCKT1H103ZF
569	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C783, C784	ANAM	CCKT1H103ZF
570	····5	9A09336600	CAP,CERAMIC T1H103ZF	1	C801	ANAM	CCKT1H103ZF
571	····5	9A09336600	CAP,CERAMIC T1H103ZF	2	C803, C804	ANAM	CCKT1H103ZF
572	····5	9A09336800	CAP,CERAMIC T1H151KB	6	C107- C112	ANAM	CCKT1H151KB
573	····5	9A09336800	CAP,CERAMIC T1H151KB	4	C119- C122	ANAM	CCKT1H151KB
574	····5	9A09336800	CAP,CERAMIC T1H151KB	2	C127, C128	ANAM	CCKT1H151KB
575	····5	9A09336900	CAP,CERAMIC T1H181KB	1	C711	ANAM	CCKT1H181KB
576	····5	9A09336900	CAP,CERAMIC T1H181KB	2	C713, C714	ANAM	CCKT1H181KB
577	····5	9A09336900	CAP,CERAMIC T1H181KB	3	C733- C735	ANAM	CCKT1H181KB
578	····5	9A09336900	CAP,CERAMIC T1H181KB	1	C757	ANAM	CCKT1H181KB
579	····5	9A09336900	CAP,CERAMIC T1H181KB	4	C854- C857	ANAM	CCKT1H181KB
580	····5	9A09337300	CAP,CERAMIC T1H471KB	3	C135- C137	ANAM	CCKT1H471KB
581	····5	9A09344300	CAP,CERAMIC S1H470JT	2	C813, C814	ANAM	HCBS1H470JT
582	····5	9A09344300	CAP,CERAMIC S1H470JT	5	C913- C917	ANAM	HCBS1H470JT
583	····5	9A09344400	L.E.D , YELLOW	1	D958	ANAM	HVD342YCTB7T089
584	····5	9A09557200	CAP,CERAMIC T1H104ZF	1	C746	ANAM	CCKT1H104ZF
585	····5	9A09570800	CAP,FILM E1J334JBT	2	C743, C744	ANAM	KCFE1J334JBT
586	····5	9A09579100	MAIN PCB	1		ANAM	CUP11527Y
587	····5	9A09600900	CAP,MYLAR I1H822JZT	1	C726	ANAM	HCQI1H822JZT
588	····5	9A09600900	CAP,MYLAR I1H822JZT	2	C739, C740	ANAM	HCQI1H822JZT
589	····5	9A09604700	TR,KRA102MT	1	Q167	ANAM	HVTKRA102MT
590	····5	9A09604700	TR,KRA102MT	1	Q247	ANAM	HVTKRA102MT
591	····5	9A09604700	TR,KRA102MT	2	Q726, Q745	ANAM	HVTKRA102MT
592	····5	9A09604700	TR,KRA102MT	2	Q835, Q836	ANAM	HVTKRA102MT
593	····5	9A09604700	TR,KRA102MT	1	Q917	ANAM	HVTKRA102MT
594	····5	9A09604700	TR,KRA102MT	2	Q924, Q927	ANAM	HVTKRA102MT
595	····5	9A09604700	TR,KRA102MT	2	Q938, Q953	ANAM	HVTKRA102MT
596	····5	9A09604900	TR,KRC102MT	1	Q246	ANAM	HVTKRC102MT

597	····5	9A09604900	TR,KRC102MT	2	Q248, Q255	ANAM	HVTKRC102MT
598	····5	9A09604900	TR,KRC102MT	2	Q833, Q834	ANAM	HVTKRC102MT
599	····5	9A09604900	TR,KRC102MT	2	Q837, Q838	ANAM	HVTKRC102MT
600	····5	9A09604900	TR,KRC102MT	1	Q845	ANAM	HVTKRC102MT
601	····5	9A09604900	TR,KRC102MT	1	Q918	ANAM	HVTKRC102MT
602	····5	9A09604900	TR,KRC102MT	2	Q932, Q933	ANAM	HVTKRC102MT
603	····5	9A09604900	TR,KRC102MT	2	Q937, Q939	ANAM	HVTKRC102MT
604	····5	9A09604900	TR,KRC102MT	2	Q954, Q955	ANAM	HVTKRC102MT
605	····5	9A09604900	TR,KRC102MT	2	Q957, Q958	ANAM	HVTKRC102MT
606	····5	9A09612400	RES,CARBON 20TJ270T	2	R823, R824	ANAM	CRD20TJ270T
607	····5	9A09613400	CAP , CERAMIC	2	C901, C902	ANAM	HCBS1H180JT
608	····5	9A09613900	COIL	9	L201- L209	ANAM	HLQ02C1R8KT
609	····5	9A09616000	TR,MUTE	2	Q165, Q166	ANAM	HVTKTC2874BT
610	····5	9A09616000	TR,MUTE	1	Q725	ANAM	HVTKTC2874BT
611	····5	9A09616000	TR,MUTE	2	Q765, Q766	ANAM	HVTKTC2874BT
612	····5	9A09616000	TR,MUTE	2	Q781, Q782	ANAM	HVTKTC2874BT
613	····5	9A09616000	TR,MUTE	2	Q801, Q802	ANAM	HVTKTC2874BT
614	····5	9A09616000	TR,MUTE	2	Q825, Q826	ANAM	HVTKTC2874BT
615	···4	9A09604000	IC,VOLUME	1	IC73	ANAM	HVIM62446AFP
616	···4	9A09604100	IC,EXPANDER	1	IC74	ANAM	HVINJU3713G
617	···4	9A09606100	WAFER	1	CN11	ANAM	KJP15GA98ZM
618	···4	9A09606100	WAFER	1	CN21	ANAM	KJP15GA98ZM
619	···4	9A09606200	WAFER	1	BN11	ANAM	KJP15GB99ZM
620	···4	9A09606200	WAFER	1	BN21	ANAM	KJP15GB99ZM
621	···4	9A09608000	PLATE,EARTH	1		ANAM	CMC1A111
622	···4	9A09614600	VR , ENCODER	1	VR92	ANAM	HSR2A018Z
623	···4	9A09614800	IC,VIDEO SWITCH	1	IC21	ANAM	HVIBA7609F
624	···4	9A09615900	T.R	2	Q842, Q846	ANAM	HVTKSB1151Y
625	···4	9A09616500	WAFER, CARD CABLE	1	CN10	ANAM	KJP25GA117ZG
626	··3	9A09595700	INSULATOR,CABLE	1		ANAM	CMX1A138
627	··3	9A09596300	LABEL,FUSE CAUTION	1		ANAM	CQB1A173Z
628	··3	9A09598300	SCREW	2		ANAM	CTB3+8F
629	··3	9A09607200	CUSHION	2		ANAM	CHG1A218
630	··3	9A09607900	FERRITE,RING	1		ANAM	CLZ9W003Z
631	··3	9A09609400	FOOT	4		ANAM	HKL1A074Z
632	··3	9A09611200	CUSHION,MECHA	2		ANAM	CHG1A239
633	··3	9A09611420	REAR PANEL	1		ANAM	CKF1A238Z
634	··3	9A09611500	BRACKET,PCB	1		ANAM	CMD1A395
635	··3	9A09611700	INSULATOR,SMPS	1		ANAM	CMX2A133
636	··3	9A09611820	MODULE,TUNER	1		ANAM	CNVMV114MA1-17
637	··3	9A09611920	SMPS PCB ASS'Y EUR	1		ANAM	COPDDS115A
638	···4	9A09612720	PCB,SMPS	1		ANAM	CUPDDS115A
639	··3	9A09612600	CHAASIS,BOTTOM	1		ANAM	CUA2A216
640	··3	9A09612900	CARD CABLE	3		ANAM	CWC1B4A21A100B6
641	··3	9A09613000	CABLE,CARD	1		ANAM	CWC1C4A13B080B
642	··3	9A09616700	SHIELD,CUSHION	1		ANAM	KMC1A196
643	·2	9A09598400	SCREW	2		ANAM	CTB4+6FFC
644	·2	9A09607700	TOP CABINET	1		ANAM	CKC1B131S35
645	1	9A09579230	INSTRUCTION MNL ASSY UK	1		ANAM	CQXDRL700UKCC
646	·2	9A06752300	STAPLE 0905	3		ANAM	KPL0905

647	·2	9A08125700	BAG,POLY	2		ANAM	CPB1061Y
648	·2	9A09055200	BATTERY	2		ANAM	HABAAM1.5V
649	·2	9A09478500	OWN MNL,EFS-EUR DR-L700	1		ANAM	CQX1A791Z
650	·2	9A09562100	AM LOOP ANT	1		ANAM	CSA1A020Z
651	·2	9A09572700	FM 1 POLE ANT	1		ANAM	CSA1A018Z
652	·2	9A09610220	REMOCON ASS'Y EUR	1		ANAM	CARTDRL700EUR
653	·2	9A09611300	CORD.PIN (1P)	1		ANAM	CJS4M023Z
654	1	9A09596600	LABEL,DTS	1		ANAM	CQB1A582Z
655	1	9A09608300	PAD,SNOW(L)	1		ANAM	CPS1A579
656	1	9A09608400	PAD,SNOW(R)	1		ANAM	CPS1A580
657	1	9A09612000	BOX,OUT CARTON	1		ANAM	CPG1A689Z
658	1	9A09612100	PAD,GUIDE	1		ANAM	CPG1A715
659	1	9A09612220	CODE,RESION EUR,UK	2		ANAM	CQE1A183Z
660	1	9A09612300	LABEL,CLASS1 LASER	1		ANAM	CQX1A293Z
661	1	9A05326600	CLAMPER,ARM	1		ANAM	KHE154
662	1	9A05335600	LABEL,SERIAL NO	2		ANAM	KQT1A046
663	1	9A05983800	TAPE,OPP CLEAR 50M/M	1		ANAM	K4FC500CL
664	1	9A06751300	STAPLE 6500	8		ANAM	KPL6500
665	1	9A07005300	TAPE,P.P	1		ANAM	K4FC240CL
666	1	9A07052700	RIBON,BAR CODE	1		ANAM	KQS1A001
667	1	9A07874100	BAG,POLY(SET) H-100	1		ANAM	CPP1A082Z
668	1	9A08957800	BAG,POLY	1		ANAM	CPB1A008Z
669	1	9A09561300	LABEL,BAR CODE	2		ANAM	CQT1A144